

LET'S MAKE THE WORLD
BRIGHTER.



03	LED Bulbs
21	LED Battens & Tubes
33	LED Spot Lights
37	LED Downlights
49	LED Recessed Panel Lights
71	LED Surface Panel Lights
81	LED Track Lights
85	LED Strip Lights & Rope Lights

91	LED Weatherproof Battens
95	LED Bulkhead
99	LED Canopy Lights
103	LED Well glass
107	LED High-bay
113	LED Flood Lights
123	LED Street Lights

SYSKA LED Lights offer smart innovations for the future of lighting. Advanced technology, energy efficiency and durability put SYSKA LED light years ahead, giving it a clear edge in today's market. Every LED light made by SYSKA LED is crafted to meet global standards. SYSKA LED Lights not only have the right technology, but also perform with ease. They are developed specially to optimise their output, outshining many other lights in the market.

SYSKA LED Lights are of superior quality and are available at an affordable price. SYSKA LED Lights offer a wide range of international quality LED lighting solutions, for varied applications providing effective and energy-efficient lighting in any environment. Their usage ranges from residential and retail, to commercial and industrial applications. SYSKA LED Lights are fully integrated into the systematic structure of the overall product range. This allows lighting designers the freedom to use LED lighting tools, and seamlessly combine them with conventional products. Principal products are UL/CE certified bearing LM79 test reports with LM80 certified LEDs. As the future unfolds, SYSKA LED will play a pivotal role in shifting lighting usage from energy consuming conventional CFL lighting to LEDs.



LED BULBS

From traditional CFL bulbs it's best to switch to Syska LED bulbs. The complete range of LED bulbs emit a brighter glow, consume less power and are environment-friendly.



LED LAMPS 0.5W-B22



Replace your 'zero-watt' bulbs with this hero. You can also leave the bulb on for the entire night as it consumes a fraction of one watt and provides significant power saving.

Details	SSK-PAG-0.5W-W	SSK-PAG-0.5W-Y	SSK-PAG-0.5W-R	SSK-PAG-0.5W-G	SSK-PAG-0.5W-B	SSK-PAG-0.5W-O	SSK-PAG-0.5W-P
Input Power	0.5W						
Holder Base	B22						
Size (mm)	Ø 30 x 78 (H)						
Input Voltage Range	AC 90-300V, 50Hz						
Colour	White	Yellow	Red	Green	Blue	Orange	Pink
Beam Angle	270°						
Lumens	>30lm						
Ingress Protection	IP20						
Operating Temperature Range	-10°C ~ 50°C						
Power Factor	>0.9						
Housing	Thermoplastic + Aluminium						



Energy saving and lower power consumption



No UV radiation




Wide operating voltage



Eco-friendly



Retrofit

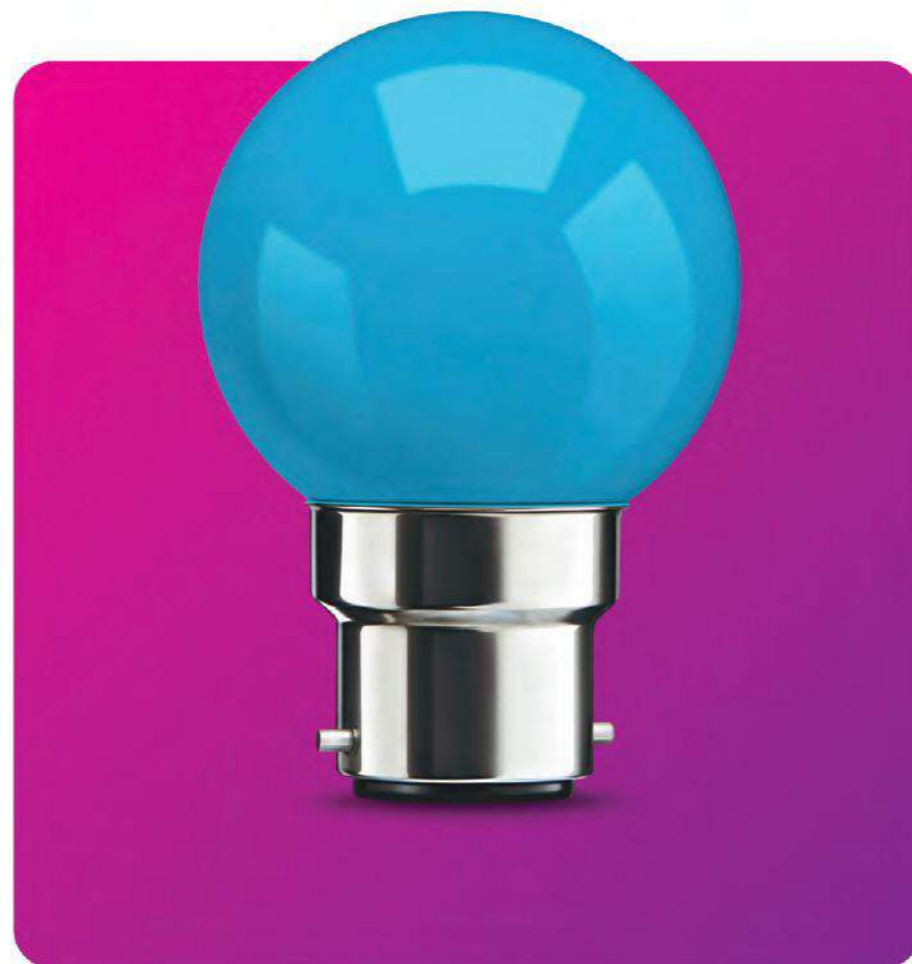

SSK-NLP-0.5W



Here's an LED Bulb that simply needs to be plugged in and powered on! The bulb saves up to 70% of power, is eco-friendly and super bright!

Details	SSK-NLP-0.5W
Input Power	0.5W
Holder Base	B22
Size (mm)	Ø 36 x 68 x 70 (H)
Input Voltage Range	AC 90-300V, 50Hz
Colour	6500K/3000K/Yellow/Red/Green/Blue/Pink
Beam Angle	270°
Lumens	>30lm
Ingress Protection	IP20
Operating Temperature Range	-10°C ~ 50°C
Power Factor	>0.9
Housing	Thermoplastic



Energy saving and lower power consumption



No UV radiation



For Indoor Use



Plug & Play



2 Pin AC Input



SSK-PAG-0.5W-AUTO

Replace your 'zero-watt' bulbs with this hero. You can also leave the bulb on for the entire night as it consumes a fraction of one watt and provides significant power saving. The bulb comes with an auto-colour mode that keeps changing colours when switched ON.

Details	SSK-PAG-0.5W-AUTO
Input Power	0.5W
Holder Base	B22
Size (mm)	Ø 30 x 78 (H)
Input Voltage Range	AC 90-300V, 50Hz
Colour	White-Yellow-Red-Green-Blue-Orange-Pink
Beam Angle	270°
Lumens	>30lm
Ingress Protection	IP20
Operating Temperature Range	-10°C ~ 50°C
Power Factor	>0.9
Housing	Thermoplastic + Aluminium



Energy saving and lower power consumption



No UV radiation



Wide operating voltage



Eco-friendly



Retrofit



LED BULB-LMS SERIES

When it comes to saving energy, the Syska Lumi Star shines the brightest! A perfect replacement for CFL bulbs, these lights are energy efficient (4-star rating) and are ideal to light up homes and office spaces.

Details	SSK-LMS-9W
Input Power	9W
Holder Base	B22/E27
Size (mm)	Ø 60 x 115 (H)
Input Voltage Range	AC 90-300V, 50Hz
Colour Temperature	6500K/4000K/3000K
CRI	>75
Beam Angle	>300°
Lumens	>1080lm
Ingress Protection	IP20
Operating Temperature Range	-10°C ~ 50°C
Power Factor	>0.9
Housing	Thermoplastic + Aluminium



Eco-friendly



Replacement for CFL bulbs



Wide operating voltage



B22/E27 Base



No UV radiation



Energy saving and lower power consumption



LED DOB BULB-PAG SERIES



Time to switch from CFL to LED Bulbs. LED bulbs consume less power and emit no UV rays, with plastic-aluminium Thermal Management Technology they last longer and do not heat up.

Details	SSK-PAG-3W-iLED	SSK-PAG-5W-iLED	SSK-PAG-7W-iLED	SSK-PAG-9W-iLED	SSK-PAG-12W-iLED	SSK-PAG-15W-iLED	SSK-PAG-18W-iLED	SSK-PAG-20W-iLED
Input Power	3W	5W	7W	9W	12W	15W	18W	20W
Holder Base	B22/E27							
Size (mm)	Ø50x95 (H)		Ø60 x 110 (H)		Ø65x122 (H)	Ø70x135 (H)	Ø80 x 152 (H)	
Input Voltage	AC 90-300V, 50Hz							
Colour Temperature	6500K/4000K/3000K							
CRI	>75							
Beam Angle	>240°							
Lumens	>315lm	>525lm	>735lm	>945lm	>1260lm	>1575lm	>1890lm	>2100lm
Ingress Protection	IP20							
Operating Temperature Range	-10°C ~ 50°C							
Power Factor	>0.9							
Housing	Thermoplastic + Aluminium							

- Energy saving and lower power consumption
- Replacement for CFL bulbs
- Eco-friendly
- No UV radiation
- Wide operating voltage
- B22/E27 base



BULB - SRL (MAXGLOW)



Max up the illumination of a room with the Syska Maxglow LED Bulb. It ensures maximum savings and is an eco-friendly alternative to CFL bulbs.

Details	SSK-SRL-3W-MG	SSK-SRL-5W-MG	SSK-SRL-7W-MG	SSK-SRL-9W-MG	SSK-SRL-12W-MG	SSK-SRL-15W-MG	SSK-SRL-18W-MG	SSK-SRL-20W-MG
Input Power	3W	5W	7W	9W	12W	15W	18W	20W
Holder Base	B22/E27							
Size (mm)	Ø50 x 95 (H)		Ø57x 100 (H)		Ø65 x 120 (H)		Ø75x 140 (H)	
Input Voltage	AC 90-300V, 50Hz							
Colour Temperature	6500K/4000K/3000K							
CRI	>75							
Beam Angle	>140°							
Lumens	>321lm	>525lm	>735lm	>945lm	>1260lm	>1575lm	>1890lm	>2100lm
Ingress Protection	IP20							
Operating Temperature Range	-10°C ~ 50°C							
Power Factor	>0.9							
Housing	Thermoplastic + Aluminium							

- Energy saving and lower power consumption
- No UV radiation
- Replacement for CFL bulbs
- Wide operating voltage
- Eco-friendly
- B22/E27 Base



LED DC BULB

Max up the illumination of a room with the Syska LED DC Bulb. It ensures maximum savings and is an eco-friendly alternative to CFL bulbs.


Details	SSK-SRL-DC-5W	SSK-SRL-DC-7W	SSK-SRL-DC-9W
Input Power	5W	7W	9W
Holder Base	B22/E27		
Size (mm)	Ø57x 100(H)		
Input Voltage	DC 12V		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>140°		
Lumens	>500lm	>700lm	>900lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Power Factor	>0.9		
Housing	Aluminium + Thermoplastic		



LED HAMMER BULB (ILED)

Amp up the lighting of a room with this iLED Bulb. The bulb emits a widespread of light and is extremely energy efficient.

Details	SSK-HAB-P-26W	SSK-HAB-P-35W	SSK-HAB-P-45W
Input Power	26W	35W	45W
Holder Base	B22/E27		
Size (mm)	Ø100 x 183 (H)	Ø118 x 191 (H)	Ø138 x 220 (H)
Input Voltage	AC 90-300V, 50Hz		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>220°		
Lumens	>2860lm	>3850lm	>4950lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Power Factor	>0.9		
Housing	Aluminium + Thermoplastic		

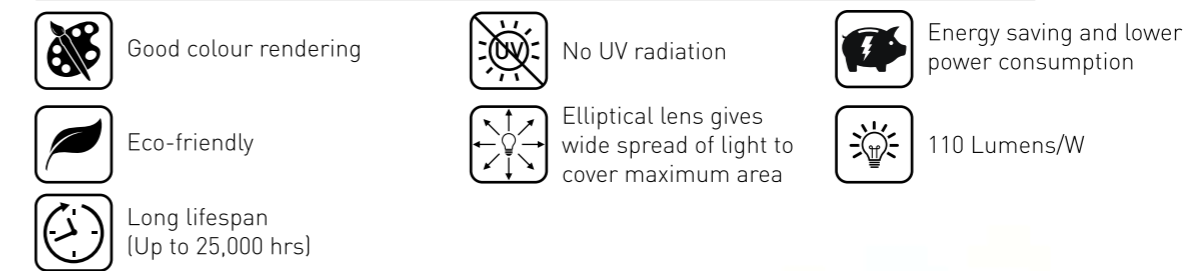

LED HAMMER BULB (iLED MINI SERIES)

Ace at creating a bright space with this iLED Mini Series Bulb. The bulb emits a widespread of light and is extremely energy efficient.



Details	SSK-HAB-P-MINI-23W	SSK-HAB-P-MINI-30W	SSK-HAB-P-MINI-40W	SSK-HAB-P-MINI-50W
Input Power	23W	30W	40W	50W
Holder Base	B22/E27			
Size (mm)	Ø80 x 120 (H)	Ø100 x 150 (H)	Ø117 x 170 (H)	Ø125 x 195 (H)
Input Voltage	AC 90-300V, 50Hz			
Colour Temperature	6500K/4000K/3000K			
CRI	>75			
Beam Angle	>220°			
Lumens	>2300lm	>3000lm	>4000lm	>5000lm
Ingress Protection	IP20			
Operating Temperature Range	-10°C ~ 50°C			
Power Factor	>0.9			
Housing	Aluminium + Thermoplastic			



Good colour rendering



No UV radiation



Energy saving and lower power consumption



Eco-friendly



Elliptical lens gives wide spread of light to cover maximum area



Long lifespan (Up to 25,000 hrs)



LED SMART BULB

We are changing the way people light up their homes, one Smart LED Bulb at a time. These bulbs offer multiple shades that are great for mood lighting and consume much less energy as compared to CFL bulbs. Easy on the environment, they are eco-friendly and have no harmful chemicals.



Details	SSK-SMW-7W-C	SSK-SMW-8W-C	SSK-SMW-9W-C	SSK-SMW-9W-5C	SSK-SMW-12W-5C
Input Power	7W	8W	9W	9W	12W
Holder Base	B22/E27				
Size (mm)	Ø60 x 116 (H)				Ø65 x 130 (H)
Input Voltage	AC 90-300V, 50Hz				
Colour Temperature	RGB+White 6500K		RGB+Warm white+White		
Beam Angle	>140°				
Lumens	>560lm	>720lm	>820lm	>850lm	>1200lm
Ingress Protection	IP20				
Operating Temperature Range	-10°C ~ 50°C				
Power Factor	>0.9				
Housing	Aluminium + Thermoplastic				



Good colour rendering



RGB Light



Set a Schedule or Timer



Energy saving and lower power consumption



Group Devices



Wireless



App Control



BULB - EMB









Say goodbye to power outages with the Syska Re-energize emergency bulb.

The bulb automatically lights up when there is a power cut.

It functions with the help of a rechargeable and replaceable battery.

Details	SSK-EMB-0901	SSK-EMB-0902-9W-D	SSK-EMB-0903	SSK-EMB-1201
Input Power	9W			12W
Holder Base	B22/E27			
Size (mm)	Ø70 x 143 (H)	Ø80 x 168 (H)	Ø70 x 143 (H)	Ø80 x 143 (H)
Input Voltage Range	AC 90-300V, 50Hz			
Colour Temperature	6500K/4000K/3000K			
Operating Temperature Range	-10°C ~ 50°C			
CRI	>75			
Beam Angle	>180°			
Lumens	>900lm			>1200lm
Battery Type	Lithium Ion			
Battery Capacity	2200mAh			
Charging Time	8-10 hrs		6-8 hrs	8-10 hrs
Backup Time/ Emergency Time	Up to 4 hrs			
Lumens@Emergency	>320lm		Mode 1: >350lm Mode 2: >200lm Mode 3: >150lm	>350lm
Ingress Protection	IP20			
Power Factor	>0.9			
Housing	Aluminium + Thermoplastic			



-  Elliptical lens gives wide spread of light to cover maximum area
-  No UV radiation
-  Rechargeable battery
-  Replaceable battery
-  B22/E27 Base
-  Eco-friendly
-  Emergency use
-  Long lifespan (Up to 25,000 hrs)

FAN BULB



The Syska Fan Bulb is an innovative bulb shaped like a fan. Its foldable design lets you adjust the spread of the light, so you can get a wider spread as well as a concentrated ray of light according to your lighting needs. It's eco-friendly and consumes less power.

Details	SSK-FAB-4001
Input Power	40W
Holder Base	B22/E27
Size (mm)	Ø73x235 (H) (Closed)
Input Voltage Range	AC 90-300V, 50 Hz
Colour Temperature	6500K/4000K/3000K
CRI	>75
Beam Angle	>180°
Lumens	>4000lm
Ingress Protection	IP20
Operating Temperature Range	-10°C ~ 50°C
Power Factor	>0.9
Housing	Aluminium + Thermoplastic

- Foldable design
- Fan shaped bulb
- No UV radiation
- Wide operating voltage
- B22/E27 Base
- Patented model
- Flap movement up to 90° per flap
- Light output >180°
- Eco-friendly
- Energy saving and lower power consumption



BULB - TLL



The Lumispread is a revolutionary LED bulb that fits into a regular bulb socket and has the power to emit a widespread beam of light like that of a tube light. The swivel head lets you adjust the light in the direction you want.

Details	SSK-TLL-10W	SSK-TLL-12W	SSK-TLL-30W
Input Power	10W	12W	30W
Holder Base	B22/E27		
Size (mm)	210 x 24 x 105 (H)		300 x 50 x 115 (H)
Input Voltage Range	AC 90-300V, 50Hz		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>180°		
Lumens	>1050lm	>1260lm	>2100lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Power Factor	>0.9		
Housing	Thermoplastic + PC		

- Energy saving and lower power consumption
- No UV radiation
- B22/E27 Base
- Swivel body action
- Eco-friendly
- Unidirectional



BULB - TLL EMERGENCY

Don't let sudden power outages keep you in the dark. The Syska TLL Emergency Bulb has a great power backup to ensure your space is always bright.

Details	SSK-TLL-10W-EM
Input Power	10W
Holder Base	B22
Size (mm)	210 x 25 x 105 (H)
Input Voltage Range	AC 90-300V, 50HZ
Colour Temperature	6500K
CRI	>75
Beam Angle	>180°
Lumens	>1000lm
Charging Time	8-10 hrs
Emergency Time	3.5 hrs
Ingress Protection	IP20
Operating Temperature Range	-10°C ~ 50°C
Power Factor	>0.9
Housing	Thermoplastic



Energy saving and lower power consumption



LED Bulb



B22/E27 Base



Surge Protection 4KV



Eco-friendly



Wider Light Spread



Rechargeable battery



LED MOTION SENSOR BULB

A smart bulb in the truest sense of the word, this LED Motion Sensor Bulb saves power by turning ON or OFF based on its motion sensing technology.

Details	SSK-PA-S-9W
Input Power	9W
Holder Base	B22
Size (mm)	Ø 60 x 116 (H)
Input Voltage Range	AC 90-300V, 50Hz
Colour Temperature	6500K/4000K/3000K
CRI	>75
Beam Angle	120°
Lumens	>900lm
Ingress Protection	IP20
Operating Temperature Range	-10°C ~ 50°C
Power Factor	>0.9
Housing	Thermoplastic + Aluminium
Detection Range	5 Meters
Delay Time	60 Sec



Energy saving and lower power consumption



No UV radiation



For Indoor Use



Motion Sensor



LED BATTENS & TUBES

The CFL fluorescent tube light is a thing of the past. Bask in the light of Syska LED battens and tubes to save on power consumption and experience maximum illumination.



LED T5 TUBE LIGHTS



Let your home be the brightest one in the neighbourhood with the Syska LED T5 Batten. Its lumens brighten up every space. It's an eco-friendly batten that does no harm to the environment. What's more? You can save up to 70% energy.

Details	SSK-SQ-0401-4W	SSK-SQ-0801-8W	SSK-SQ-1201-12W-PC	SSK-SQ-2001-20W	SSK-SQ-2201-22W-PC	SSK-SQ-2401-24W-PC
Input Power	4W	8W	12W	20W	22W	24W
Size (mm)	290x21.8x35 (H)	598x22x37 (H)		1180x22x37 (H)		
Input Voltage Range	AC 90-300V, 50Hz					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
Beam Angle	>120°					
Lumens	>400lm	>800lm	>1200lm	>2000lm	>2200lm	>2400lm
Power Factor	>0.9					
Ingress Protection	IP20					
Operating Temperature	-10°C ~ 50°C					
Housing	Thermoplastic					



Energy saving and lower power consumption



No UV radiation



Surface mounted batten



Wide operating voltage



Eco-friendly



LED T5 HIGH LUMEN TUBE LIGHTS



Dispel the darkness with this super bright surface mounted batten. It's eco-friendly, energy efficient and comes with a wide operating voltage.

Details	SSK-SQ-2501-25W-PC-6500K	SSK-SQ-3001-30W-PC-6500K
Input Power	25W	30W
Size (mm)	1182x23x37 (H)	
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K/4000K/3000K	
CRI	>75	
Beam Angle	120°	
Lumens	>3000lm	>3600lm
Power Factor	>0.9	
Ingress Protection	IP20	
Operating Temperature	-10°C ~ 50°C	
Housing	Aluminium Powder Coated + Thermoplastic with Diffuser	



Energy saving and lower power consumption



No UV radiation



Surface mounted batten



Wide operating voltage



Eco-friendly



LED SLIM T5 TUBE LIGHTS

Light up your home and office space with max brightness using the T5 Maxglow Batten. Its lumens offer brightness which can lighten up your space unlike any other product.

Details	SSK-SQ-1801-18W-MG	SSK-SQ2001-20W-SLM
Input Power	18W	20W
Size (mm)	1100 x 23 x 37.4 (H)	1100 x 23.8 x 33 (H)
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K/4000K/3000K	
CRI	>75	
Beam Angle	120°	
Lumens	>1800lm	>2000lm
Power Factor	>0.9	
Ingress Protection	IP20	
Operating Temperature	-10°C ~ 50°C	
Housing	Thermoplastic	



Energy saving and lower power consumption



No UV radiation



Surface mounted batten



Wide operating voltage



Eco-friendly



LED T5 ALUMINIUM TUBE LIGHTS

Let your home be the brightest one in the neighbourhood with the Syska LED T5 Batten. Its lumens brighten up every space. It's an eco-friendly batten that does no harm to the environment. What's more? You can save up to 70% energy.

Details	SSK-SQ-2401-24W-AL-N	SSK-SQ-2801-28W-AL-N
Input Power	24W	28W
Size (mm)	1135x22x37 (H)	
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K/4000K/3000K	
CRI	>75	
Beam Angle	120°	
Lumens	>2640lm	>3080lm
Power Factor	>0.9	
Ingress Protection	IP20	
Operating Temperature	-10°C ~ 50°C	
Housing	Aluminium Powder coated + Thermoplastic with Diffuser	



Energy saving and lower power consumption



No UV radiation



Surface mounted batten



Wide operating voltage



Eco-friendly



LED 3-IN-1 T5 BATTEN

White, off white and warm yellow, with the Syska T5 3-in-1 Batten you can choose from these cool shades of light. Simply switch it on and off to change the colour of the light.

Details	SSK-SQ2201-3 IN 1
Input Power	22W
Size (mm)	1180x22x37 (H)
Input Voltage Range	AC 90-300V, 50Hz
Colour Temperature	6500K/4000K/3000K
CRI	>75
Beam Angle	120°
Lumens	>1800~>2100lm
Power Factor	>0.9
Ingress Protection	IP20
Operating Temperature	-10°C ~ 50°C
Housing	Thermoplastic



Energy saving and lower power consumption



Wide operating voltage




No UV radiation



TriColour CCT (3000~4000~6500K)



Eco-friendly

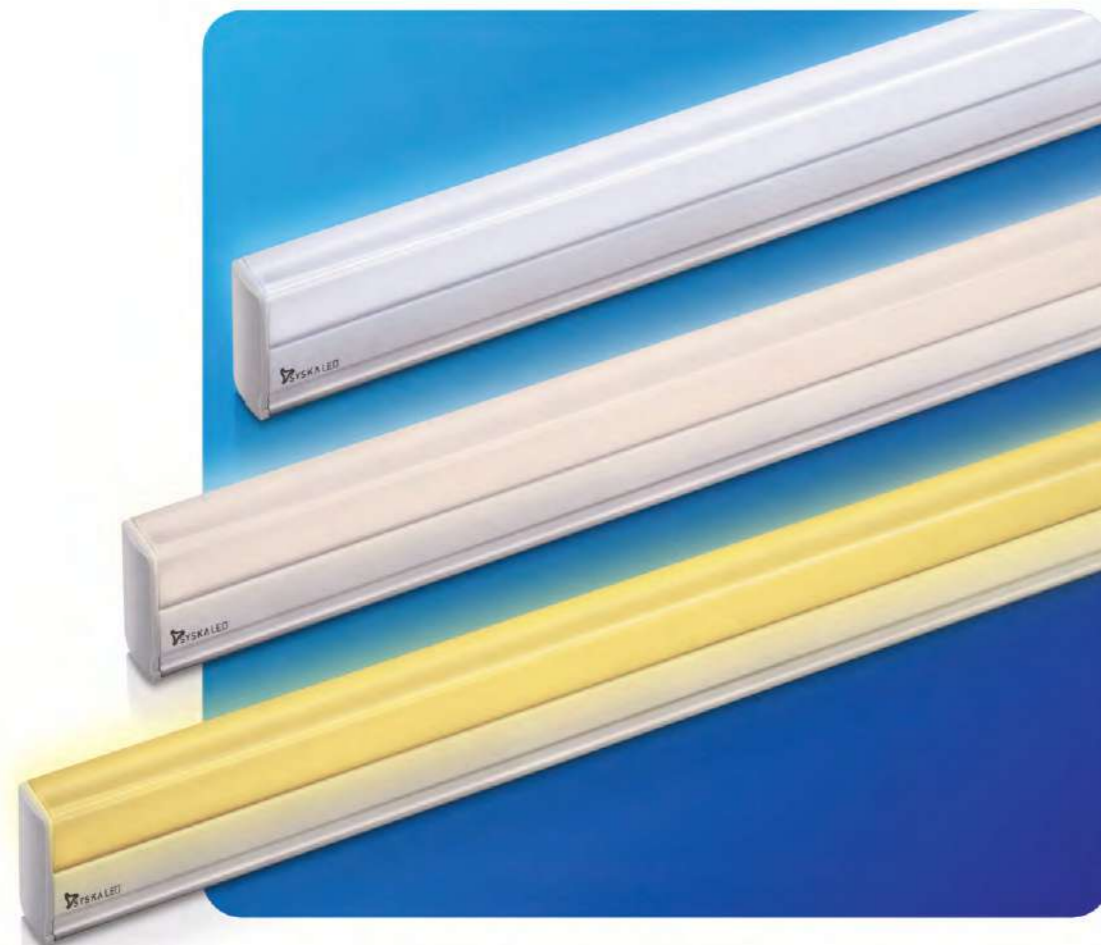

LED T8 BATTENS

Illuminate your home with the sleek and stylish LED Batten. Its strong aluminium body helps to maintain the thermal efficiency for a longer lifespan. What's more? You can save up to 70% energy with a light that will always be light on your pocket.

Details	SSK-HL-T8-20W	SSK-HL-T8-36W	SSK-HL-T8-40W
Input Power	20W	36W	40W
Size (mm)	580 x 27 x 34.7 (H)	1188 x 27 x 35 (H)	
Input Voltage Range	AC 90-300V, 50Hz		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>2000lm	>4000lm	>4500lm
Power Factor	>0.9		
Ingress Protection	IP20		
Operating Temperature	-10°C ~ 50°		
Housing	Aluminium Powder Coated + Thermoplastic with Diffuser		



Energy saving and lower power consumption



No UV radiation



Surface mounted batten



Wide operating voltage



Eco-friendly



LED T8 RETROFIT TUBES

The T8 Retrofit Tube has a slim design, and comes with lightweight, strong plastic fixtures.

Details	SSK-TL-18W-I	SSK-TL-22W-I	SSK-TL-18W-I-HD	SSK-TL-22W-I-HD	SSK-TL-18W-I-HD-DE
Input Power	18W	22W	18W	22W	18W
Size (mm)	1230x32x32 (H)				
Base	G13				
Input Voltage Range	AC 90-300V, 50Hz				
Colour Temperature	6500K/4000K/3000K				
CRI	>75				
Beam Angle	>180°				
Lumens	>1800lm	>2200lm	>2160lm	>2640lm	>2160lm
Power Factor	>0.9				
Ingress Protection	IP20				
Operating Temperature	-10°C ~ 50°				
Housing	Polycarbonate				



Energy saving and lower power consumption



No UV radiation



Surface mounted batten



Wide operating voltage



Eco-friendly



T8 LED TUBE LIGHT FIXTURES

These are specially designed fixtures for Syska T8 Tubelights. The fixtures are light in weight, powder coated and come with detachable cap ends.

Details	SSK-T8F-1201	SSK-T8F-1202	SSK-T8P-1201	SSK-T8P-1202
Size (mm)	1260x75x65 (H)	1260x115x65 (H)	1220x35x35 (H)	1220x70x35 (H)
Input Voltage Range	AC 90-300V, 50Hz			
Beam Angle	>120°			
Ingress Protection	IP65		IP20	
Operating Temperature	-10°C ~ 50°C			
Suitable for	1xT8 (4')	2xT8 (4')	1xT8 (4')	2xT8 (4')
Housing	Thermoplastic		CRCA	

-  Retrofit tubelight fixture
-  Eco-friendly
-  Energy saving and lower power consumption



LED PLL LAMPS - RETROFIT

These lamps come with a retrofit base which makes them compliant with your existing lamp holder. They also offer a longer life cycle, high energy efficiency and high lumens.

Details	SSK-PLL-18W-N
Input Power	18W
Size (mm)	410x46x27 (H)
Input Voltage Range	AC 90-300V, 50Hz
Colour Temperature	6500K/4000K/3000K
CRI	>75
Beam Angle	>120°
Lumens	>1800lm
Power Factor	>0.9
Ingress Protection	IP20
Operating Temperature	-10°C ~ 50°C
Housing	Thermo-plastic

-  No UV radiation
-  Eco-friendly
-  Energy saving and lower power consumption
-  Wide operating voltage
-  Use G24/2G11 base
-  Retrofit replacement



LED SPOT LIGHTS

Everyone loves the spotlight and you can enjoy it right at home with SYSKA LED Spot Lights. These are light in weight, easy to install and last longer than traditional halogen lamps.



LED CABINET LIGHT - MCL

These cabinet lights are here to accentuate the beauty of showcases and wardrobes. They have a wide operating voltage and emit light that's at a narrow beam angle.



Details	SSK-MCL-2W-C	SSK-MCL-2W-F	SSK-MCL-2W-S-C	SSK-MCL-2W-S-F	SSK-MCL-2W-N-RF	SSK-MCL-2W-N-RC
Input Power	2W					
Size (mm)	Ø42 x 13 (H)					
Cutout Size (mm)	φ32					
Input Voltage Range	AC 90-300V, 50Hz					
Colour Temperature	6500K/3000K/Red/Green/Blue/Pink					
CRI	>75					
Beam Angle	>45°					
Lumens	>140lm					
Ingress Protection	IP20					
Operating Temperature Range	-10°C ~ +50°C					
Housing	Thermoplastic					



Energy saving and lower power consumption



No UV radiation



Recessed COB downlight



Wide operating voltage



Narrow beam angle



Eco-friendly



LED SURFACE CABINET LIGHT

The LED Surface Cabinet Light is perfect for home or office spaces and is compact, lightweight and saves power efficiently.



Details	SSK-STR-0501
Input Power	5W
Size (mm)	Ø 61 x 16 (H)
Input Voltage Range	AC 90-300V, 50Hz
Colour Temperature	6500K/4000K/3000K
CRI	>75
Beam Angle	>160°
Lumens	>500lm
Ingress Protection	IP20
Operating Temperature Range	-10°C ~ 50°C
Housing	Thermoplastic + Metal Clamp



Good colour rendering



No UV radiation



Eco-friendly



Lightweight



LED DOWN LIGHTS

These elegantly designed down lights look great on your ceiling and their superior quality and lighting capabilities are sure to set the mood in your home or office space.



LED DOWNLIGHT LIGHT-CLP

The Recessed LED Downlight brightens and spruces up your space while consuming minimal power, giving you the most out of your lighting.



Details	SSK-CLP-3W
Input Power	3W
Size (mm)	Ø 43 x 25 (H)
Cutout Size (mm)	φ25
Input Voltage Range	AC 90-300V, 50Hz
Colour Temperature	3000K/6500K/Red/Green/Blue/Pink
CRI	>75
Beam Angle	>60°
Lumens	>210lm
Ingress Protection	IP20
Operating Temperature Range	-10°C ~ 50°C
Housing	Thermoplastic + Metal Clamp



Energy saving and lower power consumption



No UV radiation



Recessed downlight



Wide operating voltage



Suitable for junction box fixing



Eco-friendly



LED DOWNLIGHT-PAD (SMD)

Live up your home and office space with these recessed Syska LED Downlights that fit seamlessly into the ceiling and consume very little power. The finish and design adds a sense of style and elegance to the interior.



Details	SSK-PAD-0502 (SMD)-5W
Input Power	5W
Size (mm)	Ø112X50 (H)
Cutout Size (mm)	φ80mm
Input Voltage Range	AC 90-300V, 50Hz
Colour Temperature	6500K/4000K/3000K/RED/GREEN/BLUE/PINK
CRI	>75
Beam Angle	>120°
Lumens	>400lm
Ingress Protection	IP20
Power Factor	>0.9
Operating Temperature Range	-10°C ~ 50°C
Housing	Thermoplastic with PC Milky Diffuser



Energy saving and lower power consumption



No UV radiation



Recessed downlight



Wide operating voltage



Suitable for junction box fixing



Eco-friendly









LED DOWNLIGHT-PAD (SMD)



Liven up your home and office space with these recessed Syska LED Downlights that fit seamlessly into the ceiling and consume very little power. The finish and design adds a sense of style and elegance to the interior.

Details	SSK-PAD-0702 (SMD)-7W	SSK-PAD-0902 (SMD)-9W
Input Power	7W	9W
Size (mm)	Ø112X50 (H)	
Cutout Size (mm)	Ø80mm	
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K/3000K	
CRI	>75	
Beam Angle	>120°	
Lumens	>560lm	>720lm
Ingress Protection	IP20	
Power Factor	>0.9	
Operating Temperature Range	-10°C ~ 50°C	
Housing	Thermoplastic with PC Milky Diffuser	

-  Energy saving and lower power consumption
-  No UV radiation
-  Recessed downlight
-  Wide operating voltage
-  Suitable for junction box fixing
-  Eco-friendly








LED DOWNLIGHT-MPD



Interiors look stunning under the light from these Downlights. They come with a wide operating voltage and are consume less power.

Details	SSK-MPD-3W
Input Power	3W
Size (mm)	Ø80X32 (H)
Cutout Size (mm)	Ø55mm
Input Voltage Range	AC 90-300V, 50Hz
Colour Temperature	6500K/4000K/3000K/RED/GREEN/BLUE/PINK
CRI	>75
Beam Angle	>120°
Lumens	>180lm
Ingress Protection	IP20
Power Factor	>0.9
Operating Temperature Range	-10°C ~ 50°C
Housing	Thermoplastic with Milky PC Cover

-  Energy saving and lower power consumption
-  No UV radiation
-  Recessed downlight
-  Wide operating voltage
-  Eco-friendly



LED DOWNLIGHT-PRD (SMD)

Switch to these recessed LED downlights to liven up your home and office spaces like never before. They are easy to install, slim in design and help you save up to 70% energy.



Details	SSK-PRD-0502 (SMD)-5W	SSK-PRD-0702 (SMD)-7W
Input Power	5W	7W
Size (mm)	Ø85X55 (H)	
Cutout Size (mm)	φ45mm	
Input Voltage Range	AC 90-300V, 50Hz	
Colour temperature	6500K/4000K/3000K/BLUE/RED/GREEN	
CRI	>75	
Beam Angle	>120°	
Lumens	>475lm	>630lm
Ingress Protection	IP20	
Power Factor	>0.9	
Operating Temperature Range	-10°C ~ 50°C	
Housing	Thermoplastic with PC Milky Diffuser	



Eco-friendly



Energy saving and lower power consumption



Long lifespan (Up to 25,000 hrs)



No UV radiation



LED DOWNLIGHT-PRD (SMD)

Switch to these recessed LED downlights to liven up your home and office spaces like never before. They are easy to install, slim in design and help you save up to 70% energy.



Details	SSK-PRD-0902 (SMD)-9W	SSK-PRD-1202 (SMD)-12W	SSK-PRD-1502 (SMD)-15W
Input Power	9W	12W	15W
Size (mm)	Ø85X55 (H)	Ø140x60 (H)	
Cutout Size (mm)	φ45mm		
Input Voltage Range	AC 90-300V, 50Hz		
Colour temperature	6500K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>765lm	>1020lm	>1275lm
Ingress Protection	IP20		
Power Factor	>0.9		
Operating Temperature Range	-10°C ~ 50°C		
Housing	Thermoplastic with PC Milky Diffuser		



Eco-friendly



Energy saving and lower power consumption



Long lifespan (Up to 25,000 hrs)



No UV radiation









LED COB DOWNLIGHT-SLC SERIES



The very sleek and elegantly designed Syska COB Downlights are housed in a die-cast aluminum body. They are easy to install and are highly energy efficient.

Details	SSK-SLC-3W	SSK-SLC-6W	SSK-SLC-9W	SSK-SLC-12W	SSK-SLC-15W	SSK-SLC-18W
Input Power	3W	6W	9W	12W	15W	18W
Size (mm)	Ø80X20 (H)	Ø90X22 (H)	Ø95X22 (H)	Ø95X22 (H)	Ø110X22 (H)	Ø120X23.5 (H)
Cutout Size (mm)	φ62mm	φ72mm	φ77mm	φ77mm	φ96mm	φ106mm
Input Voltage Range	AC 90-300V, 50Hz					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
Beam Angle	>36°					
Lumens	>285lm	>570lm	>855lm	>1140lm	>1425lm	>1710lm
Ingress Protection	IP20					
Power Factor	>0.9					
Operating Temperature Range	-10°C ~ 50°C					
Housing	Die-cast Aluminium					

-  Narrow beam angle
-  Eco-friendly
-  Long lifespan (Up to 25,000 hrs)
-  Energy saving and lower power consumption
-  Swivel orientation 60°
-  Elliptical lens gives wide spread of light to cover maximum area
-  No UV radiation










LED SMD COB DOWNLIGHT-SLP SERIES



Grabbing the spotlight are these downlights that have a narrow beam angle with a wide operating voltage. They are eco-friendly and energy-efficient.

Details	SSK-SLP-3W	SSK-SLP-6W	SSK-SLP-9W	SSK-SLP-12W	SSK-SLP-15W
Input Power	3W	6W	9W	12W	15W
Size (mm)	Ø75X42 (H)	Ø95X42 (H)	Ø116 X 52 (H)	Ø140 X 52 (H)	Ø140 X 55 (H)
Cutout Size (mm)	φ57mm	φ70mm	φ90mm	φ115mm	φ115mm
Input Voltage Range	AC 90-300V, 50Hz				
Colour Temperature	6500K/4000K/3000K				
CRI	>75				
Beam Angle	45°				70°
Lumens	>210lm	>420lm	>630lm	>840lm	>1050lm
Ingress Protection	IP20				
Power Factor	>0.9				
Operating Temperature Range	-10°C ~ 50°C				
Housing	Thermoplastic with PC Clear Diffuser				

-  Energy saving and lower power consumption
-  No UV radiation
-  Recessed COB downlight
-  Eco-friendly
-  Wide operating voltage
-  Swivel orientation 60°
-  Narrow beam angle



DOWNLIGHT-DLE-COB



Lighting up homes like never before are these downlights that are super bright, energy-efficient, sleek, and easy to install.

Details	SSK-DLE-COB-3W	SSK-DLE-COB-6W	SSK-DLE-COB-9W	SSK-DLE-COB-12W	SSK-DLE-COB-16W	SSK-DLE-COB-24W	SSK-DLE-COB-30W
Input Power	3W	6W	9W	12W	16W	24W	30W
Size (mm)	Ø66X30 (H)	Ø80X40 (H)	Ø90X50 (H)	Ø98 x 55 (H)	Ø110X65 (H)	Ø145X84 (H)	Ø145X84 (H)
Cutout Size (mm)	φ55mm	φ65mm	φ75mm	φ85mm	φ90mm	φ135mm	φ135mm
Input Voltage Range	AC 90-300V, 50Hz						
Colour Temperature	6500K/4000K/3000K						
CRI	>75						
Beam Angle	38°						
Swivel Angle	45°						
Lumens	>210lm	>420lm	>720lm	>960lm	>1280lm	>1920lm	>2400lm
Ingress Protection	IP20						
Power Factor	>0.9						
Operating Temperature Range	-10°C ~ 50°C						
Housing	Pressure Die-cast Aluminium with Clear PC Cover						
Fixture	Swivel						

- Energy saving and lower power consumption
- No UV radiation
- Recessed COB downlight
- Eco-friendly
- Wide operating voltage
- Swivel orientation 60°
- Narrow beam angle



LED RECESSED DUAL COLOUR DOWNLIGHTS



Here's an LED downlight that can emit 2 different colours to light up your home! It's energy-efficient, lightweight, and easy to install!

Details	SSK-ORN-R-6W	SSK-ORN-R-12W
Input Power	6W+6W	12W+12W
Size (mm)	Ø88 X 42 (H)	Ø115x45 (H)
Cutout Size (mm)	φ48mm	
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K+3000K, 6500K+Red, 6500K+Green, 6500K+Blue, 6500K+Pink	
CRI	>75	
Beam Angle	>120°	
Lumens	>600lm	>1200lm
Ingress Protection	IP20	
Power Factor	>0.9	
Operating Temperature Range	-10°C ~ 50°C	
Housing	Thermoplastic with PC Milky Diffuser	

- Energy saving and lower power consumption
- No UV radiation
- Recessed COB downlight
- Wide operating voltage
- Narrow beam angle
- Eco-friendly



LED RECESSED PANEL LIGHTS

Panel Lights add a touch of elegance on the ceiling of your home or office. They are of a superior quality and easy to install.



RECESSED LED PANEL LIGHT-RDL SERIES (ROUND)



Now you can light up your home and office spaces with these round downlights that are easy to install and help you see those spaces in a new light. Its thin trim provides a wide dispersion of light.

Details	SSK-RDL-R-5W	SSK-RDL-R-8W	SSK-RDL-R-10W	SSK-RDL-R-12W	SSK-RDL-R-15W	SSK-RDL-R-20W
Input Power	5W	8W	10W	12W	15W	20W
Size (mm)	Ø82 x 36 (H)	Ø116 x 36 (H)	Ø160 x 36 (H)	Ø166 x 36 (H)		Ø220 x 36 (H)
Cut Out (mm)	φ68	φ105	φ132	φ155		φ210
Input Voltage Range	AC 90-300V, 50Hz					
Power Factor	>0.9					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
Beam Angle	>120°					
Lumens	>500lm	>800lm	>1000lm	>1200lm	>1500lm	>2000lm
Ingress Protection	IP20					
Operating Temperature Range	-10°C ~ 50°C					
Housing	Thermoplastic + PC					

RDL PANEL RING (ROUND)

Details	SSK-SR-RDL-8-R	SSK-SR-RDL-1215-R	SSK-SR-RDL-20-R
Input Power	8W	12W-15W	20W
Size (mm)	Ø 117x37(H)	Ø166x37(H)	Ø220x37(H)



Energy saving and lower power consumption



No UV radiation



Eco-friendly



Recessed round panel



Wide operating voltage



RECESSED LED PANEL LIGHT-RDL SERIES (SQUARE)



Now you can light up your home and office spaces with these round downlights that are easy to install and help you see those spaces in a new light. Its thin trim provides a wide dispersion of light.

Details	SSK-RDL-S-5W	SSK-RDL-S-8W	SSK-RDL-S-10W	SSK-RDL-S-12W	SSK-RDL-S-15W	SSK-RDL-S-20W
Input Power	5W	8W	10W	12W	15W	20W
Size (mm)	82x82x36 (H)	116x116x36 (H)	160x160x36 (H)	166x166x36 (H)		220x220x36 (H)
Cut Out (mm)	φ68 x φ68	φ105 x φ105	φ132 x φ132	φ155 x φ155		φ210 x φ210
Input Voltage Range	AC 90-300V, 50Hz					
Power Factor	>0.9					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
Beam Angle	>120°					
Lumens	>500lm	>800lm	>1000lm	>1200lm	>1500lm	>2000lm
Ingress Protection	IP20					
Operating Temperature Range	-10°C ~ 50°C					
Housing	Thermoplastic + PC					

RDL PANEL RING (SQUARE)

Details	SSK-SR-RDL-8-S	SSK-SR-RDL-1215-S	SSK-SR-RDL-20-S
Input Power	8W	12W-15W	20W
Size (mm)	117x117x37(H)	166x166x37(H)	220x220x37(H)



Energy saving and lower power consumption



Recessed square panel



Wide operating voltage



No UV radiation




Eco-friendly



RECESSED LED PANEL LIGHT-RDL TRIOLITE SERIES (ROUND)

Now light up your home or work space with 3 different shades. Syska LED 3-in-1 Round Downlights are aesthetically pleasing and help you save more.


Details	SSK-RDL-3 IN 1-R-8W	SSK-RDL-3 IN 1-R-12W	SSK-RDL-3 IN 1-R-15W	SSK-RDL-3 IN 1-R-20W
Input Power	8W	12W	15W	20W
Size (mm)	Ø116 x 36 (H)	Ø166 x 36 (H)		Ø220 x 36 (H)
Cut Out (mm)	φ105	φ155		φ210
Input Voltage Range	AC 90-300V, 50Hz			
Power Factor	>0.9			
Colour Temperature	6500K-4000K-3000K			
CRI	>75			
Beam Angle	>120°			
Lumens	>600-800lm	>950-1200lm	>1200-1500lm	>1600-2000lm
Ingress Protection	IP20			
Operating Temperature Range	-10°C ~ 50°C			
Housing	Thermoplastic + PC			

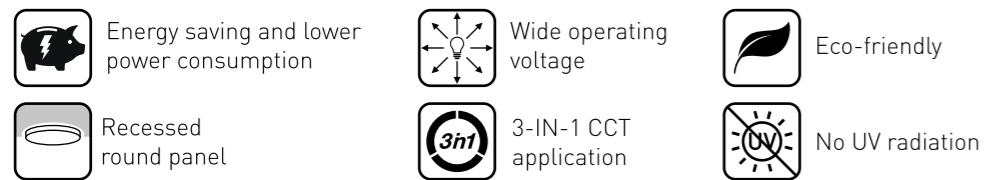

RECESSED LED PANEL LIGHT-RDL TRIOLITE SERIES (SQUARE)

Now light up your home or work space with 3 different shades. Syska LED 3-in-1 Square Downlights are aesthetically pleasing and help you save more.

Details	SSK-RDL-3 IN 1-S-8W	SSK-RDL-3 IN 1-S-12W	SSK-RDL-3 IN 1-S-15W	SSK-RDL-3 IN 1-S-20W
Input Power	8W	12W	15W	20W
Size (mm)	116 x 116 x 36 (H)	166 x 166 x 36 (H)		220 x 220 x 36 (H)
Cut Out (mm)	φ105 x φ105	φ155 x φ155		φ210 x φ210
Input Voltage Range	AC 90-300V, 50Hz			
Power Factor	>0.9			
Colour Temperature	6500K-4000K-3000K			
CRI	>75			
Beam Angle	>120°			
Lumens	>600-800lm	>950-1200lm	>1200-1500lm	>1600-2000lm
Ingress Protection	IP20			
Operating Temperature Range	-10°C ~ 50°C			
Housing	Thermoplastic + PC			

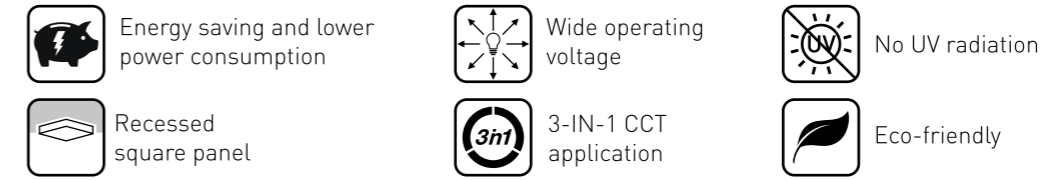






RECESSED LED PANEL LIGHT-RDL PREMIUM SERIES (ROUND)

Make room for this stunningly bright and super sleek panel light from Syska. The LED helps you save power, is easy to install and super bright.



Details	SSK-RDL-P-R-10W	SSK-RDL-P-R-15W	SSK-RDL-P-R-20W	SSK-RDL-P-R-25W
Input Power	10W	15W	20W	25W
Size (mm)	Ø115 x 30 (H)	Ø140 x 30 (H)	Ø160 x 30 (H)	Ø215 x 32 (H)
Cut Out (mm)	φ100	φ125	φ150	φ195
Input Voltage Range	AC 90-300V, 50Hz			
Power Factor	>0.9			
Colour Temperature	6500K/4000K/3000K			
CRI	>75			
Beam Angle	>120°			
Lumens	>1000lm	>1500lm	>2000lm	>2500lm
Ingress Protection	IP20			
Operating Temperature Range	-10°C ~ 50°C			
Housing	Thermoplastic + PC			

-  Energy saving and lower power consumption
-  Wide operating voltage
-  Eco-friendly
-  Recessed round panel
-  No UV radiation








RECESSED LED PANEL LIGHT-RDL PREMIUM SERIES (SQUARE)

Make room for this stunningly bright and super sleek panel light from Syska. The LED helps you save power, is easy to install and super bright.



Details	SSK-RDL-P-S-10W	SSK-RDL-P-S-15W	SSK-RDL-P-S-20W	SSK-RDL-P-S-25W
Input Power	10W	15W	20W	25W
Size (mm)	115x115x30 (H)	140x140x30 (H)	160x160x30 (H)	215x215x32 (H)
Cut Out (mm)	φ100 x φ100	φ125 x φ125	φ150 x φ150	φ195 x φ195
Input Voltage Range	AC 90-300V, 50Hz			
Power Factor	>0.9			
Colour Temperature	6500K/4000K/3000K			
CRI	>75			
Beam Angle	>120°			
Lumens	>1000lm	>1500lm	>2000lm	>2500lm
Ingress Protection	IP20			
Operating Temperature Range	-10°C ~ 50°C			
Housing	Thermoplastic + PC			

-  Energy saving and lower power consumption
-  Wide operating voltage
-  No UV radiation
-  Recessed square panel
-  Eco-friendly




RDL SLIM iLED (ROUND)

Sleek, eco-friendly and super efficient, the round RDL Slim iLED is a bright light and convenient to install.



Details	SSK-RDL-R-6W-iLED	SSK-RDL-R-12W-iLED	SSK-RDL-R-18W-iLED
Input Power	6W	12W	18W
Size (mm)	Ø 95 x 29 (H)	Ø 128 x 29 (H)	Ø 159 x 29 (H)
Cut Out (mm)	φ82	φ106	φ140
Input Voltage Range	AC 90-300V, 50Hz		
Power Factor	>0.9		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>480lm	>960lm	>1440lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Housing	Thermoplastic + PC		

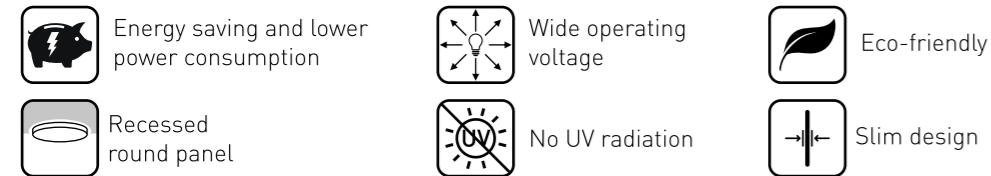


RDL SLIM iLED (SQUARE)

The square RDL Slim iLED saves power, is easy to install and fits seamlessly into spaces owing to its sleek design.



Details	SSK-RDL-S-6W-iLED	SSK-RDL-S-12W-iLED	SSK-RDL-S-18W-iLED
Input Power	6W	12W	18W
Size (mm)	95 x 95 x 29 (H)	128 x 128 x 29 (H)	159 x 159 x 29 (H)
Cut Out (mm)	φ82 x φ82	φ106 x φ106	φ140 x φ140
Input Voltage Range	AC 90-300V, 50Hz		
Power Factor	>0.9		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>480lm	>960lm	>1440lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Housing	Thermoplastic + PC		

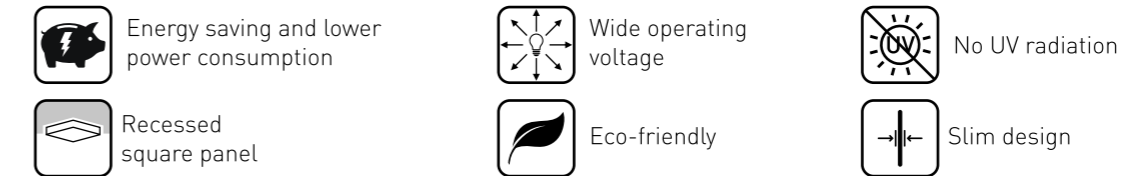

LED RECESSED PANEL LIGHT-ARIM SERIES (ROUND)



Get your home lighting right with this eco-friendly and easy-to-install panel light.
It's light in weight and super bright.

Details	SSK-ARIM-R-12W	SSK-ARIM-R-18W	SSK-ARIM-R-24W
Input Power	12W	18W	24W
Size (mm)	Ø 120 x 30 (H)	Ø170 x 32 (H)	Ø223 x 32 (H)
Cut Out (mm)	φ75- φ100	φ75-φ150	φ75-φ200
Input Voltage Range	AC 90-300V, 50Hz		
Power Factor	>0.9		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>1080lm	>1620lm	>2160lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Housing	Thermoplastic +Metal Clamp+ PC Diffuser		

- Energy saving and lower power consumption
- Wide operating voltage
- Eco-friendly
- Recessed round panel
- No UV radiation



LED RECESSED PANEL LIGHT-ARIM SERIES (SQUARE)



Get your home lighting right with this eco-friendly and easy-to-install panel light.
It's light in weight and super bright.

Details	SSK-ARIM-S-12W	SSK-ARIM-S-18W	SSK-ARIM-S-24W
Input Power	12W	18W	24W
Size (mm)	120 x 120 x 30 (H)	170 x 170 x 32 (H)	223 x 223 x 32 (H)
Cut Out (mm)	φ75-100 x φ75-100	φ75-150 x φ75-150	φ75-200 x φ75-200
Input Voltage Range	AC 90-300V, 50Hz		
Power Factor	>0.9		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>1080lm	>1620lm	>2160lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Housing	Thermoplastic +Metal Clamp+ PC Diffuser		

- Energy saving and lower power consumption
- Wide operating voltage
- No UV radiation
- Recessed square panel
- Eco-friendly



LED RECESSED PANEL LIGHT-RIM SERIES (ROUND)



Liven up your space with this panel light. It's lightweight, eco-friendly and easy to install.

Details	SSK-RIM-R-10W	SSK-RIM-R-15W	SSK-RIM-R-20W
Input Power	10W	15W	20W
Size (mm)	Ø 93 X 37 (H)	Ø 120 X 37 (H)	Ø 170 X 37 (H)
Cut Out (mm)	φ70	φ95	φ142
Input Voltage Range	AC 90-300V, 50Hz		
Power Factor	>0.9		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>1000lm	>1500lm	>2000lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Housing	Thermoplastic + Metal Clamp + PC Diffuser		



Energy saving and lower power consumption



Wide operating voltage



Eco-friendly



Recessed round panel



No UV radiation



LED RECESSED PANEL LIGHT-RIM SERIES (SQUARE)



Liven up your space with this panel light. It's lightweight, eco-friendly and easy to install.

Details	SSK-RIM-S-10W	SSK-RIM-S-15W	SSK-RIM-S-20W
Input Power	10W	15W	20W
Size (mm)	93 x 93 x 37 (H)	120 x 120 x 37 (H)	170 x 170 x 37 (H)
Cut Out (mm)	φ70 x φ70	φ95 x φ95	φ142 x φ142
Input Voltage Range	AC 90-300V, 50Hz		
Power Factor	>0.9		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>1000lm	>1500lm	>2000lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Housing	Thermoplastic + Metal Clamp + PC Diffuser		



Energy saving and lower power consumption



Wide operating voltage



No UV radiation



Recessed square panel



Eco-friendly



RECESSED LED PANEL LIGHT-PA SERIES (ROUND)



Making spaces brighter is this series of round panel lights.
The Elliptical lens gives a wide spread of light to cover maximum area.

Details	SSK-PA0801E-8W	SSK-PA1201E-12W	SSK-PA1501E-15W	SSK-PA2001E-20W	SSK-PA2401E-24W	SSK-PA3001E-30W
Input Power	8W	12W	15W	20W	24W	30W
Size (mm)	Ø120x18.7 (H)	Ø170x18.6 (H)		Ø225x19.5 (H)	Ø300x19.3 (H)	
Cut Out (mm)	φ105	φ155		φ205	φ285	
Input Voltage Range	AC 90-300V , 50Hz					
Power Factor	>0.9					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
Beam Angle	>120°					
Lumens	>600lm	>960lm	>1125lm	>1600lm	>1920lm	>2400lm
Ingress Protection	IP20					
Operating Temperature Range	-10°C ~ 50°C					
Housing	Pressure Die-cast Aluminium + PC					

- Recessed round panel
- Good colour rendering
- Long lifespan (Up to 25,000 hrs)
- No UV radiation
- Eco-friendly
- Elliptical lens gives wide spread of light to cover maximum area
- Energy saving and lower power consumption



RECESSED LED PANEL LIGHT-PA SERIES (SQUARE)



Making spaces brighter is this series of round panel lights.
The Elliptical lens gives a wide spread of light to cover maximum area.

Details	SSK-PA0801F-8W	SSK-PA1201F-12W	SSK-PA1501F-15W	SSK-PA2001F-20W	SSK-PA2401F-24W	SSK-PA3001F-30W
Input Power	8W	12W	15W	20W	24W	30W
Size (mm)	120x120x18.7 (H)	170x170x18.6 (H)		225x225x19.5 (H)	300x300x19.3 (H)	
Cut Out (mm)	φ105xφ105	φ155xφ155		φ205xφ205	φ285xφ285	
Input Voltage Range	AC 90-300V, 50Hz					
Power Factor	>0.9					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
Beam Angle	>120°					
Lumens	>600lm	>960lm	>1125lm	>1600lm	>1920lm	>2400lm
Ingress Protection	IP20					
Operating Temperature Range	-10°C ~ 50°C					
Housing	Pressure Die-cast Aluminium + PC					

- Recessed square panel
- No UV radiation
- Long lifespan (Up to 25,000 hrs)
- Eco-friendly
- Elliptical lens gives wide spread of light to cover maximum area
- Energy saving and lower power consumption



RECESSED LED PANEL LIGHT-PAF SERIES (ROUND)



Watch in wonder as this panel light livens up every space in your home.

Details	SSK-PAF-0503R-05W	SSK-PAF-0804R-08W	SSK-PAF-1005R-10W	SSK-PAF-1206R-12W	SSK-PAF-1506R-15W	SSK-PAF-1807R-18W	SSK-PAF-2008R-20W
Input Power	5W	8W	10W	12W	15W	18W	20W
Size (mm)	Ø82 x 20 (H)	Ø120 x 20 (H)	Ø152 x 20 (H)	Ø172 x 20 (H)		Ø190 x 20 (H)	Ø228 x 20 (H)
Cut Out (mm)	φ70	φ104	φ128	φ153		φ173	φ203
Input Voltage Range	AC 90-300V, 50Hz						
Power Factor	>0.9						
Colour Temperature	6500K/4000K/3000K						
CRI	>75						
Beam Angle	>120°						
Lumens	>350lm	>560lm	>800lm	>960lm	>1200lm	>1530lm	>1700lm
Ingress Protection	IP20						
Operating Temperature Range	-10°C ~ 50°C						
Housing	Pressure Die-cast Aluminium + PC						



Energy saving and lower power consumption



Wide operating voltage



No UV radiation



Recessed round panel



Eco-friendly



RECESSED LED PANEL LIGHT-PAF SERIES (SQUARE)



Watch in wonder as this panel light livens up every space in your home.

Details	SSK-PAF-0503S-05W	SSK-PAF-0804S-08W	SSK-PAF-1005S-10W	SSK-PAF-1206S-12W	SSK-PAF-1506S-15W	SSK-PAF-1807S-18W	SSK-PAF-2008S-20W
Input Power	5W	8W	10W	12W	15W	18W	20W
Size (mm)	82x82x20 (H)	120x120x20 (H)	152x152x20 (H)	172x172x20 (H)		190x190x20 (H)	228x228x20 (H)
Cut Out (mm)	φ70xφ70	φ104xφ104	φ128xφ128	φ153xφ153		φ173x173	φ203 x φ203
Input Voltage Range	AC 90-300V, 50Hz						
Power Factor	>0.9						
Colour Temperature	6500K/4000K/3000K						
CRI	>75						
Beam Angle	>120°						
Lumens	>350lm	>560lm	>800lm	>960lm	>1200lm	>1530lm	>1700lm
Ingress Protection	IP20						
Operating Temperature Range	-10°C ~ 50°C						
Housing	Pressure Die-cast Aluminium + PC						



Energy saving and lower power consumption



Wide operating voltage



No UV radiation



Recessed square panel



Eco-friendly



LED RECESSED PANEL LIGHT-PAP SERIES (ROUND)



Amp up the lighting of a room with this panel light. It's lightweight, eco-friendly and easy to install.

Details	SSK-PAP-R-3W	SSK-PAP-R-6W	SSK-PAP-R-12W	SSK-PAP-R-15W	SSK-PAP-R-20W
Input Power	3W	6W	12W	15W	20W
Size (mm)	Ø 82 x 24 (H)	Ø 120 x 24 (H)	Ø 170 x 24 (H)		Ø 220 x 24 (H)
Cut Out (mm)	φ66	φ105	φ155		φ205
Input Voltage Range	AC 90-300V, 50Hz				
Power Factor	>0.9				
Colour temperature	6500K/4000K/3000K				
CRI	>75				
Beam Angle	>120°				
Lumens	>210lm	>420lm	>840lm	>1125lm	>1500lm
Ingress Protection	IP20				
Operating Temperature Range	-10°C ~ 50°C				
Housing	Thermoplastic + PC Diffuser				



Energy saving and lower power consumption



Wide operating voltage



No UV radiation



Recessed round panel



Eco-friendly



LED RECESSED PANEL LIGHT-PAP SERIES (SQUARE)



Amp up the lighting of a room with this panel light. It's lightweight, eco-friendly and easy to install.

Details	SSK-PAP-S-3W	SSK-PAP-S-6W	SSK-PAP-S-12W	SSK-PAP-S-15W	SSK-PAP-S-20W
Input Power	3W	6W	12W	15W	20W
Size (mm)	82 x 82 x 24 (H)	120 x 120 x 24 (H)	170 x 170 x 24 (H)		220 x 220 x 24 (H)
Cut Out (mm)	φ66x φ66	φ105 x φ105	φ155 x φ155		φ205 x φ205
Input Voltage Range	AC 90-300V, 50Hz				
Power Factor	>0.9				
Colour temperature	6500K/4000K/3000K				
CRI	>75				
Beam Angle	>120°				
Lumens	>210lm	>420lm	>840lm	>1125lm	>1500lm
Ingress Protection	IP20				
Operating Temperature Range	-10°C ~ 50°C				
Housing	Thermoplastic + PC Diffuser				



Energy saving and lower power consumption



Wide operating voltage



No UV radiation



Recessed square panel



Eco-friendly



PANEL LIGHT

SYSKA LED Panel Lights are crafted for luxury. Their frosted cover and slim frame makes them perfect for your high-end interior lighting. Their primary usage includes lighting up of homes, office cabins, etc.



Details	SSK-PAB-6060B	SSK-PAB-6060-45W	SSK-PAB-30120-36W
Input Power	36W	45W	36W
Size (mm)	595 x 595 x 60 (H)		575 x 575 x 65 (H)
Input Voltage Range	AC 90-300V, 50Hz		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>3600lm	>4500lm	>3600lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Mounting	Armstrong		
Housing	MS		



Energy saving and lower power consumption



Wide operating voltage



Eco-friendly



No UV radiation



Recessed square panel



SSK-PAB-6060B

SSK-PAB-30120-36W

2 X 2 RECESSED LED PANEL LIGHT

Beautify your ceiling with these Syka LED Backlit Panel Lights. The lights save on energy consumption and have no adverse effect on the environment.



Details	SSK-TVP-6060-EXD-36W
Input Power	36W
Size (mm)	600 x 600 x 50 (H)
Input Voltage Range	AC 90-300V, 50Hz
Power Factor	>0.9
Colour Temperature	6500K/4000K/3000K
CRI	>75
Beam Angle	>120°
Lumens	>3600lm
Edgelit/Backlit	Backlit
Ingress Protection	IP20
Operating Temperature Range	-10°C ~ 50°C
Housing	MS



Energy saving and lower power consumption



Wide operating voltage



No UV radiation



Eco-friendly



2x2 Panel light



LED SURFACE PANEL LIGHTS

Home and office ceilings can look great with SYSKA LED Ceiling Lights. Choose from a wide range of elegant and subtle designs.



LED SURFACE PANEL LIGHT-SDC SERIES (ROUND)



Light up your homes or offices with these Syska LED Surface Panel Lights (SDC Series) which are designed to provide efficient lighting. They are easy to fix and have a lightweight, compact design.

Details	SSK-SDC-6W-N	SSK-SDC-12W-N	SSK-SDC-15W-N	SSK-SDC-18W-N	SSK-SDC-22W-N	SSK-SDC-30W-N
Input Power	6W	12W	15W	18W	22W	30W
Size (mm)	Ø120 x 32 (H)	Ø170 x 32 (H)		Ø225 x 32 (H)		Ø300 x 32 (H)
Input Voltage Range	AC 90-300V, 50Hz					
Power Factor	>0.9					
Colour Temperature	6500K/3000K					
CRI	>75					
Beam Angle	>120°					
Lumens	>420lm	>900lm	>1200lm	>1440lm	>1760lm	>2400lm
Ingress Protection	IP20					
Operating Temperature Range	-10°C ~ 50°C					
Housing	Pressure Die-Cast Aluminium					



Energy saving and lower power consumption



Wide operating voltage



Eco-friendly



No UV radiation



LED SURFACE PANEL LIGHT-SDS SERIES (SQUARE)



The Syska LED Surface Panel Lights (SDS Series) are designed to provide powerful lighting conditions. They are easy to fix and have a compact, lightweight design.

Details	SSK-SDS-6W-N	SSK-SDS-12W-N	SSK-SDS-15W-N	SSK-SDS-18W-N	SSK-SDS-22W-N	SSK-SDS-30W-N
Input Power	6W	12W	15W	18W	22W	30W
Size (mm)	120x120x32 (H)	170x170x32 (H)		225x225x32 (H)		300x300x32 (H)
Input Voltage Range	AC 90-300V, 50Hz					
Power Factor	>0.9					
Colour Temperature	6500K/3000K					
CRI	>75					
Beam Angle	>120°					
Lumens	>420lm	>900lm	>1200lm	>1440lm	>1760lm	>2400lm
Ingress Protection	IP20					
Operating Temperature Range	-10°C ~ 50°C					
Housing	Pressure Die-Cast Aluminium					



Energy saving and lower power consumption



Wide operating voltage



Eco-friendly



No UV radiation



LED SURFACE PANEL LIGHT-RIMS SERIES (ROUND)



The RIMS Series Surface Panel Lights (Round) are a brighter alternative to CFL panel lights. They are safe for the environment and easy to install as they come with a detachable ring.

Details	SSK-RIMS-R-6W	SSK-RIMS-R-10W	SSK-RIMS-R-15W	SSK-RIMS-R-20W
Input Power	6W	10W	15W	20W
Size (mm)	Ø100 x 31 (H)	Ø125 X 31 (H)	Ø150 X 31 (H)	Ø200 X 31 (H)
Input Voltage Range	AC 90-300V, 50Hz			
Power Factor	>0.9			
Colour Temperature	6500K/4000K/3000K			
CRI	>75			
Beam Angle	>120°			
Lumens	>600lm	>1000lm	>1500lm	>2000lm
Ingress Protection	IP20			
Operating Temperature Range	-10°C ~ 50°C			
Housing	Thermoplastic Housing + Metal Clap + PC Diffuser			

- Surface mounted panel light
- Good colour rendering
- Long lifespan (Up to 25,000 hrs)
- No UV radiation
- Eco-friendly
- Elliptical lens gives wide spread of light to cover maximum area
- Lightweight
- Energy saving and lower power consumption
- Rimless panel



LED SURFACE PANEL LIGHT-RIMS SERIES (SQUARE)



These RIMS Series LED Surface Panel Lights (Square) accentuate home and office spaces with their slim design and bright light. They are eco-friendly and help in conserving energy.

Details	SSK-RIMS-S-6W	SSK-RIMS-S-10W	SSK-RIMS-S-15W	SSK-RIMS-S-20W
Input Power	6W	10W	15W	20W
Size (mm)	100 x 100 x 31 (H)	125 x 125 x 31 (H)	150 x 150 x 31 (H)	200 x 200 x 31 (H)
Input Voltage Range	AC 90-300V, 50Hz			
Power Factor	>0.9			
Colour Temperature	6500K/4000K/3000K			
CRI	>75			
Beam Angle	>120°			
Lumens	>600lm	>1000lm	>1500lm	>2000lm
Ingress Protection	IP20			
Operating Temperature Range	-10°C ~ 50°C			
Housing	Thermoplastic Housing+Metal Clap+ PC Diffuser			

- Slim design
- Good colour rendering
- Long lifespan (Up to 25,000 hrs)
- No UV radiation
- Eco-friendly
- Energy saving and lower power consumption
- Rimless panel
- Elliptical lens gives a wide spread of light to cover maximum area
- Lightweight



LED SURFACE PANEL LIGHT-DSL SERIES

Bright enough, right enough. These LED Surface Panel Lights (DSL Series) are easy to install, have a slim design and are extremely efficient.



Details	SSK-DSL-7W	SSK-DSL-9W	SSK-DSL-12W
Input Power	7W	9W	12W
Size (mm)	Ø85 x 48 (H)	Ø110 x 48 (H)	Ø135 x 48 (H)
Input Voltage Range	AC 90-300V, 50Hz		
Power Factor	>0.9		
Colour Temperature	6500K/4000K/3000K/Red/Green/Blue/Pink		
CRI	>75		
Beam Angle	>120°		
Lumens	>700lm	>900lm	>1200lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Housing	Thermoplastic + PC		



Energy saving and lower power consumption



Slim design



Ceiling secure



Easy replacement



Detachable ring



Surface mounted panel light



LED SURFACE PANEL LIGHT-PSL SERIES

The PSL Surface Panel Lights are perfect for stores, offices, showrooms and homes. They liven up the space, are easy to install and save a lot on power consumption.



Details	SSK-PSL-7W	SSK-PSL-12W	SSK-PSL-20W
Input Power	7W	12W	20W
Size (mm)	Ø100 x 40 (H)	Ø145 x 40 (H)	Ø195 x 40 (H)
Input Voltage Range	AC 90-300V, 50Hz		
Power Factor	>0.9		
Colour Temperature	6500K/4000K/3000K		
CRI	>75		
Beam Angle	>120°		
Lumens	>630lm	>1080lm	>1800lm
Ingress Protection	IP20		
Operating Temperature Range	-10°C ~ 50°C		
Housing	Thermoplastic + PC		



Good colour rendering



No UV radiation



Eco-friendly



Lightweight



LED SURFACE PANEL LIGHT-ORN SERIES

Your home will emit a happy vibe with these LED Surface Panel Lights (ORN Series).
White, Blue and Blue+White are the 3 lighting modes available for you to choose from!

Details	SSK-ORN-S-6W-CW-BL	SSK-ORN-S-6W-CW-PK	SSK-ORN-S-6W-CW-WW	SSK-ORN-S-6W-CW-RD	SSK-ORN-S-6W-CW-GR
Input Power	6W+6W	6W+6W	6W+6W	6W+6W	6W+6W
Size (mm)	Ø86 x 44 (H)				
Input Voltage Range	AC 90-300V, 50Hz				
Power Factor	>0.9				
Colour Temperature	6500K+Blue	6500K+Pink	6500K+3000K	6500K+Red	6500K+Green
CRI	>75				
Beam Angle	>120°				
Lumens	>600lm				
Ingress Protection	IP20				
Operating Temperature Range	-10°C ~ 50°C				
Housing	Thermoplastic + PC				



Lightweight



Good colour rendering



No UV radiation



Eco-friendly



Energy saving and lower power consumption



LED TRACK LIGHTS

The Track Lights are perfect for lighting up showrooms and boutiques where there is a need for a focused lighting. These lights are set up along a rail and can be moved to light the subject in focus.










TRACK LIGHT (TRACK MOUNTED)

LED Track Lights are perfect when you want to illuminate an object with multiple lights. The fixtures rotate at a 360° angle, and the track mounting allows you to move the lights as per your convenience.

Details	SSK-TRE-10W SSK-TRS-10W	SSK-TRE-20W SSK-TRS-20W	SSK-TRE-30W SSK-TRS-30W	SSK-TRE-40W SSK-TRS-40W	SSK-TRE-50W SSK-TRS-50W
Input Power	10W	20W	30W	40W	50W
Size (LxWxH) mm	Ø60x105 (H)	Ø75x132 (H)	Ø96x175 (H)	Ø115x185 (H)	
Input Voltage Range	AC 90-300V, 50Hz				
Colour Temperature	6500K/4000K/3000K				
CRI	>75				
Beam Angle	>24°~36°				
Lumens	>800lm	>1600lm	>2400lm	>3200lm	>4000lm
Ingress Protection	IP20				
Operating Temperature Range	-10°C ~ 50°C				
Housing	Pressure Die-cast Aluminium				

MOUNTING TRACK FOR TRACK LIGHT

Details	SSK-TRE-2 way
Size (LxWxH) mm	975x35x25
Material	CRCA

-  Track & surface mounted
-  Wide operating voltage
-  Energy saving and lower power consumption
-  Eco-friendly
-  No UV radiation
-  COB track light
-  Control beam angle



LED STRIP LIGHTS & ROPE LIGHTS

Add custom accents to your home and office spaces and bring them to life with SYSKA LED Strip Lights. These LED Strip Lights are customisable and allow you to easily change the lighting mood. They are easy to install and can be wound up in a coil for storage.



LED STRIP LIGHTS

LED Strip Lights give you the design flexibility of using them as decorative light-rims on various structures.

They can also be wound up, coiled or used in any other non-linear or abstract design.

This combined with their five colour options, open up infinite possibilities.

Details	SSK-ST-8060-EX-D	SSK-ST-80120-EX-D	SSK-ST-80180-EX-D	SSK-ST-80240-EX-D
Input Power	6W	12W	18W	24W
Size (mtr)	5 Meters			
Input Voltage	DC 12V			
Colour Temperature	6500K/4000K/3000K/Red/Green/Blue/RGB			
LEDs/Mtr	60	120	180	240
LED Type	2835			
Lumens	>24-26lm			
Ingress Protection	IP20			
Operating Temperature Range	-10°C ~ 50°C			
Power Factor	>0.9			
Power Adapter (Voltage)	12V			

STRIP LIGHT ADAPTORS

Details	SSK-PA-12V-1A	SSK-PA-12V-2A	SSK-PA-12V-3A	SSK-PA-12V-4A	SSK-PA-12V-5A	SSK-PA-12V-6A	SSK-PA-12V-8A
Input Voltage	AC 90-300V, 50Hz						
DC Output Voltage	12V						
Output Current	1A	2A	3A	4A	5A	6A	8A



Long lifespan
(Up to 25,000 hrs.)



5 Meters



Eco-friendly



Energy-saving



LED SMART STRIP LIGHTS

The LED Smart Strip Lights are versatile and can be used as decor lighting in homes or fit seamlessly in various structures to illuminate them. They adapt to the shape of the structure whether abstract, coiled, wound up or generally non-linear. They have 5 colour variants and have a long lifespan.

Details	SSK-SMW-SL4-25W
Input Power	5W/ Meter
Size (mtr)	5 Meters
Input Voltage Range	AC 90-300V, 50Hz
Colour Temperature	RGB+CCT
LEDs/Mtr	90
LED Type	5050 + 2835
Lumens	>800lm
Ingress Protection	IP20
Power Factor	>0.9
Operating Temperature Range	-10°C ~ 50°C
Housing	PVC
Working On	Syska Smart App, Alexa



Long lifespan
(Up to 25,000 hrs.)

5

Meters



Eco-friendly



Energy-saving



LED ROPE LIGHTS

The LED Rope Light is flexible and can take the shape of the structure it illuminates. It is efficient and eco-friendly, with a long lifespan.

Details	SSK-ROPL-120L	
Input Power	8W / Meter	
Size (mtr)	50 Meters	15 Meters
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K/4000K/3000K/Red/ Green/ Blue	Tricolor
LEDs/Mtr	120	
LED Type	2835	
Lumens	>400-500lm / Meters	
Ingress Protection	IP67	
Power Factor	>0.9	
Operating Temperature Range	-10°C ~ 50°C	
Housing	PVC Extrusion	



Long lifespan
(Up to 25,000 hrs.)



Eco-friendly



Energy-saving



LED WEATHERPROOF BATTENS

Perfect for lighting up industry sheds, workshops and factories, SYSKA LED Weatherproof Battens are compact and robust. They light up a workplace for maximum visibility. They are durable and made to withstand weather conditions.



LED WEATHER PROOF BATTEN

The LED Weatherproof Batten is an anti-dust and waterproof light used for industrial application. Its linear diffuser creates a uniform pattern of light which illuminates the area evenly.

Details	SSK-WP-1018-N-18W	SSK-WP-1036-N-36W
Input Power	18W	36W
Size (mm)	650x110x85 (H)	1260x110x85 (H)
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K/4000K/3000K	
CRI	>75	
Beam Angle	>120°	
Lumens	>1800lm	>3600lm
Ingress Protection	IP65	
Operating Temperature Range	-10°C ~ 50°C	
Power Factor	>0.9	
Housing	ABS + Polycarbonate Cover	



Energy saving and lower power consumption



No UV radiation



Surface mounted batten



Wide operating voltage



Eco-friendly



LED BULKHEAD

Lighting of an industrial shed or an outdoor surrounding space should never be compromised. Our Bulkhead lights emit maximum brightness for longer hours and are robust enough to withstand dust, water and damage.



LED BULKHEAD LAMPS

These LED Bulkhead Lamps are just right to illuminate spaces outside your home. They are easy to install and have a long lifespan.

Details	SSK-BHP-12W	SSK-BHP-20W	SSK-BHP-24W	SSK-BHP-C-24W	SSK-BHP-S-24W
Input Power	12W	20W	24W	24W	24W
Size (mm)	156 x 75 x 44 (H)	235 x 115 x 48 (H)	255 x 130 x 42 (H)	200 x 42 (H)	200 x 200 x 42 (H)
Input Voltage	AC 90-300V, 50Hz				
Colour Temperature	6500K/4000K/3000K				
CRI	>75				
Beam Angle	>120°				
Lumens	>900lm	>1600lm	>2400lm		
Ingress Protection	IP65				
Operating Temperature Range	-10°C ~ 50°C				
Power Factor	> 0.9				
Housing	Thermoplastic + PC				



Energy saving and lower power consumption



Eco-friendly



Wide operating voltage



No UV radiation



LED CANOPY LIGHTS

The LED Canopy Lights are ideal to light up areas that are frequented by pedestrians and vehicles. This includes areas like hotel lobbies, petrol stations etc. The lights have a compact design and come with low heating technology and emit a uniform pattern of light.



LED CANOPY LIGHTS

The Syska LED Canopy Lights are specifically designed to provide outdoor lighting for areas like petrol stations and industrial sheds. The illumination is achieved with high light flux and uniform pattern of lighting. They also offer protection from dust and rain.

Details	SSK-CP-60W-S	SSK-CP-90W-S
Input Power	60W	90W
Size (mm)	400x400x75 (H)	
Input Voltage Range	AC 90-300V, 50Hz	
Cut Out (mm)	362x362	
Colour Temperature	6500K/4000K/3000K	
CRI	>75	
Beam Angle	>120°	
Lumens	>6000lm	>9000lm
Ingress Protection	IP65	
Operating Temperature Range	-10°C ~ 50°C	
Power Factor	> 0.9	
Housing	Pressure Die-cast Aluminium+ Clear acrylic diffuser	



Wide operating voltage



No UV radiation



Moisture proof




Energy saving and lower power consumption



LED WELL GLASS



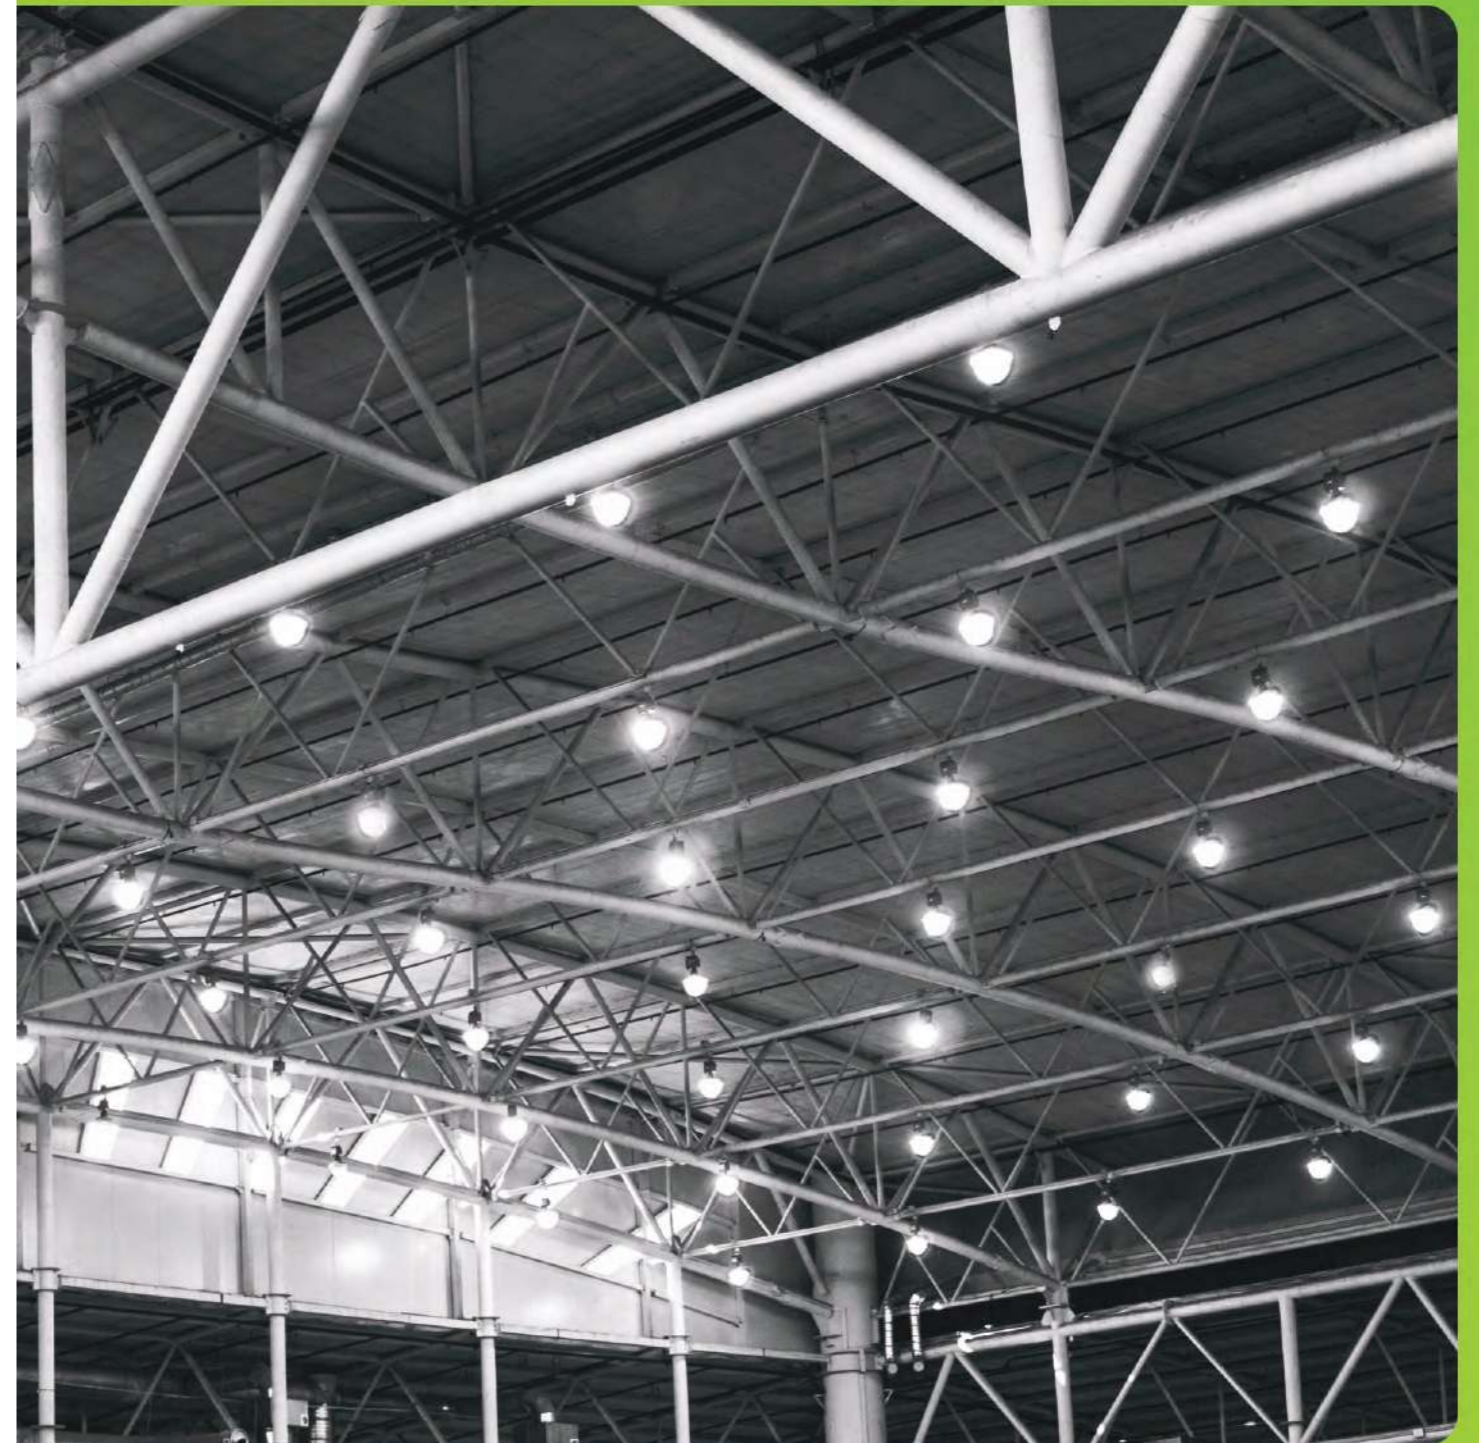


SYSKA LED Well Glass lights emit optimum lumens and have a wide dispersion of light, which makes them a great lighting solution for industrial sheds or party lawns. They save up to 70% energy and are extremely environment-friendly.



LED WELL GLASS

The Well Glass LED Lights are used to light up manufacturing industries as they emit optimum lumens that spreads its light wide. They save up to 70% energy and are extremely environment-friendly.



Details	SSK-WG-N3-36W	SSK-WG-N3-40W	SSK-WG-N3-45W	SSK-WG-N3-60W	SSK-WG-N3-80W
Input Power	36W	40W	45W	60W	80W
Size (mm)	Ø135 x 119mm (H)			Ø244 x 188 (H)	Ø215x150(H)
Input Voltage Range	90-300 VAC, 50Hz				
Colour Temperature	6500K/5700K				
CRI	>75				
Beam Angle	>120°				
Lumens	>3600lm	>4000lm	>4500lm	>6000lm	>8000lm
Power Factor	> 0.9				
Ingress Protection	IP66				
Diffuser	Frosted/Clear				
Mounting Type	Suspended with I-bolt/Bracket				
Operating Temperature Range	-10°C ~ 50°C				
Housing	Pressure Die-cast Aluminium				

-  Energy saving and lower power consumption
-  No UV radiation
-  Milk/Clear diffuser
-  Wide operating voltage
-  Eco-friendly
-  Moisture proof



LED HIGH-BAY LIGHTS

Cover a large workspace easily with SYSKA LED High-Bay Lights. They are designed to illuminate large areas with their wide dispersion and do not affect the environment. They also help you save on power consumption.

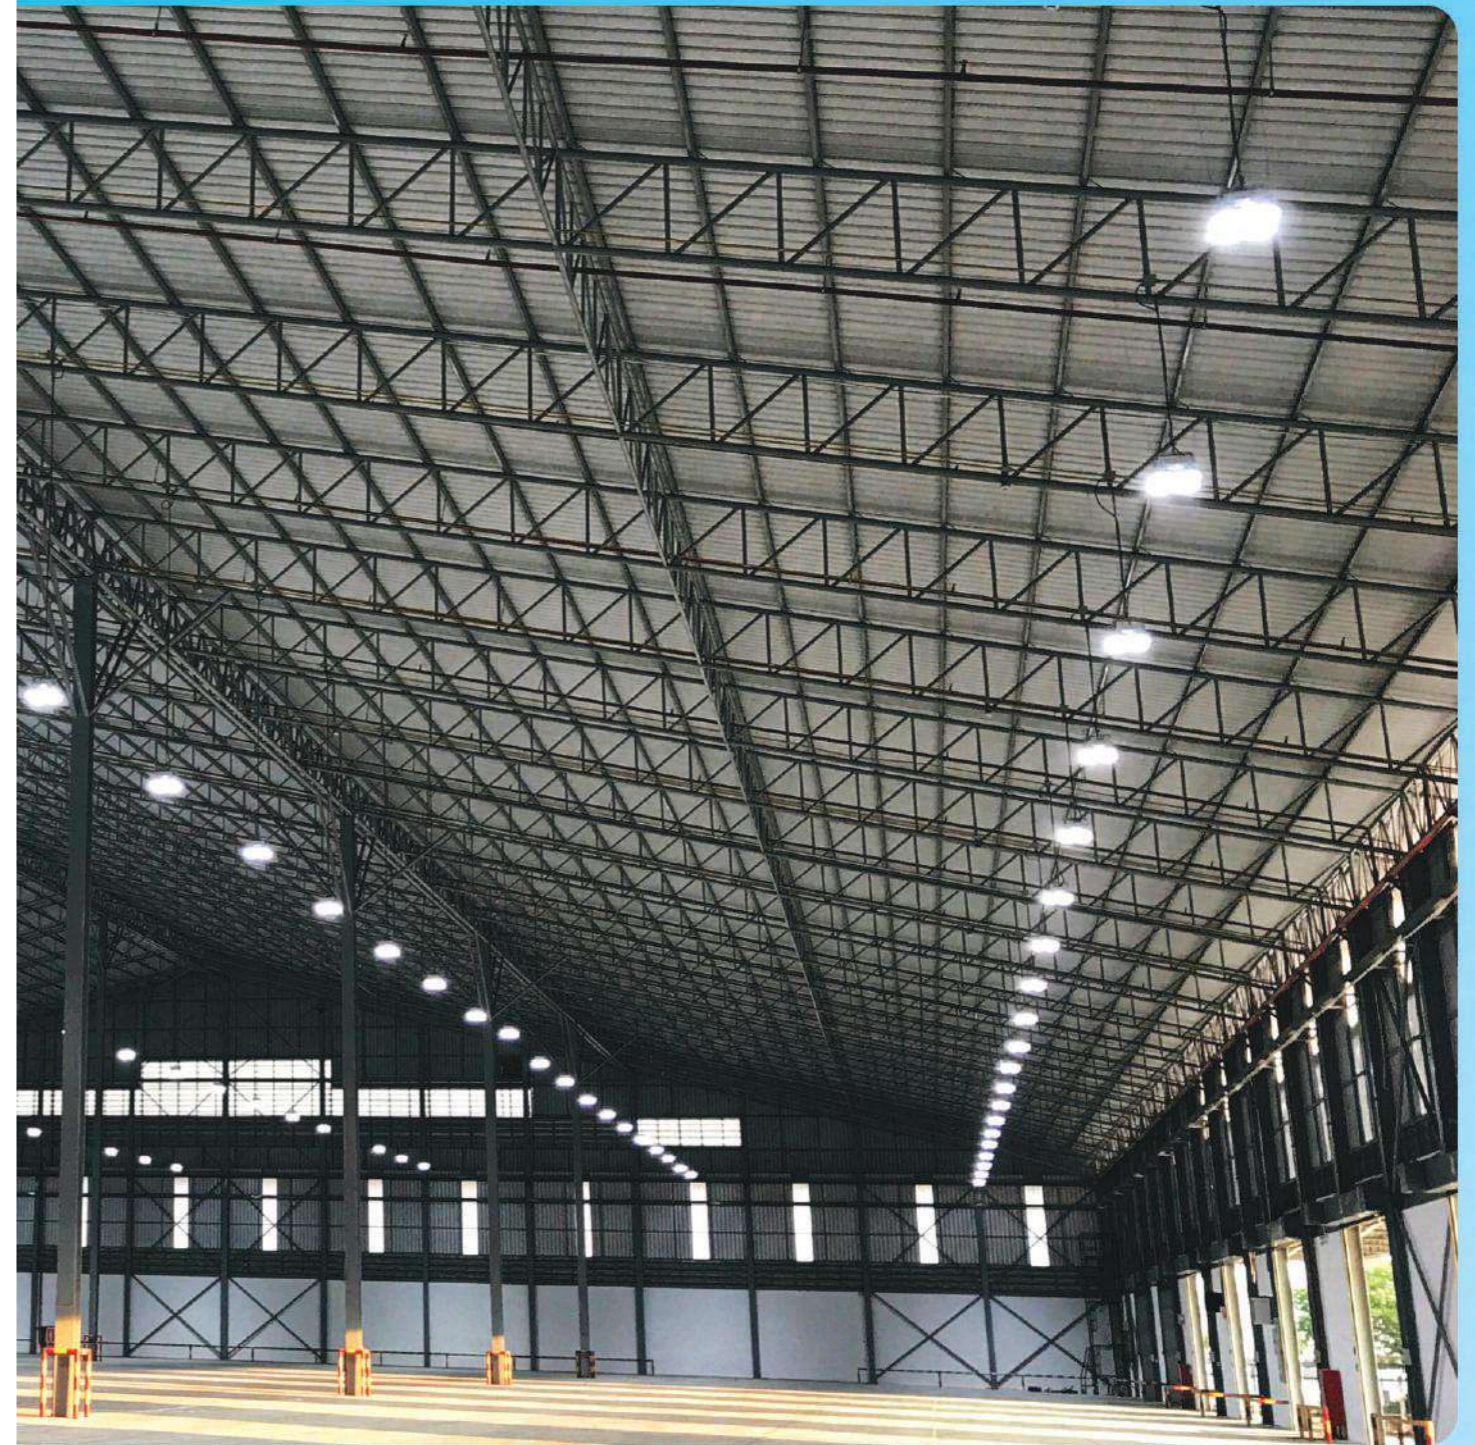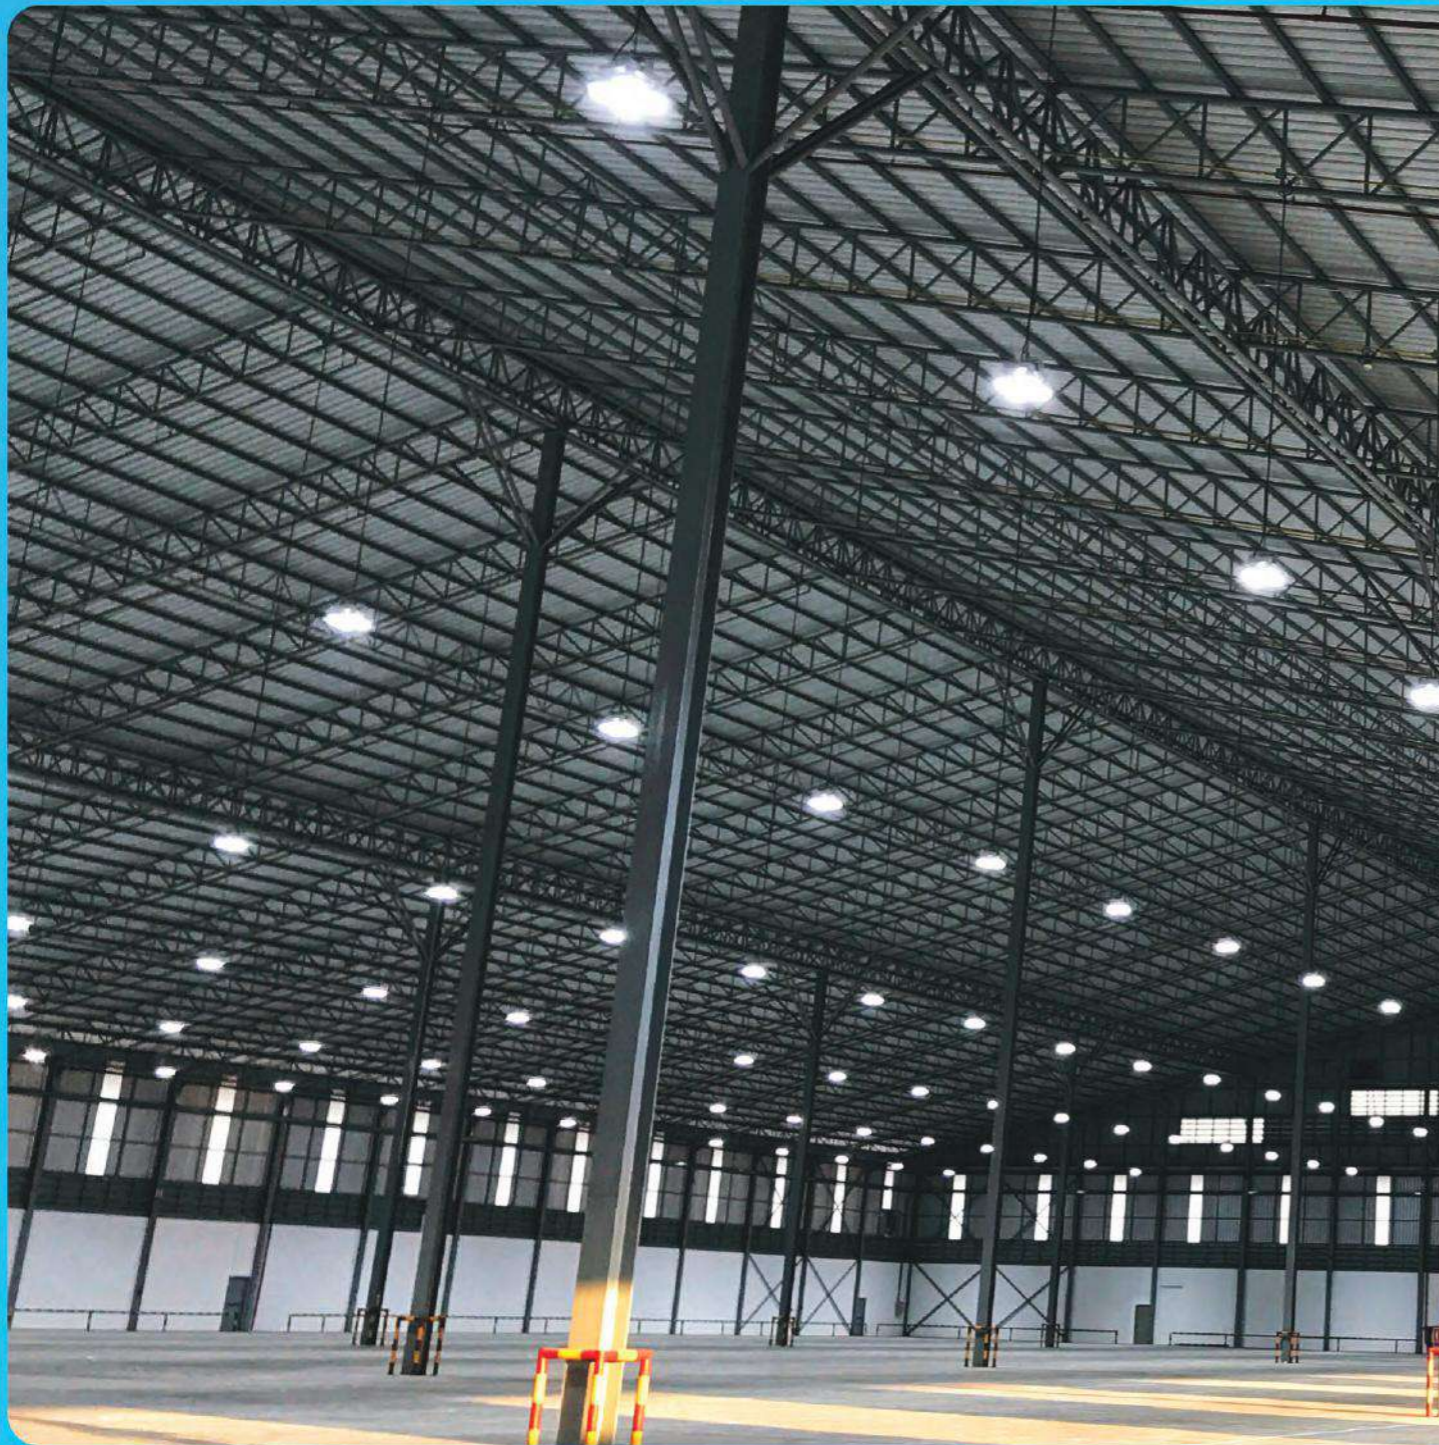

LED HIGH-BAY LIGHTS



These LED High Bay Lights are elegant and compact, shaped like a UFO they have a wide dispersion of light. They have a modern design and consume less power to offer higher illumination.

Details	SSK-UFO-80W	SSK-UFO-100W	SSK-UFO-120W	SSK-UFO-150W	SSK-UFO-200W	SSK-UFO-240W
Input Power	80W	100W	120W	150W	200W	240W
Size (mm)	Ø300x190 (H)			Ø330x201 (H)		
Input Voltage Range	AC 90-300V, 50Hz					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
Beam Angle	60°/90°/120°					
System Efficacy (Lm/W)	>150lm					
Lumens	>12000 lm	>15000 lm	>18000 lm	>22500 lm	>30000 lm	>36000 lm
Ingress Protection	IP65					
Operating Temperature Range	-10°C ~ 50°C					
Power Factor	>0.9					
Housing	Pressure Die-cast Aluminium					
Mounting	Suspended with I-Bolt					
Lens	PMMA Spiral Lens					
Surge Protection	Onboard 5 KV, External 10 KV					

- Energy saving and lower power consumption
- Replacement for high wattage HID lamps
- Moisture proof
- UFO Shaped Model
- 150 lm/watt lumens
- No UV radiation
- Wide operating voltage



LED HIGH-BAY LIGHTS

These LED High Bay Lights are elegant and compact, shaped like a UFO they have a wide dispersion of light. They have a modern design and consume less power to offer higher illumination.

Details	SSK-UFO-K-80W	SSK-UFO-K-100W	SSK-UFO-K-120W	SSK-UFO-K-150W	SSK-UFO-K-200W	SSK-UFO-K-240W
Input Power	80W	100W	120W	150W	200W	240W
Size (mm)	Ø292X135 (H)			Ø360X190 (H)		
Input Voltage Range	AC 90-300V, 50Hz					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
Beam Angle	60°/90°/120°					
System Efficacy (Lm/W)	>120lm					
Lumens	>9600 lm	>12000 lm	>14400 lm	>18000 lm	>24000 lm	>28800 lm
Ingress Protection	IP65					
Operating Temperature Range	-10°C ~ 50°C					
Power Factor	>0.9					
Housing	Pressure Die-cast Aluminium					
Mounting	Suspended with I-Bolt					
Lens	PMMA Spiral Lens					
Surge Protection	Onboard 5 KV, External 10 KV					

- Energy saving and lower power consumption
- 120 lm/watt lumens
- Moisture proof
- No UV radiation
- Eco-friendly
- Wide operating voltage



LED HIGH-BAY LIGHTS

These LED High Bay Lights are elegant and compact, shaped like a UFO they have a wide dispersion of light. They have a modern design and consume less power to offer higher illumination.

Details	SSK-UFO-E-80W	SSK-UFO-E-100W	SSK-UFO-E-120W	SSK-UFO-E-150W	SSK-UFO-E-200W	SSK-UFO-E-240W
Input Power	80W	100W	120W	150W	200W	240W
Size (mm)	Ø262x124 (H)					
Input Voltage Range	AC 90-300V, 50Hz					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
Beam Angle	60°/90°/120°					
System Efficacy (Lm/W)	>120lm					
Lumens	>9600 lm	>12000 lm	>14400 lm	>18000 lm	>24000 lm	>28800 lm
Ingress Protection	IP65					
Operating Temperature Range	-10°C ~ 50°C					
Power Factor	>0.9					
Housing	Pressure Die-cast Aluminium					
Mounting	Suspended with I-Bolt					
Lens	PMMA Lens					
Surge Protection	Onboard 5 KV, External 10 KV					



Energy saving and lower power consumption



120 lm/watt lumens



Moisture proof



No UV radiation



Eco-friendly



Wide operating voltage



LED FLOOD LIGHTS

For areas where you need a large amount of light, SYSKA LED Beam/Flood Lights get the job done and at a much lesser cost. Choose from a wide range of specially designed LED Flood Lights whether it be a sports event or a wedding.



BLE SERIES FLOOD LIGHTS



Light up the outdoors of your home with these powerful Syska LED Flood Lights. The lights have a wide beam and consume less energy.

Details	SSK-BLE-10W	SSK-BLE-20W	SSK-BLE-40W	SSK-BLE-60W	SSK-BLE-70W	SSK-BLE-90W	SSK-BLE-120W
Input Power	10W	20W	40W	60W	70W	90W	120W
Size (LxWxH) (mm)	110x85x21 (H)	140x104x26 (H)	220x215x40 (H)		275x265x52 (H)		295x275x60 (H)
Input Voltage Range	AC 90-300V, 50Hz						
Colour Temperature	6500K/4000K/3000K						
CRI	>75						
System Efficacy (Lm/W)	>120lm						
Beam Angle	>120°						
Lumens	>1200 lm	>2400 lm	>4800 lm	>7200 lm	>8400 lm	>10800 lm	>14400 lm
Ingress Protection	IP66						
Operating Temperature	-10°C ~ 50°C						
Power Factor	>0.9						
Housing	Pressure Die-cast Aluminium with Toughened Glass Cover						
Surge Protection	Onboard 3 KV		Onboard 4 KV			Onboard 4 KV & External 10 KV	



Energy saving and lower power consumption



No UV radiation



BLE SERIES FLOOD LIGHTS



Light up the outdoors of your home with these powerful Syska LED Flood Lights. The lights have a wide beam and consume less energy.

Details	SSK-BLE-150W	SSK-BLE-200W	SSK-BLE-250W	SSK-BLE-300W	SSK-BLE-350W	SSK-BLE-400W
Input Power	150W	200W	250W	300W	350W	400W
Size (LxWxH) (mm)	295x275x60 (H)	360x331x76 (H)		500x650x70 (H)		
Input Voltage Range	AC 90-300V, 50Hz					
Colour Temperature	6500K/4000K/3000K					
CRI	>75					
System Efficacy (Lm/W)	>120lm					
Beam Angle	>120°					
Lumens	>18000 lm	>24000 lm	>30000 lm	>36000 lm	>42000 lm	>48000 lm
Ingress Protection	IP66					
Operating Temperature	-10°C ~ 50°C					
Power Factor	>0.9					
Housing	Pressure Die-cast Aluminium with Toughened Glass Cover					
Surge Protection	Onboard 4 KV, External 10 KV					



Energy saving and lower power consumption



No UV radiation



BLE SERIES WITH LENS FLOOD LIGHT

Light up the outdoors of your home with these powerful Syska LED Flood Lights.

The lights have a wide beam and consume less energy.

Details	SSK-BLE-120W-WL	SSK-BLE-150W-WL	SSK-BLE-200W-WL	SSK-BLE-250W-WL	SSK-BLE-300W-WL	SSK-BLE-350W-WL	SSK-BLE-400W-WL
Input Power	120W	150W	200W	250W	300W	350W	400W
Size (LxWxH) (mm)	295x275x60 (H)		360x331x76 (H)		500x650x70 (H)		
Input Voltage Range	AC 90-300V, 50Hz						
Colour Temperature	6500K/4000K/3000K						
CRI	>75						
System Efficacy (Lm/W)	>120lm						
Beam Angle	60/90°						
Lumens	>14400 lm	>18000 lm	>24000 lm	>30000 lm	>36000 lm	>42000 lm	>48000 lm
Ingress Protection	IP66						
Operating Temperature	-10°C ~ 50°C						
Power Factor	>0.9						
Housing	Pressure Die-cast Aluminium with Toughened Glass Cover						
Mounting	Bracket Mounting						
Lens	PMMA Lens						
Surge Protection	Onboard 4 KV, External 10 KV						



Energy saving and lower power consumption



No UV radiation



Moisture proof



Wide operating voltage



Eco-friendly



Sleek design



BLE MG SERIES FLOOD LIGHTS

Light up the outdoors of your home with these powerful Syska LED Flood Lights. The lights have a wide beam and consume less energy.



Details	SSK-BLE-50W-MG	SSK-BLE-100W-MG
Input Power	50W	100W
Size (LxWxH) (mm)	226x220x50 (H)	282x302x78.5 (H)
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K/4000K/3000K	
CRI	>75	
System Efficacy (Lm/W)	>120lm	
Beam Angle	>120°	
Lumens	>6000 lm	>12000 lm
Ingress Protection	IP66	
Operating Temperature	-10°C ~ 50°C	
Power Factor	>0.9	
Housing	Pressure Die-cast Aluminium with Toughened Glass Cover	
Surge Protection	Onboard 5 KV, External 10 KV	

- Energy saving and lower power consumption
- No UV radiation
- Moisture proof
- Wide operating voltage
- Eco-friendly
- Sleek design



LED FLOOD LIGHT BLH SERIES

Light up the outdoors of your home with these powerful Syska LED Flood Lights. The lights have a wide beam and consume less energy.



Details	SSK-BLH-100W	SSK-BLH-120W	SSK-BLH-150W	SSK-BLH-200W	SSK-BLH-250W	SSK-BLH-300W	SSK-BLH-350W	SSK-BLH-400W
Input Power	100W	120W	150W	200W	250W	300W	350W	400W
Size (mm)	295x250x255 (H)	320x238x55 (H)	320x238x55 (H)	390x290x55 (H)	370x416x70 (H)	370x416x70 (H)	445x405x75 (H)	445x405x75 (H)
Input Voltage Range	AC 90-300V, 50Hz							
Colour Temperature	6500K/3000K							
CRI	>75							
System Efficacy (Lm/W)	>120lm/W							
Beam Angle	>120°							
Lumens	>12000lm	>14000lm	>18000 lm	>24000 lm	>30000lm	>36000lm	>42000lm	>48000lm
Ingress Protection	IP66							
Operating Temperature	-10°C ~ 50°C							
Power Factor	>0.9							
Housing	Pressure Die-cast Aluminium+ Toghned Glass							
Surge Protection	Onboard 5KV, External 10KV							

- Energy saving and lower power consumption
- No UV radiation
- Moisture proof
- Wide operating voltage
- Eco-friendly
- Sleek design




BLS HM SERIES FLOOD LIGHTS

Let's light up the country one flood light at a time. They are energy efficient and have a wide operating voltage.




Details	SSK-BLS-200W-HM	SSK-BLS-250W-HM	SSK-BLS-300W-HM	SSK-BLS-350W-HM	SSK-BLS-400W-HM	SSK-BLS-500W-HM
Input Power	200W	250W	300W	350W	400W	500W
Size (LxWxH) (mm)	390x299x150 (H)			510x395x155 (H)		
Input Voltage Range	AC 90-300V, 50Hz					
Colour Temperature	6500K/3000K					
CRI	>75					
System Efficacy (Lm/W)	>120lm					
Beam Angle	36°/60°/90°					
Lumens	>24000 lm	>30000 lm	>36000 lm	>42000 lm	>48000 lm	>60000 lm
Ingress Protection	IP66					
Operating Temperature	-10°C ~ 50°C					
Power Factor	>0.9					
Housing	Pressure Die-cast Aluminium with Toughened Glass Cover					
Mounting	Bracket Mounting					
Lens	PMMA Lens					
Surge Protection	4 KV Onboard, External Surge 10KV- 20KV (Optional)					



Lower power consumption and energy saving



No UV radiation



Wide operating voltage



Eco-friendly




MSL SERIES FLOOD LIGHTS

Making spaces brighter and safer and these flood lights. They are energy efficient and have a wide operating voltage.



Details	SSK-MSL-500W	SSK-MSL-750W	SSK-MSL-1000W
Input Power	500W	750W	1000W
Size (LxWxH) (mm)	588x588x445 (H) (per module)		
Input Voltage Range	AC 90-300V, 50Hz		
Colour Temperature	6500K		
CRI	>75		
System Efficacy (Lm/W)	>120lm		
Beam Angle	10°/30°/60°/90°		
Lumens	>60000 lm	>90000 lm	>120000 lm
Ingress Protection	IP66		
Operating Temperature	-10°C ~ 50°C		
Power Factor	>0.9		
Housing	Pressure Die-cast Aluminium		
Mounting	Bracket Mounting		
Lens	PMMA Lens		
Surge Protection	Onboard 4 KV, External 10 KV-20 KV		



Energy saving and lower power consumption



No UV radiation



LED STREET LIGHTS

Have no fear when walking in the night under SYSKA LED Street Lights which light up the streets and help you see better. They can also be used for lighting up campuses or gardens and are much more efficient than traditional lighting solutions. Their optic lenses allow them to light up larger areas so you do not have to spend on setting up more lights for the streets.



LED STREET LIGHTS-MAXGLOW



Do not be afraid to roam the streets at night with these LED Street Lights above you. They light up a larger area, which decreases the expenditure and hassles of setting up more lights.

Details	SSK-ST-25W-MG	SSK-ST-40W-MG
Input Power	25W	40W
Size (LxWxH) (mm)	320 x 75 x 60 (H)	
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K	
CRI	>75	
System Efficacy (Lm/W)	>100lm	
Beam Angle	>120°	
Lumens	>2500 lm	>4000 lm
Ingress Protection	IP66	
Operating Temperature	-10°C ~ 50°C	
Power Factor	>0.9	
Housing	Pressure Die-cast Aluminium	
Mounting	Pole Mount	
Surge Protection	Onboard 4 KV	Onboard 4 KV, External 10 KV

- Street light
- Wide operating voltage
- Moisture proof
- No UV radiation
- Eco-friendly
- Energy saving and lower power consumption
- Pole mounted



LED STREET LIGHTS-SLF-CF



This strong, sturdy, thermally efficient street light is ready to operate in any environment. They light up a larger area, which decreases the expenditure and hassles of setting up more lights.

Details	SSK-SLF-CF-12W	SSK-SLF-CF-18W	SSK-SLF-CF-25W	SSK-SLF-CF-40W	SSK-SLF-CF-45W	SSK-SLF-CF-60W	SSK-SLF-CF-72W	SSK-SLF-CF-90W	SSK-SLF-CF-120W	SSK-SLF-CF-150W
Input Power	12W	18W	25W	40W	45W	60W	72W	90W	120W	150W
Size (LxWxH) (mm)	330x115x75 (H)			395x190x85 (H)			465x230x85 (H)			
Input Voltage Range	AC 90-300V, 50Hz									
Colour Temperature	6500K									
CRI	>75									
System Efficacy (Lm/W)	>100lm									
Beam Angle	>120°									
Lumens	>1200 lm	>1800 lm	>2500 lm	>4000 lm	>4500 lm	>6000 lm	>7200 lm	>9000 lm	>12000 lm	>15000 lm
Ingress Protection	IP66									
Operating Temperature	-10°C ~ 50°C									
Power Factor	>0.9									
Housing	Pressure Die-cast Aluminium									
Mounting	Pole Mount									
Surge Protection	Onboard 4 KV, External 10KV									

- Energy saving and lower power consumption
- No UV radiation
- Moisture proof
- Street light
- Wide operating voltage
- Eco-friendly
- Pole mounted



LED STREET LIGHTS-SLF-CF WITH LENS



This strong, sturdy, thermally efficient street light is ready to operate in any environment. Their optic lenses light up a larger area, which decreases the expenditure and hassles of setting up more lights.

Details	SSK-SLF-CF-25W-[WL]	SSK-SLF-CF-40W-[WL]	SSK-SLF-CF-45W-[WL]	SSK-SLF-CF-60W-[WL]	SSK-SLF-CF-72W-[WL]	SSK-SLF-CF-90W-[WL]	SSK-SLF-CF-120W-[WL]	SSK-SLF-CF-150W-[WL]
Input Power	25W	40W	45W	60W	72W	90W	120W	150W
Size (LxWxH) (mm)	330x115x75 (H)	395x190x85 (H)		465x230x85 (H)				
Input Voltage Range	AC 90-300V, 50Hz							
Colour Temperature	6500K							
CRI	>75							
System Efficacy (Lm/W)	>110lm							
Beam Angle	90°							
Lumens	>2750 lm	>4400 lm	>4950 lm	>6600 lm	>7920 lm	>9900 lm	>13200 lm	>16500 lm
Ingress Protection	IP66							
Operating Temperature	-10°C ~ 50°C							
Power Factor	>0.9							
Housing	Pressure Die-cast Aluminium							
Mounting	Pole Mount							
Surge Protection	Onboard 4 KV, External 10 KV							

- Energy saving and lower power consumption
- No UV radiation
- Moisture proof
- Street light
- Wide operating voltage
- Eco-friendly
- Pole mounted



LED STREET LIGHTS-STGT SERIES



Enjoy a beautiful drive on those well-lit roads with these Syska LED Street Lights. They have a sleek design, optic lenses and an opening at the back for serviceability.

Details	SSK-STGT-180W	SSK-STGT-200W	SSK-STGT-210W	SSK-STGT-220W	SSK-STGT-250W
Input Power	180W	200W	210W	220W	250W
Size (LxWxH) (mm)	535x263x100 (H)				
Input Voltage Range	AC 90-300V, 50Hz				
Colour Temperature	6500K/5700K				
CRI	>75				
System Efficacy (Lm/W)	>120lm				
Beam Angle	>120°				
Lumens	>21600 lm	>24000 lm	>25200 lm	>26400 lm	>30000 lm
Ingress Protection	IP66				
Operating Temperature	-10°C ~ 50°C				
Power Factor	>0.9				
Housing	Pressure Die-cast Aluminium				
Lens	PMMA Lens				
Mounting	Pole Mount				
Surge Protection	Onboard 4 KV, External 10KV [& 20KV Optional]				

- Energy saving and lower power consumption
- No UV radiation
- Street light
- Moisture proof
- Wide operating voltage
- Eco-friendly
- Pole mounted



LED STREET LIGHTS-NST SERIES

Late night walks made safer and brighter with these street lights.
They are moisture proof and can be pole mounted.



Details	SSK-NST-20W	SSK-NST-30W	SSK-NST-40W	SSK-NST-50W	SSK-NST-100W
Input Power	20W	30W	40W	50W	100W
Size (LxWxH) (mm)	283x113x43 (H)	308x128x53 (H)	325x128x53 (H)	400x140x48 (H)	525x182x56 (H)
Input Voltage Range	AC 90-300V, 50Hz				
Colour Temperature	6500K				
CRI	>75				
System Efficacy (Lm/W)	>100lm				
Beam Angle	>90°				
Lumens	>2000 lm	>3000 lm	>4000 lm	>5000 lm	>10000 lm
Ingress Protection	IP65				
Operating Temperature	-10°C ~ 50°C				
Power Factor	>0.9				
Housing	Pressure Die-cast Aluminium				
Lens	PMMA Lens				
Mounting	Pole Mount				
Surge Protection	Onboard 4 KV		Onboard 4 KV, External 10 KV		

- Energy saving and lower power consumption
- No UV radiation
- Street light
- Moisture proof
- Wide operating voltage
- Eco-friendly
- Pole mounted
- Sleek design



LED STREET LIGHTS-SSL SERIES

Here's a street light powered by the rays of the sun. They have a wide operating voltage, are moisture proof and can be pole mounted.



Details	SSK-SSL-12W	SSK-SSL-15W	SSK-SSL-20W	SSK-SSL-30W
Rated Voltage DC	12.8V			
Size (LxWxH) (mm)	540x400x 42 (H)		750x400x42 (H)	1155x400x42 (H)
Solar Panel Capacity	30W	40W	50W	
Battery Capacity	6 Ah	12 Ah	18 Ah	
Colour Temperature	6500K			
Light Duration (Full Power) on fully Charged Battery (Approx.)	10-12 Hrs			
Charging Time on Clear sunny day Approx	8-12 Hrs			
Solar Panel	High Efficiency Integrated Mono Crystalline			
Over Voltage Cutoff	14.6V			
Lens Type	PMMA Lens			
CRI	>75			
System Efficacy (Lm/W)	110-120 lm			
Beam Angle	90-120°			
Lumens	>1320 lm	>1650 lm	>2200 lm	>3300 lm
Ingress Protection	IP65			
Operating Temperature	-10°C ~ 50°C			
Power Factor	>0.9			
Housing	Pressure Die-cast Aluminium			
Mounting	Pole Mount			

- Energy saving and lower power consumption
- Wide operating voltage
- No UV radiation
- Solar Street Light
- Moisture proof
- Pole mounted
- Eco-friendly
- Sleek design



LED STREET LIGHTS-SST (D5 & E5) SERIES



Here's to brighter and safer streets. The lights are moisture proof and can be pole mounted.

Details	SSK-SST-36W-D5	SSK-SST-45W-D5	SSK-SST-60W-D5	SSK-SST-72W-D5	SSK-SST-90W-D5	SSK-SST-120W-D5	SSK-SST-150W-D5	SSK-SST-180W-D5	SSK-SST-200W-D5	SSK-SST-220W-D5	SSK-SST-250W-D5
Input Power	36W	45W	60W	72W	90W	120W	150W	180W	200W	220W	250W
Size (LxWxH) (mm)	253x85x70 (H)		300x153x89 (H)			366x196x90 (H)		525x250x95 (H)		580x266x115 (H)	580x266x116 (H)
Input Voltage Range	AC 90-300V, 50Hz										
Colour Temperature	6500K/5700K/4000K/3000K										
CRI	>75										
System Efficacy (Lm/W)	>110lm										
Beam Angle	>90°										
Lumens	>3960lm	>4950lm	>6600lm	>7920lm	>11000lm	>13200lm	>16500lm	>19800lm	>22000lm	>24200lm	>27500lm
Ingress Protection	IP66										
Operating Temperature	-10°C ~ 50°C										
Power Factor	>0.9										
Housing	Pressure Die-cast Aluminium										
Lens	PMMA Lens										
Mounting	Pole Mount										
Surge Protection	Up to 4 KV, External 10 KV [20KV Optional]										

- Energy saving and lower power consumption
- Wide operating voltage
- Eco-friendly
- Pole mounted
- Sleek design
- No UV radiation
- Street light
- Moisture proof



SENSOR STREET LIGHTS SERIES




This innovative street light comes with a sensor. Which senses the daylight and switches off and starts back on when it get dark.

Details	SSK-ST-36W-S	SSK-ST-45W-S
Input Power	36W	45W
Size (LxWxH) (mm)	315x125x60 (H)	380x125x60 (H)
Input Voltage Range	AC 90-300V, 50Hz	
Colour Temperature	6500K	
CRI	>75	
System Efficacy (Lm/W)	>100lm	
Beam Angle	>90°	
Lumens	>3600 lm	>4500 lm
Ingress Protection	IP66	
Operating Temperature	-10°C ~ 50°C	
Lens Type	PMMA Lenses	
Power Factor	>0.9	
Sensor Details	Dusk to Dawn	
Housing	Pressure Die-cast Aluminium	
Mounting	Pole Mount	
Surge Protection	5/6KV Onboard	

- Energy saving and lower power consumption
- Wide operating voltage
- Eco-friendly
- No UV radiation
- Long lifespan (Up to 50,000 hrs)
- Day/Night Sensor
- Elliptical lens gives wide spread of light to cover maximum area



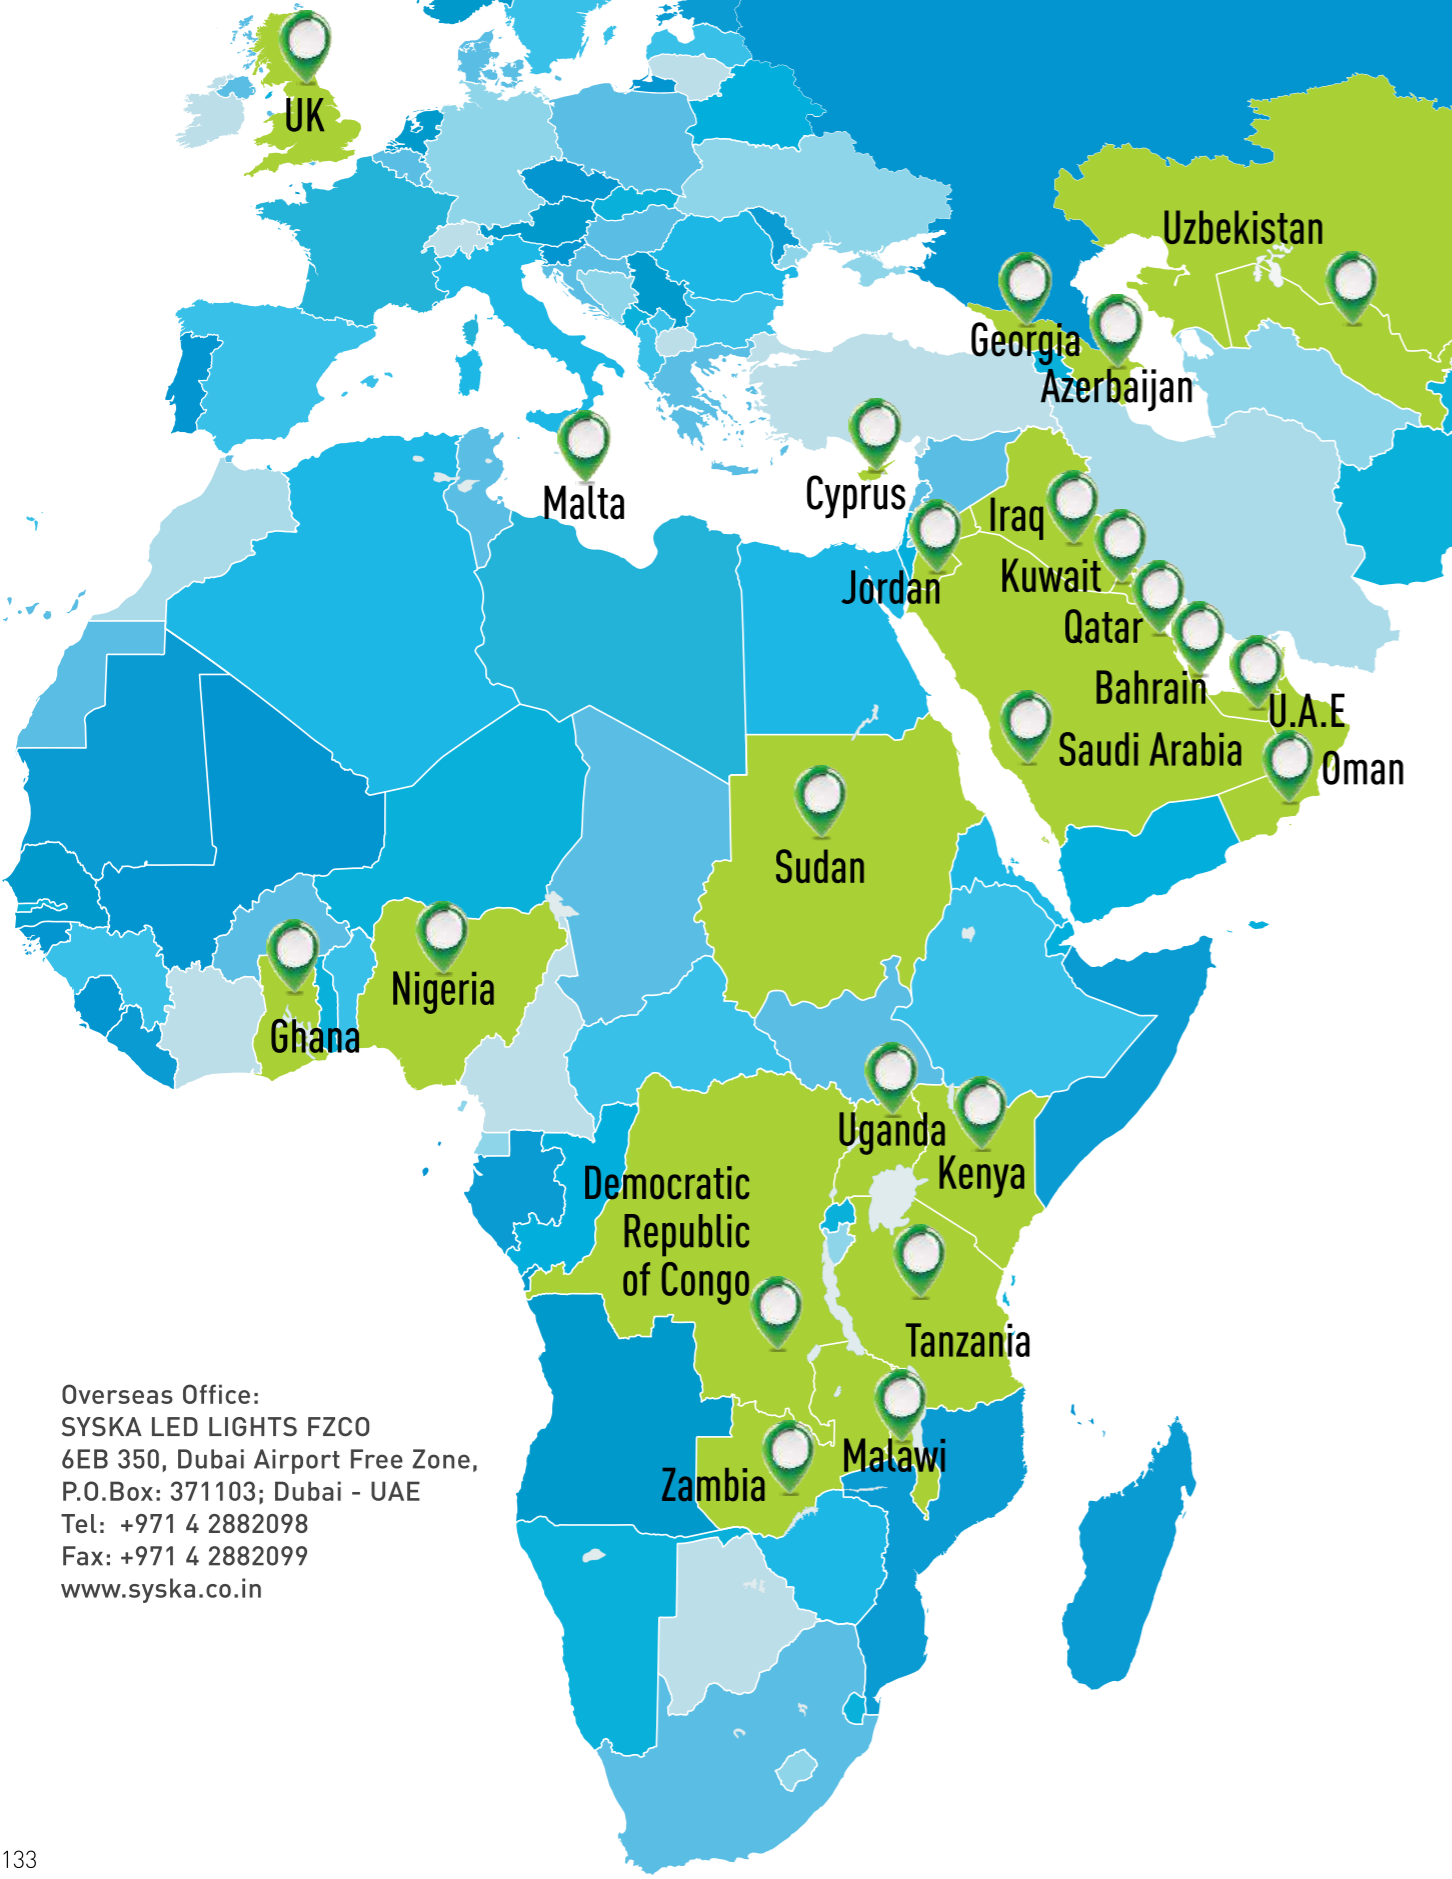

*This map is a graphical representation designed for general reference purposes only.

Overseas Office:
SYSKA LED LIGHTS FZCO
6EB 350, Dubai Airport Free Zone,
P.O.Box: 371103; Dubai - UAE
Tel: +971 4 2882098
Fax: +971 4 2882099
www.syska.co.in

NOTES

NORTH

New Delhi: DSM-355 and DSM-356, DLF Towers, 15 Shivaji Marg / Najafgarh Road, West Delhi-110015. Tel. 011-49442901

Ghaziabad: A-44, Ground Floor, Pacific Business Park, Site-4, Sahibabad, Ghaziabad - 201010. Tel.: 0120-4227371/70.

Lucknow: Office Space No. 107, First Floor, Cyber Height, Vibhuti Khand, Gomti Nagar, Lucknow-226010. Tel.: 0522-4024789.

Mohali: SCO No: 14, 1st Floor, Near Bestech Square Mall, Sector 66A, Industrial Area, Phase - 9 Mohali, Punjab - 160062.

Ludhiana: 4th Floor, SCO- 122, Near Hotel 'A', Feroze Gandhi Market, Ludhiana - 141001. Tel.: 0161-5079788.

Jammu: CB-13, Gupta Towers, 3rd Floor, Rail Head Complex, Bahu Plaza, Gandhi Nagar, Above HDFC Bank, Jammu - 180004. Tel.: 2477574.

Noida: H-107, Sector-63, Noida - 201301 U.P. Tel. +91 120 4227370

EAST

Kolkata: Arcadia Central -1st Floor, Room no.-1A, 31, Dr. Ambedkar Sarani Road, Kolkata - 700046. Tel.: 033-40632387.

Patna: 3rd Floor, Bindeshwari Plaza, Near Income Tax Golambar, Kidwaipuri, Patna - 800001.

Ranchi: Unit No.701, Situated at Eastern Mall, Village Konka, Thana-Lalpur, Dist. Ranchi - 835214.

Bhubaneswar: C/o Ananta Niwas, Plot No. 362/3855, 1st Floor, In front of BMC Main Gate, Gautam Nagar, Kalpana Square, Bhubaneswar - 751014.

Guwahati: Basanta Enclave, 4th Floor, Opp. Royal Arcade, B Baruah Road, Ulubari, Guwahati - 781007, Assam. Tel.: 0361-2460018.

WEST

Mumbai: 601, 6th Floor, Centre Point, Andheri Kurla Road, Opp. JB Chakala Metro Station, Andheri East, Mumbai - 400059. Tel.: 022-40150819.

Ahmedabad: 601-602, 6th Floor, Aarya Epoch, Opp. Passport Sewa Kendra - 2, Next to Tata Motors, Above Brand Factory, Vijay cross road, Navrangpura, Ahmedabad - 380009, Tel.: 079-40308054.

Jaipur: 410, 4th floor, ARG Corporate Park, Gopal Bari, Ajmer Road, Opp. Mission Compound, Jaipur - 302006. Tel.: 0141-2369909.

Bhopal: A-2, 5th Floor, Platinum Plaza, Near Mata Mandir, T.T. Nagar, Bhopal, MP - 462003, Tel.: 0755-4295695.

Indore: 411, PU4, Satguru Parinay Apts, 4th Floor, A.B. Road, Opp. C21 Mall, Indore - 452010. Tel.: 0731-2558262, 4096912.

Raipur: HP Plaza, Shop no. - 2-3, Beside Chawla Petrol Pump, In front of Kachehri Chowk, Raipur - 492001, Tel.: - 0771-4070771.

Nagpur: Plot No. 116, Ghare Marg, Behind Dinanth School, Dhantoli, Nagpur - 440012.

Nashik: Office no. - 11-A, Business Bay, 2nd Floor, Shrihari Kute Marg, Near Hotel Sandip, Mumbai Naka, Nashik - 422002. Tel.: 0253-2450800.

Jalgaon: A-101, Major Corner, Near Vodafone Gallery, Ganesh Colony Road, Jalgaon - 425001.

SOUTH

Bengaluru: Enzyme Tech Park, 2nd Floor, No. 4, Kempegowda Service Road, 1st Stage, Domlur, Near Post Office, Old Airport Road, Bengaluru - 560071. Tel.: 080-41694599.

Hyderabad: Lumbini Arcade, Unit No.2, 3rd Floor, Municipal No. 1-10-71 & 74 old, 1-10-73/2 New Survey Nos.42 & 51 Main Road, Begumpet, Secunderabad T. S. - 500016. Tel. 040-66666711

Chennai: No. 151, Gee Gee Emerald, 5th Floor, Nungambakkam, Chennai - 600034. Tel.: 044-42175355.

Kochi: 48/425-P, C/o Cheryl Enterprises, Elamakkara, P.O., Kochi, Kerala - 682026. Tel.: 0484-2536062, 2536063.



SYSKA LED Lights Pvt. Ltd.

Corp. Office: Syska House, Plot No. - 89/90/91,

Survey No. - 232/1/2, Off VIP Airport Road,

Lane No. - 4, Sakore Nagar, Lohegaon, Pune - 411014

Toll Free: 1800 102 8787

Email: support@syska.co.in

www.syska.co.in