

LET'S CELEBRATE  
THE BRIGHTER SIDE OF LIFE



# WHY ORIENT?

## ONE STOP BRAND FOR ELECTRICAL LIFESTYLE SOLUTIONS

Life is hectic. But when it comes to choosing lifestyle appliances, we make it a simple task. For, you just need to rely on one name to find the right kind of appliances for your home. Orient Electric.

A distinguished name in the consumer electrical space for more than 65 years, Orient Electric has established itself as a one-stop provider of fans, lighting, home appliances, switchgears and other electrical solutions.

Speaking of range and presence, we have the widest range of products meeting domestic and international needs with presence in over 40 international markets, and in the domestic market, we have a well-organised distribution network reaching 1,25,000 retail outlets and a strong service network covering more than 450 cities. We have state-of-the-art manufacturing facilities at Faridabad, Noida and Kolkata, which enable us to manufacture consumer-centric, first-to-market products with best-in-class quality and performance.

We take pride in our R&D capabilities, spirit of continuous innovation, and commitment to manufacturing cutting-edge lifestyle electrical solutions. As a trusted brand, our endeavour is not just to adapt but to unravel the latent consumer needs and meet them with apt solutions that make life simpler and experiences better.

Over the years, we have been widely recognised for our product innovations, manufacturing prowess, and excellent customer service. Orient Electric is a consumer validated 'Superbrand.' For, nothing makes us happier than to see a satisfied you.



# FELICITATIONS THAT SPUR US ON



Superbrand India, 2021-22



National Energy  
Conservation Award, 2021



ET-Best Brand Award, 2021



Global Quality, 2015



Icon of the Year, 2015



Make in India Award  
for Excellence, 2015



Star Performer, 2011-2012

# SALIENT FEATURES & BENEFITS OF THE LED TECHNOLOGY



**HIGH POWER FACTOR**  
Power factor more than 0.90



**FLICKER CONTROLLED PRODUCTS\***



**HIGH LIGHT OUTPUT**  
2 times brighter than conventional light sources of similar wattage



**UNIFORM LIGHT DISTRIBUTION**



**Wi-Fi ENABLED\***



**RGB LIGHTS\***  
16 Million Colours





# SMART LED LIGHT RANGE






Wi-Fi Enabled

## ORISMART LED LAMP

OriSmart LED Lamp gives 16 million colour options to light up your home as per your mood. Now you can control lights from anywhere with Orient Smart App and can operate similar products together.

Details	Orismart LED lamp
Rated Wattage	10 W
Lumen	850
Holder Base	B22d
Power Factor	>0.9
Colour Temperature	16million RGB colour
CRI	>80
Housing	Thermoplastic
Protection Class	IP 20
MRP (₹)	2000
Std. Pkg.	20



Rated Wattage	Length (A)	Width (B)
10W	130	74
All dimensions are in mm		



Operate via  
Orient Smart App



Compatible with  
Amazon Alexa  
& Google Home



RGB Lights  
16 Million Colours



Brightness  
Control: 1-100%



Operate Similar  
Lamps Together

### APPLICATIONS



Home



Offices



Retail  
Shops




Showrooms

## ORISMART LED BATTEN

OriSmart LED Batten helps you adjust your home's light as per your mood. Now you can control lights from anywhere with Orient Smart App and can operate similar products together.



Details	Orismart LED Batten
Rated Wattage	20 W
Lumen	2000
Power Factor	>0.90
Colour Temperature	3000K – 6500K
CRI	>80
Housing	Polycarbonate
Protection Class	IP 20
MRP (₹)	2500
Std. Pkg.	20

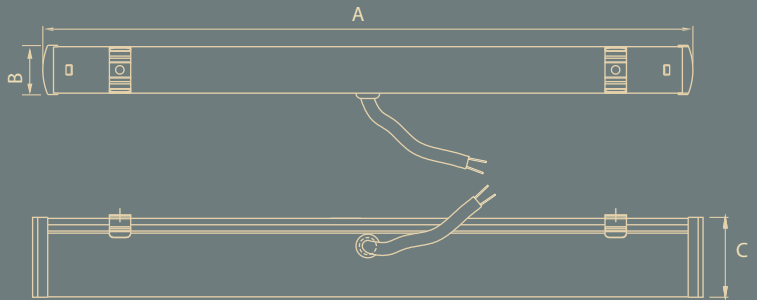

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1185	24	37
All dimensions are in mm			



Operate via  
Orient Smart App



Compatible with  
Amazon Alexa  
& Google Home



3000K to  
6500K CCT



Brightness  
Control: 1-100%



Operate Similar  
Batten Together

### APPLICATIONS



Home



Offices



Retail  
Shops



Showrooms

**FLICKER  
CONTROLLED  
LED RANGE**

**FLICKER IN LED LIGHTS  
IS NOT VISIBLE.  
BUT IT AFFECTS EYE HEALTH.**






## EYELUV LED LAMP

EYELUV LED lamp comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV LED Lamp
Rated Wattage	9W
Lumen	900
Power Factor	>0.90
Colour Temperature	6500K
CRI	> 80
Protection Class	IP 20
Beam Angle	> 180°
MRP (₹)	300
Std. Pkg.	60

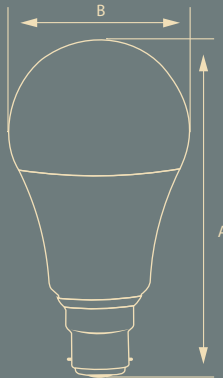

Rated Wattage	Length (A)	Width (B)
9W	112	60
All dimensions are in mm		

## IT'S INVISIBLE. BUT HERE'S HOW TO SEE IT.

- 1 Open your smartphone camera in slow-motion video mode.
- 2 Point the camera towards the lights & check for Flicker.

### APPLICATIONS



Home



School



Colleges



Offices



Malls




Showrooms

## EYELUV LED BATTEN

EYELUV LED batten comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.



Details	EYELUV LED Batten
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Beam Angle	>120°
MRP (₹)	700
Std. Pkg.	20

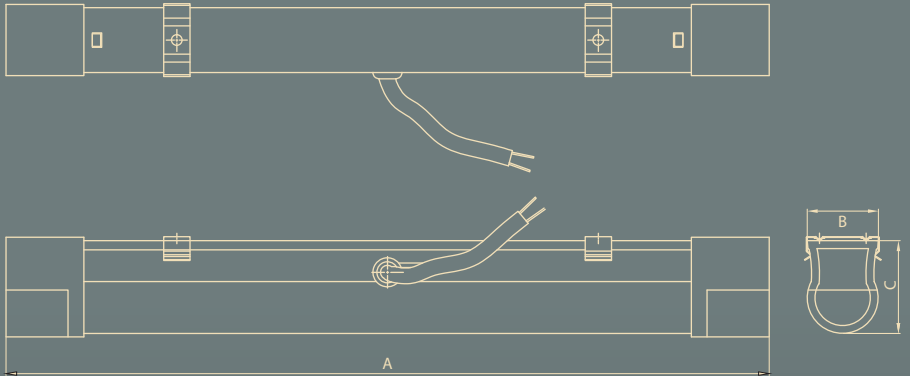

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1100	28	37

All dimensions are in mm

### APPLICATIONS



Home



School



Colleges



Offices



Malls




Showrooms

## EYELUV LED DOWNLIGHTER

EYELUV LED downlighter comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.



Details	EYELUV LED Downlighter
Rated Wattage	5W
Shape	Round
Lumen	450
Power Factor	>0.90
Cut-out Size	Ø90mm
Colour Temperature	6500K / 3000K
MRP (₹)	500
Std. Pkg.	20

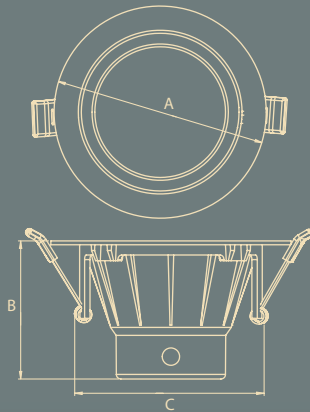

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	105	61	90

All dimensions are in mm

### APPLICATIONS



Home



School



Colleges



Offices



Malls




Showrooms



## EYELUV RECESS PANEL-BACKLIT

EYELUV LED panel comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV Recess Panel - Backlit		
Rated Wattage	10W	15W	20W
Lumen	1000	1500	2000
Power Factor	>0.90	>0.90	>0.90
Shape	Square/Round	Square/Round	Square/Round
Housing	Plastic	Plastic	Plastic
Cut Out Size	Ø105mm	Ø150mm	Ø205mm
Colour Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	>80	>80	>80
Protection Class	IP 20	IP 20	IP 20
MRP (₹)	750	850	1300
Std. Pkg.	20	20	10

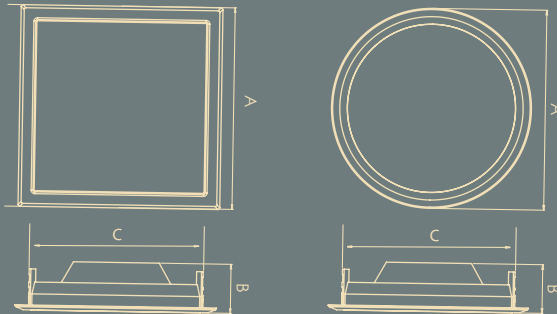

Rated wattage	Length (A)	Height (B)	Cut-Out (C)
10W	116x116	36	105x105
15W	166x166	36	150x150
20W	220x220	36	205x205

All dimensions are in mm

Rated wattage	Length (A)	Height (B)	Cut-Out (C)
10W	116	36	105
15W	166	36	150
20W	220	36	205

All dimensions are in mm

### APPLICATIONS



Home



School



Colleges



Offices



Malls




Showrooms

## EYELUV LED PANEL 2x2


EYELUV LED panel comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.



Details	EYELUV LED Panel 2x2
Rated Wattage	36W
Lumen	3600
Power Factor	>0.90
Shape	Square
Housing	CRCA
Cut Out Size	575x575mm
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
MRP (₹)	4000
Std. Pkg.	4



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
36W	595x595	36	575x575
All dimensions are in mm			

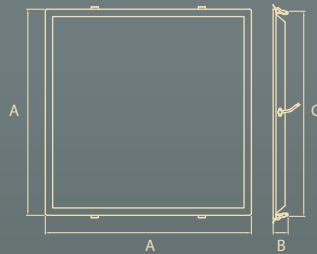

### APPLICATIONS



Home



School



Colleges



Offices



Malls



Showrooms

# EMERGENCY LED LIGHT RANGE

Power gone?



Lights ON!






## EMERGENCY LED LAMP

Emergency LED Lamp gets automatically switched ON during a power cut and runs effectively up to 4 hours. Thus, avoiding any interruptions during power cut.

Details	Emergency LED Lamp	
Rated Wattage	9W	12W
Lumen (AC)	900	1200
Lumen (DC)	350	450
Power Factor	>0.90	>0.90
Colour Temperature	6500K	6500K
CRI	>80	>80
Housing	Thermoplastic	Thermoplastic
Protection Class	IP 20	IP 20
MRP (₹)	950	1150
Std. Pkg.	20	20

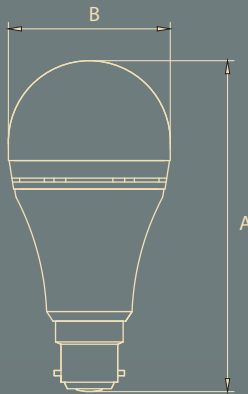

Rated Wattage	Length (A)	Width (B)
9W	140	70
12W	140	70
All dimensions are in mm		



Emergency backup upto 4hrs



Automatic battery charging



Overcharging & deep discharge protection

### APPLICATIONS



Home



Offices



Retail Shops




Showrooms



## EMERGENCY LED BATTEN

Emergency LED batten gets automatically switched ON during a power cut and runs effectively up to 3 hours. Thus, avoiding any interruptions during power cut.

Details	Emergency LED Batten	
Rated Wattage	10W	20W
Lumen (AC)	1000	2000
Lumen (DC)	350	500
Power Factor	>0.90	>0.90
Colour Temperature	6500K	6500K
CRI	>80	>80
Housing	Polycarbonate	Polycarbonate
Protection Class	IP 20	IP 20
MRP (₹)	500	1000
Std. Pkg.	20	10

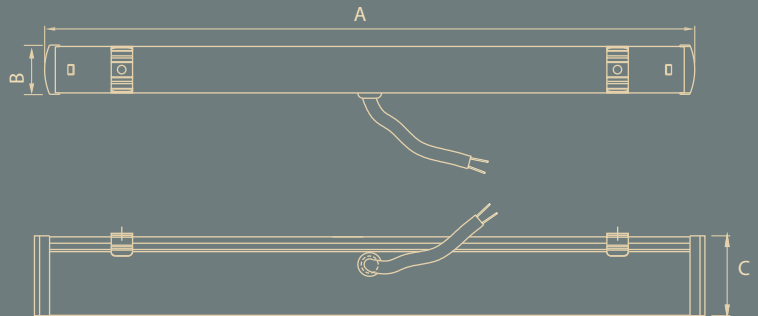

Rated Wattage	Length (A)	Width (B)	Height (C)
10W	598	24	37
20W	1100	24	37

All dimensions are in mm



Emergency backup upto 3hrs



Automatic battery charging



Overcharging & deep discharge protection

### APPLICATIONS



Home



Offices



Retail Shops




Showrooms



## EMERGENCY LED PANEL

Emergency LED Panel gets automatically switched ON during a power cut and runs effectively up to 4 hours. Thus, avoiding any interruptions during power cut.

Details	Emergency LED Panel
Rated Wattage	10W
Lumen (AC)	900
Lumen (DC)	350
Shape	Round
Power Factor	>0.90
Cut-out Size	105mm
Colour Temperature	6500K
CRI	> 80
Housing	Polycarbonate
Protection Class	IP 20
MRP (₹)	1000
Std. Pkg.	20



Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116	36	105

All dimensions are in mm



Emergency backup upto 4hrs



Automatic battery charging



Overcharging & deep discharge protection

### APPLICATIONS



Home



Offices



Retail Shops



Showrooms

## LED LAMP RANGE






**DECO SHINE LED - NIGHT LAMP**

DECO LED Lamp is the perfect solution to use it as a night lamp, consuming negligible power even if you keep it ON for the whole night.

Details	Deco Shine LED - Night Lamp
Rated Wattage	0.5 W
Housing	Polycarbonate
Protection Class	IP 20
Colour	White, Yellow, Green, Red, Pink, Blue
Base	B22d
MRP (₹)	60
Std. Pkg.	48

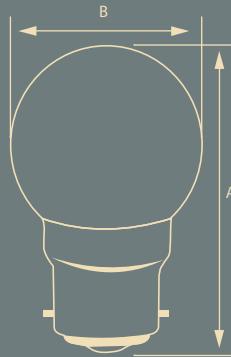

Rated Wattage	Length (A)	Width (B)
0.5W	70	45
All dimensions are in mm		

**APPLICATIONS**



Home



Offices



Retail Shops



Showrooms




### DECO PLUG LED NIGHT LAMP

DECO Plug LED Lamp is the perfect solution as a night lamp, you just need to plug it in your existing 2-pin socket. It consumes negligible power, even if you keep it ON for the whole night.



Details	Deco Plug LED - Night Lamp
Rated Wattage	0.5W
Housing	Polycarbonate
Protection Class	IP 20
Colours	White, Yellow, Green, Red, Blue & Pink
MRP (₹)	95
Std. Pkg.	48

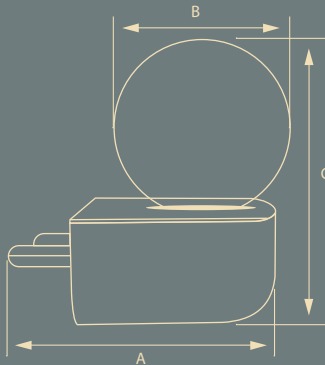

Rated Wattage	Length (A)	Width (B)	Height (C)
0.5W	68	45	70

All dimensions are in mm

**APPLICATIONS**



Home



Offices



Retail Shops



Showrooms



## DECO RAINBOW LED NIGHT LAMP


DECO Rainbow LED Lamp is the perfect solution to decorate your home as it changes colour automatically into seven primary colours and can be used as a night lamp.

Details	Deco Rainbow LED - Night Lamp
Rated Wattage	0.5W
Housing	Polycarbonate
Protection Class	IP 20
Colour Temperature	Auto Colour Changing (7 Primary Colours)
Base	B22d
MRP (₹)	99
Std. Pkg.	48



**7** Automatic colour changes in single bulb

Violet, Indigo, Blue, Green  
Yellow, Orange & Red

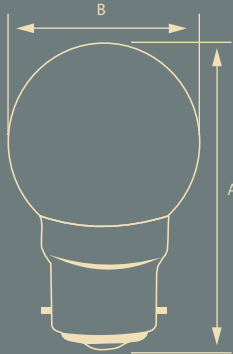

Rated Wattage	Length (A)	Width (B)
0.5W	70	45

All dimensions are in mm

### APPLICATIONS



Home



Offices



Retail Shops




Showrooms

## LED LAMP - ETERNAL SHINE (3W-14W)



Eternal shine LED lamps come with an advanced lighting solution that offers more brightness and saves 80% more energy than the traditional incandescent bulbs.

Details	LED Lamp - Eternal Shine					
	3W	5W	7W	9W	12W	14W
Rated Wattage	3W	5W	7W	9W	12W	14W
Lumen	300	500	700	900	1200	1400
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
CRI	>80	>80	>80	>80	>80	>80
Protection Class	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Base	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	140	150	160	180	275	325
Std. Pkg.	60	60	60	60	60	60



Rated Wattage	Length (A)	Width (B)
3W	98	51
5W, 7W, 9W	100	56
12W, 14W	123	65
All dimensions are in mm		

**APPLICATIONS**



Home



Offices



Shops



Restaurants



General Purpose Lighting



### LED LAMP - ETERNAL SHINE (18W - 26W)

High Wattage-LED Lamp comes with an advanced lighting solution that offers more brightness with wider light spread and saves 80% more energy than the traditional incandescent bulbs.

Details	LED Lamp - Eternal Shine		
Rated Wattage	18W	23W	26W
Lumen	1800	2300	2600
Power Factor	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K
CRI	>80	>80	>80
Beam Angle	>240°	>240°	>240°
Protection Class	IP 20	IP 20	IP 20
Base	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	425	600	650
Std. Pkg.	20	20	20



Rated Wattage	Length (A)	Width (B)
18W	155	80
23W/26W	185	95
All dimensions are in mm		

**APPLICATIONS**



Home



Offices



Shops



Restaurants




General Purpose Lighting

**LED LAMP - ETERNAL SHINE (30W - 60W)**



HIGH Wattage-LED Lamp comes with an advanced lighting solution that offers more brightness with wider light spread and saves 80% more energy than the traditional incandescent bulbs.

Details	LED Lamp - Eternal Shine					
Rated Wattage	30W	40W	45W	50W	55W	60W
Lumen	3000	4000	4500	5000	5500	6000
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	6500K
CRI	>80	>80	>80	>80	>80	>80
Beam Angle	>120°	>120°	>120°	>120°	>120°	>120°
Protection Class	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Base	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	700	800	1000	1200	1400	1600
Std. Pkg.	10	10	10	10	10	10

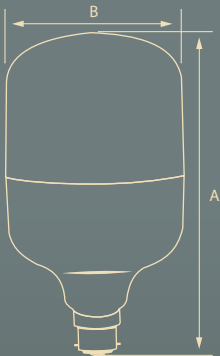

Rated Wattage	Length (A)	Width (B)
30W	184	100
40W/45W	219	120
50W	208	140
55W/60W	250	140
All dimensions are in mm		

**APPLICATIONS**



Home



Offices



Shops



Restaurants




General Purpose Lighting



## LED LAMP - HIGH GLO

High Glo LED Lamp comes with 180° beam angle which provides more brightness with wider light spread. It complies with BEE 3-Star Rating.

Details	LED Lamp - High Glo			
Rated Wattage	8W	10W	12W	15W
Lumen	840	1050	1260	1575
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
CRI	>80	>80	>80	>80
Beam Angle	180°	180°	180°	180°
Base	B22d/E27	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	175	200	300	350
Std. Pkg.	60	60	60	60

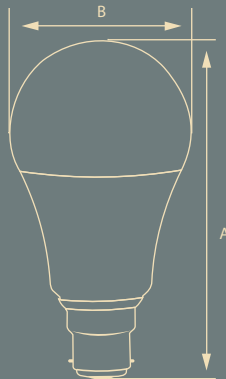


Rated Wattage	Length (A)	Width (B)
8W	112	60
10W	112	60
12W	120	65
15W	125	65

All dimensions are in mm



Normal LED Bulb



High GLO LED Bulb

### APPLICATIONS



Home



Offices



Shops



Restaurants



General Purpose Lighting

# SPECIAL LED LAMP RANGE





### LED LAMP - HIGH GLO RBP

High Glo RBP LED BULB decorates your home with 3 different colour options – Red, Blue, Pink in the same Bulb. You can change the colour as per your mood with the help of ON-OFF switch.

Details	LED Lamp - High Glo RBP
Rated Wattage	7W
Power Factor	>0.90
Colour Temperature	3 in 1 (Red, Blue & Pink)
Base	B22d/E27
Beam Angle	180°
MRP (₹)	250
Std. Pkg.	25




Red



Blue

Rated Wattage	Length (A)	Width (B)
7W	110	60
All dimensions are in mm		

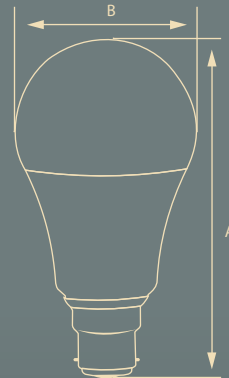

APPLICATIONS



Home



Offices



Shops



Restaurants



General Purpose Lighting



### LED LAMP - 3 in 1 (MOODLIGHT)

Moodlight LED Lamp is designed to provide light in 3 different colour options – Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same lamp. You can change the colour as per your mood with the help of ON-OFF switch.



Details	LED Lamp - 3 in 1 (Moodlight)
Rated Wattage	9W
Lumen	900
Power Factor	>0.90
Colour Temperature	3 in 1 (6500K/4000K/3000K)
CRI	>80
Protection Class	IP 20
Base	B22d
MRP (₹)	225
Std. Pkg.	60




Neutral White



Warm White

Rated Wattage	Length (A)	Width (B)
9W	100	56
All dimensions are in mm		

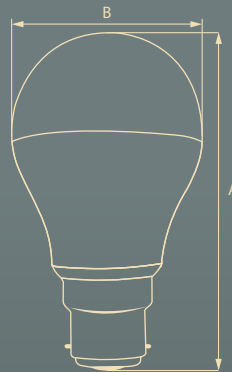

**APPLICATIONS**



Home



Offices



Shops



Restaurants




General Purpose Lighting

**LED LAMP - DECORATIVE**



Decorative LED Lamp decorates every corner of your home and have multiple usages as in chandelier, table lamp, wall lamps etc. These lamps can be easily fitted in normal (B22) and screw (E27 & E14) holder as per requirement.

Details	LED Lamps - Decorative		
	2.7W	4.5W	4.5W
Rated Wattage	2.7W	4.5W	4.5W
Lumen	270	450	450
Power Factor	>0.90	>0.90	>0.90
Colour Temperature	6500K/3000K	6500K/3000K	6500K/3000K
CRI	>80	>80	>80
Protection Class	IP 20	IP20	IP20
Base	E14	E27/B22d	E27/B22d
MRP (₹)	250	275	275
Std. Pkg.	50	50	50

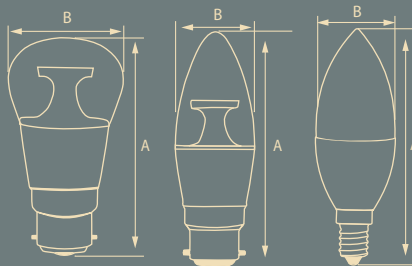

Rated Wattage	Length (A)	Width (B)
2.7W Candle Lamp	106	36
4.5W Candle Lamp	95	50
4.5W Pigmy Lamp	95	50

All dimensions are in mm

APPLICATIONS



Home



Offices



Shops



Restaurants



General Purpose Lighting

## LED LAMP - MULTIPURPOSE (3-STEP DIMMING)



Multipurpose LED Lamp comes with a 3-step dimming function that helps to set the brightness as per your requirement with the help of ON-OFF switch and can be used as night lamp also.

Details	LED Lamp - Multipurpose 15W-8W-0.5W
Rated Wattage	15W
Lumen	1500
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Base	B22d
MRP (₹)	500
Std. Pkg.	20

### Different Lighting Modes with 3 Step Dimming




Switch on the button once for 15W



Switch OFF & ON again for 8W



Switch OFF & ON again for 0.5W

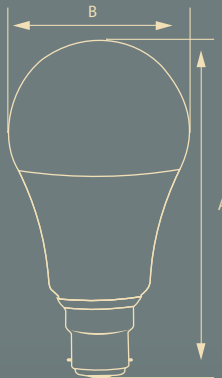

Rated Wattage	Length (A)	Width (B)
15W	123	65
All dimensions are in mm		

#### APPLICATIONS



Home



Offices



Shops



Restaurants



General Purpose Lighting

## MOTION SENSOR LED LAMP



Motion Sensor LED Lamp switches ON by sensing any movement within a range of 15ft and switches off automatically when no motion is detected for 2 min.

Details	LED Lamp - Motion Sensor
Rated Wattage	10W
Lumen	900
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Base	B22d
MRP (₹)	400
Std. Pkg.	25



Stays OFF when no movement detected



Auto ON when it Senses any movement within 15 ft range



Auto OFF after 2 minutes if no movement detected



Rated Wattage	Length (A)	Width (B)
10W	123	65
All dimensions are in mm		

APPLICATIONS



Staircase



Balconies



Store Room



Parking Area



Bathroom

# LED BATTEN RANGE




## LED BATTEN - GRACE DELITE

Grace Delite LED Batten offers modern lighting solutions as per your need and is more efficient than traditional fluorescent tube lights, it comes with plastic housing for better aesthetics.



Details	LED Batten - Grace Delite						LED Batten Grace Elite
	5W	10W	20W	22W	24W	20W	
Rated Wattage	5W	10W	20W	22W	24W	20W	
Lumen	450	1000	2000	2200	2400	2000	
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	
Colour Temperature	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K Red/Blue/Green	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K Red/Blue/Green	
CRI	>80	>80	>80	>80	>80	>80	
Shape	Square	Square	Square	Square	Square	Round	
Protection Class	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	
MRP (₹)	300	450	600	650	650	550	
Std. Pkg.	20	20	20	20	20	20	

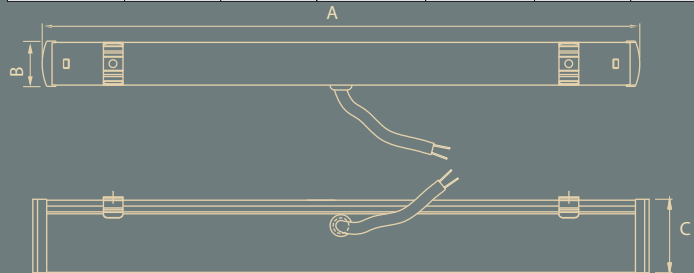

Rated wattage	Length (A)	Width (B)	Height (C)
5W	300	24	37
10W	600	24	37
20W - Elite	1100	21	34
20W	1185	24	37
22W	1100	24	37
24W	1185	24	37

All dimensions are in mm

### APPLICATIONS



Home



Offices



Shops



Restaurants




General Purpose Lighting

## LED BATTEN - SUNLIGHT

Grace Sunlight LED Batten offers modern lighting solutions as per your need and is more efficient than traditional fluorescent tube lights, it comes with aluminium housing for better heat management during long burning hours.



Details	LED Batten - Sunlight			
Rated Wattage	24W	28W	36W	48W
Lumen	2400	2800	4000	5000
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	6500K	6500K	6500K	6500K
CRI	>80	>80	>80	>80
Shape	Square	Square	Square	Square
Protection Class	IP 20	IP 20	IP 20	IP 20
Housing	Aluminium	Aluminium	Aluminium	Aluminium
MRP (₹)	700	800	850	1200
Std. Pkg.	20	20	20	20

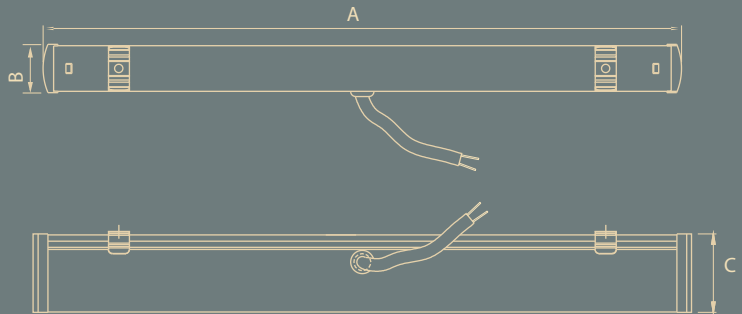

Rated wattage	Length (A)	Width (B)	Height (C)
24W	1185	24	37
28W	1185	24	37
36W	1185	24	37
48W	1185	32	41

All dimensions are in mm

### APPLICATIONS



Home



Offices



Shops



Restaurants



General Purpose Lighting


### LED BATTEN - 3 IN1 (GRACE MOODLIGHT)



MoodLight LED Batten is designed to provide light in 3 different colour options – Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same batten. You can change the light colour as per your mood with the help of ON-OFF switch.



Details	LED Batten - 3 in 1 (Grace MoodLight)
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	3 in 1 (6500K, 4000K, 3000K)
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
Shape	Square
MRP (₹)	650
Std. Pkg.	20

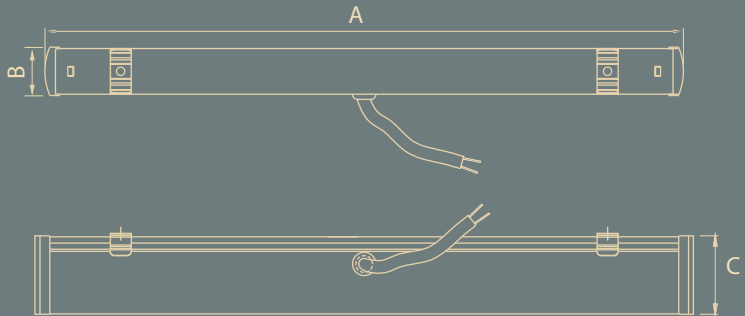

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1135	24	37
All dimensions are in mm			

**APPLICATIONS**



Home



Offices



Shops



Restaurants



General Purpose Lighting




## LED BATTEN - NIGHTGLO

NIGHTGLO LED Batten comes with 2 different modes - Reading and Night lamp. You can choose any mode as per your requirement with the help of ON-OFF switch.



Details	LED Batten - Nightglo
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
Shape	Round
MRP (₹)	700
Std. Pkg.	20

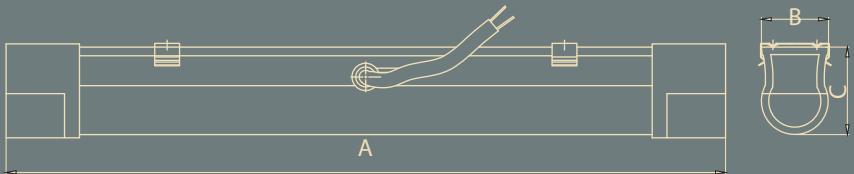

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1135	28	37
All dimensions are in mm			

### APPLICATIONS



Home



Offices



Shops



Restaurants



General Purpose Lighting

## LED BATTEN - MOTION SENSOR

Motion Sensor LED Batten switches ON by sensing the movement of a human being with-in a range of 15 feet and switches OFF automatically when no movement is detected within 15 feet, thus saving electricity.



SENSOR ENABLED



AUTO ON/OFF



Stays OFF when no movement detected




Auto ON when it senses any movement within 15ft range



Auto OFF if no movement is detected after 17 sec.

Details	LED Batten - Motion Sensor
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6500K
Protection Class	IP 20
Housing	Polycarbonate
CRI	>80
MRP (₹)	1000
Std. Pkg.	20

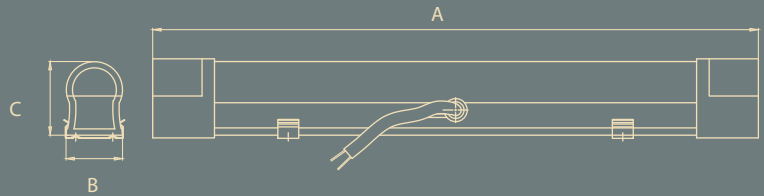

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1135	28	37
All dimensions are in mm			

APPLICATIONS



Staircase



Balconies



Store Room



Parking Area



Bathroom

## LED BATTEN - 3-STEP DIMMABLE

LED Batten comes with a 3-step dimming feature that helps to set the brightness level to 100%-50% -25% as per your requirement with the help of ON-OFF switch.



### Different Lighting Modes with 3-Step Dimming



Switch on the button once for 20W




Switch OFF & ON again for 10W



Switch OFF & ON again for 5W

Details	LED Batten - 3-Step Dimmable
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
Shape	Square
MRP (₹)	700
Std. Pkg.	20

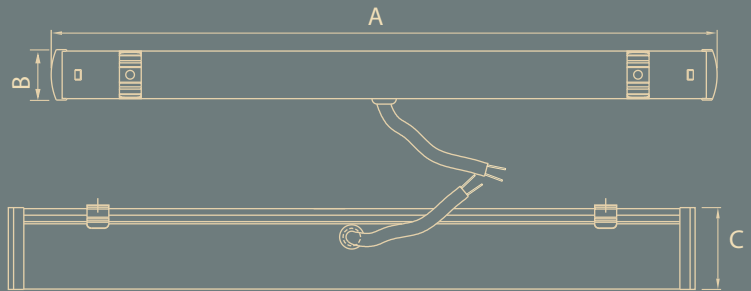

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1185	24	37
All dimensions are in mm			

### APPLICATIONS



Home



Offices



Shops



Restaurants



General Purpose Lighting

## LED TUBE - ORILINA

LED tube offers modern lighting solutions as per your need and is 60% more energy efficient than traditional fluorescent light, it is a retrofit solution for old conventional tube.



Details	LED Tube - Orilina
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
Shape	Round
MRP (₹)	800
Std. Pkg.	20



Rated Wattage	Length (A)	Width (B)
20W	1212	29
All dimensions are in mm		

### APPLICATIONS



Home



Shop



School



Colleges

# LED RECESS PANEL RANGE





**LED RECESS PANEL - METAL**

LED Recess Panel – Metal comes with edge lit technology for glare-free/uniform light distribution and is 60% more energy efficient than traditional downlights, it comes with aluminium housing for better heat management during long burning hours.



Details	LED Recess Panel - Metal				
Rated Wattage	3W	6W	12W	18W	24W
Lumen	240	430	880	1600	2100
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
Shape	Square/Round	Square/Round	Square/Round	Square/Round	Square
Cut-out size (mm)	Square-70x70 Round-Ø70	Square-110x110 Round-Ø110	Square-160x160 Round-Ø160	Square-205x205 Round-Ø205	270x270
Housing	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting
MRP (₹)	400	700	900	1400	1800
Std. Pkg.	20	20	20	06	10



Rated wattage	Length (A)	Width (B)	Cut-Out (C)
3W	85x85	21	70
6W	120x120	21	110
12W	170x170	21	160
18W	225x225	21	205
24W	300x300	21	270

Rated wattage	Length (A)	Width (B)	Cut-Out (C)
3W	85	21	70
6W	120	21	110
12W	170	21	160
18W	225	21	205

All dimensions are in mm

**APPLICATIONS**



Hotels



Offices



Shops



Hospitals



Restaurants





Shopping Complexes

**LED RECESS PANEL - PC**

LED Recess Panel – Polycarbonate comes with edge lit technology for glare-free/uniform light distribution and is 60% more energy efficient than traditional downlights, it comes with sleek housing for better aesthetics.



Details	LED Recess Panel - Polycarbonate				
Rated Wattage	3W	6W	12W	15W	18W
Lumen	225	450	1080	1200	1620
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
Shape	Square/Round	Square/Round	Square/Round	Square/Round	Square/Round
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Cut-out size (mm)	Square-70x70 Round- Ø70	Square-110x110 Round- Ø110	Square-160x160 Round- Ø160	Square-160x160 Round- Ø160	Square-205x205 Round- Ø205
MRP (₹)	350	550	750	800	950
Std. Pkg.	20	20	20	20	10

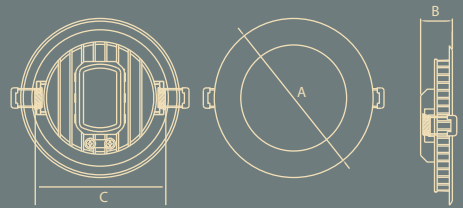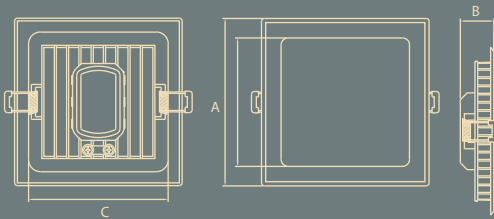

Rated wattage	Length (A)	Width (B)	Cut-Out (C)
3W	80x80	24	70x70
6W	120x120	24	110x110
12W/15W	170x170	24	155x155
18W	220x220	24	205x205

All dimensions are in mm

Rated wattage	Length (A)	Width (B)	Cut-Out (C)
3W	80	24	70
6W	120	24	110
12W/15W	170	24	155
18W	220	24	205

All dimensions are in mm

**APPLICATIONS**



Hotels



Offices



Shops



Hospitals



Restaurants




Shopping Complexes

## LED RECESS PANEL - BACKLIT

These panels come with backlit LED technology that offers higher brightness and saves 80% more energy than traditional downlights.



Details	LED Recess Panel - Backlit			
Rated Wattage	10W	12W	15W	20W
Lumen	900	1200	1500	2000
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K
Shape	Square/Round	Square/Round	Square/Round	Square/Round
Cut-out size (mm)	Square-105X105 Round-Ø105mm	Square-130x130 Round-Ø130mm	Square-150x150 Round-Ø150mm	Square-205x205 Round-Ø205mm
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	700	750	800	1200
Std. Pkg.	20	20	20	10

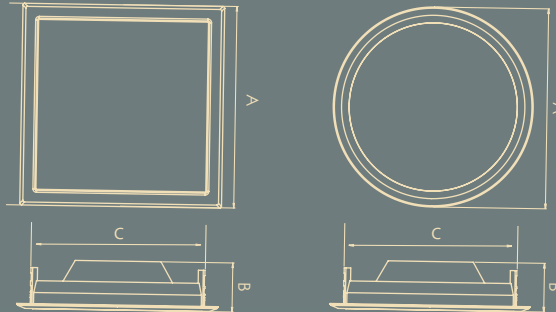

Rated wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116x116	36	105x105
12W	144x144	36	130x130
15W	166x166	36	150x150
20W	220x220	36	205x205

All dimensions are in mm

Rated wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116	36	105
12W	144	36	130
15W	166	36	150
20W	220	36	205

All dimensions are in mm

### APPLICATIONS



Hotels



Offices



Shops



Hospitals



Restaurants



Shopping Complexes




**3 in 1**  
Cool White Neutral White Warm White



### LED RECESS PANEL-3 in 1 (MOODLIGHT)

MoodLight LED panel is designed to provide light in 3 different colour options – Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same panel. You can change the light colour as per your mood with the help of ON-OFF switch.

Details	LED Recess Panel - 3 in 1 (Moodlight)	
Rated Wattage	10W	15W
Lumen	1000	1500
Power Factor	>0.90	>0.90
Colour Temperature	3 in 1 (6500K, 4000K, 3000K)	3 in 1 (6500K, 4000K, 3000K)
Shape	Square/Round	Square/Round
Cut-out size (mm)	Square - 105X105 Round - Ø105mm	Square - 150x150 Round - Ø150mm
Housing	Polycarbonate	Polycarbonate
MRP (₹)	1000	1200
Std. Pkg.	20	20

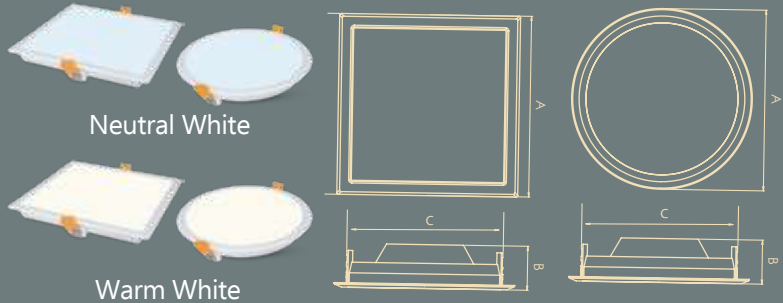

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116x116	36	105x105
15W	166x166	36	150x150

All dimensions are in mm

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116	36	105
15W	166	36	150

All dimensions are in mm

**APPLICATIONS**



Hotels



Offices



Shops



Hospitals



Restaurants



Shopping Complexes

## LED RECESS PANEL - 3-STEP DIMMABLE

Backlit dimmable panel comes with a 3-step dimming feature that helps to set the brightness level to 100%-50% -25% as per your requirement with the help of ON-OFF switch.

### Different Lighting Modes with 3-Step Dimming



Reading Mode  
**20W**

Switch on the button once for 20W



Relax Mode  
**10W**


Switch OFF & ON again for 10W



Ultra mode  
**5W**

Switch OFF & ON again for 5W

Details	LED Recess Panel - 3 Step Dimmable
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6000K
Shape	Square/Round
Cut-out size (mm)	Square- 205x205 Round- Ø205mm
Housing	Polycarbonate
MRP (₹)	1500
Std. Pkg.	10

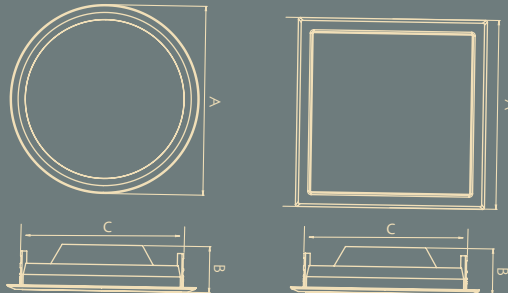

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
20W	220	36	205
All dimensions are in mm			

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
20W	220x220	36	205x205
All dimensions are in mm			

### APPLICATIONS



Hotels



Offices



Shops



Hospitals



Restaurants



Shopping Complexes

# LED SURFACE PANEL RANGE





## LED SURFACE PANEL - METAL

LED Surface Panel provides the best lighting conditions for your ceiling. It comes with aluminium housing for better heat management during long burning hours.



Details	LED Surface Panel - Metal		
Rated Wattage	6W	12W	18W
Lumen	430	880	1600
Shape	Square/Round	Square/Round	Square/Round
Power Factor	>0.90	>0.90	>0.90
Colour Temperature	3000K, 6000K	3000K, 6000K	3000K, 6000K
Housing	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting
MRP (₹)	800	1000	1400
Std. Pkg.	20	20	06



Rated Wattage	Length (A)	Height (B)
6W	80x80	38
12W	126x126	38
18W	175x175	38

All dimensions are in mm

Rated Wattage	Length (A)	Height (B)
6W	80	38
12W	126	38
18W	175	38

All dimensions are in mm

### APPLICATIONS



Residences



Offices



Shop




Malls

## LED SURFACE PANEL - FULL SCREEN



Full Screen surface Panel comes with rimless diffuser that offers better light distribution. Besides, these panels are highly durable, offers better heat dissipation and are easy to install.

Details	LED Surface Panel - Full Screen			
Rated Wattage	6W	12W	18W	24W
Lumen	510	990	1480	1980
Shape	Square/Round	Square/Round	Square/Round	Square/Round
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 6000K	3000K, 6000K	3000K, 6000K	3000K, 6000K
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	800	1000	1400	1800
Std. Pkg.	20	20	20	10

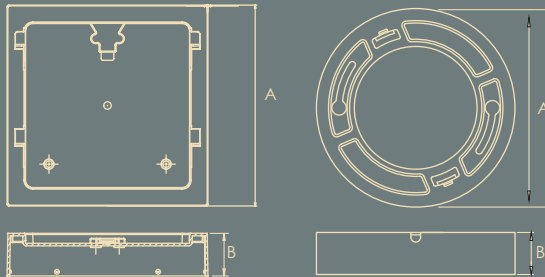

Rated Wattage	Length (A)	Height (B)
6W	91	27
12W	131	27
18W	156	27
24W	190	27
All dimensions are in mm		

### APPLICATIONS



Residences



Offices



Shop




Malls

**LED SURFACE PANEL - STRIKER**

Light up your compact spaces like modular kitchen, wardrobes, showcases etc. with this slim and easy to install LED panel.



Details	LED Surface Panel - Striker	
Rated Wattage	3W	6W
Lumen	200	400
Shape	Round	Round
Power Factor	>0.90	>0.90
Colour Temperature	6500K, 3000K, Red, Blue, Green, Pink	6500K, 3000K, Red, Blue, Green, Pink
Housing	Polycarbonate	Polycarbonate
MRP (₹)	200	400
Std. Pkg.	50	50

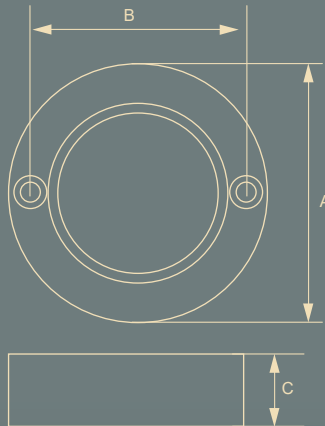

Rated Wattage	Length (A)	Height (C)	Mounting Hole (B)
3W	60	16	45
6W	90	16	75
All dimensions are in mm			

**APPLICATIONS**



Home Decor



Modular Kitchen



Showcases



Wardrobes



Cabinet Lighting

# LED DOWNLIGHTER RANGE




**LED DOWNLIGHTER - MOON LITE**


Moon lite gives elegant look to your home / office. Perfect solution to fix in 3 inches junction box.



Details	LED Downlighter - Moon Lite	
Rated Wattage	5W	9W
Lumen	450	765
Shape	Round	Round
Cut-out size (mm)	Ø75mm	Ø90mm
Power Factor	>0.90	>0.90
Colour Temperature	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink
Housing	Polycarbonate	Polycarbonate
MRP (₹)	400	450
Std. Pkg.	20	20

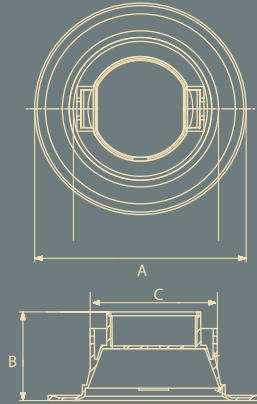

(5W)

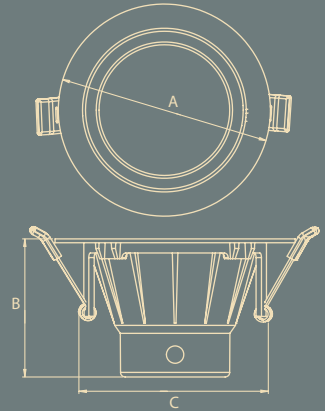

(9W)

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	112	47	75
9W	105	61	90

All dimensions are in mm

**APPLICATIONS**



Residences



Showrooms



Malls



Offices



Educational Institutes




### LED DOWNLIGHTER - MOON LITE (MINI)

Moon lite mini gives elegant look to your home / office. Perfect solution to fix in 2 inches junction box.



Details	LED Downlighter - Moon Lite (Mini)
Rated Wattage	3W
Lumen	240
Shape	Round
Cut-out size (mm)	Ø48mm
Power Factor	>0.90
Colour Temperature	6500K, 3000K, Red, Blue, Green and Pink
Housing	Polycarbonate
MRP (₹)	200
Std. Pkg.	50

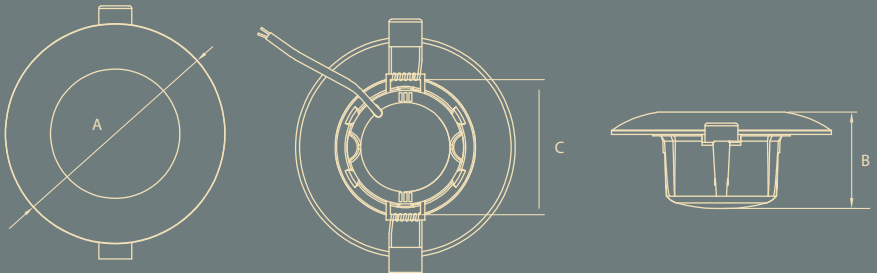

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
3W	81	35	50
All dimensions are in mm			

**APPLICATIONS**



Residences



Showrooms



Malls



Offices



Educational Institutes

**3 in 1**  
Cool White Neutral White Warm White



### LED DOWNLIGHTER - 3 in 1 (MOOD LIGHT)

Mood Light LED downlighter is designed to provide light in 3 different colour options – Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same downlighter. You can change the light colour as per your mood with the help of ON-OFF switch



Details	LED Downlighter - 3 in 1 (Mood Light)
Rated Wattage	5W
Lumen	450
Shape	Round
Power Factor	>0.90
Cut-out Size	Ø90mm
Colour Temperature	3 in 1 (6500K/3000K/4000K)
MRP (₹)	500
Std. Pkg.	20



Neutral White



Warm White



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	105	61	90
All dimensions are in mm			

**APPLICATIONS**



Residences



Showrooms



Malls



Offices



Educational Institutes



### LED DOWNLIGHTER - MULTICOLOUR

Multicolour LED downlighter is designed to provide light in 3 different colour options –RED , BLUE , PINK in the same downlighter. You can change the colour as per your mood with the help of ON-OFF switch.



Details	LED Downlighter - Multicolour
Rated Wattage	5W
Shape	Round
Power Factor	>0.90
Cut-out Size	Ø90mm
Colour Temperature	3 in 1 (Red, Blue & Pink)
MRP (₹)	500
Std. Pkg.	20



Blue



Pink



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	105	61	90
All dimensions are in mm			

APPLICATIONS



Residences



Showrooms



Malls



Offices




Educational Institutes

**LED DOWNLIGHTER - MOON LITE DEEP**



LED Deep downlighter comes with rimless diffusor that offers better light distribution and easy to install in deep junction box with same cut-out for different wattage options.

Details	LED Downlighter - Moon Lite Deep			
Rated Wattage	6W	9W	12W	15W
Lumen	600	900	1200	1500
Shape	Round	Round	Round	Round
Cut-out size (mm)	Ø48mm	Ø48mm	Ø48mm	Ø48mm
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	450	550	650	750
Std. Pkg.	20	20	20	20



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
6W/9W	82	64	48
12W/15W	141	66	48
All dimensions are in mm			

**APPLICATIONS**



Showrooms



Malls



Residences



Educational Institutes

## LED RECESS DOWNLIGHTER - RAINBOW

Rainbow Recess LED Downlighter is available in 4 colour combinations (White + Blue, White + RED, White + Pink, White + Green), you can change the colour as per your need by ON-OFF Switch.



3 Switching Modes



Details	LED Recess Downlighter - Rainbow	
Rated Wattage	6W	12W
Lumen	600	1200
Shape	Round	Round
Power Factor	>0.9	>0.9
Cut-out Dia.	Ø48mm	Ø48mm
Colour Temperature	6500K+Blue, 6500K+RED, 6500K+Pink, 6500K+Green	6500K+Blue, 6500K+RED, 6500K+Pink, 6500K+Green
MRP (₹)	600	1000
Std Pkg.	20	20




Pink



Red



Green

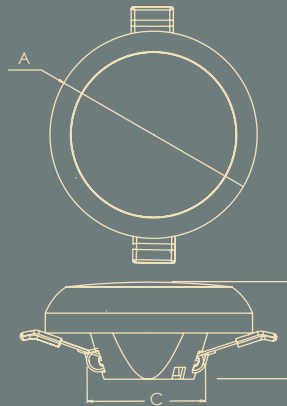

Rated Wattage	Length (A)	Height (B)	Cutout (C)
6W	88	42	48
12W	118	42	48

All dimensions are in mm

**APPLICATIONS**



Residences



Showrooms



Malls



Offices



Educational Institutes

### LED SURFACE DOWNLIGHTER - RAINBOW

Rainbow Surface LED Downlighter is available in 4 colour combinations (White + Blue, White + RED, White + Pink, White + Green), you can change the colour as per your need by ON-OFF Switch.




Details	LED Surface Downlighter - Rainbow	
Rated Wattage	6W	12W
Lumen	600	1200
Shape	Round	Round
Power Factor	>0.9	>0.9
Colour Temperature	6500K+Blue, 6500K+RED 6500K+Pink, 6500+Green	6500K+Blue, 6500K+RED 6500K+Pink, 6500+Green
MRP (₹)	650/-	1100/-
Std Pkg.	20	20





Pink



Red



Green



Rated Wattage	Length (A)	Height (B)	Mounting (C)
6W	86	44	48
12W	140	44	48

All dimensions are in mm

APPLICATIONS



Residences



Showrooms



Malls



Offices



Educational Institutes

# LED SPOT LIGHT




**LED SPOT LIGHT - VIVID (2W)**



LED Spotlights are designed to highlight special corners of your homes and offices to make it more lively. These lights are your perfect modern lighting options.

Details	LED Spot Light - Vivid
Rated Wattage	2W
Lumen	100
Shape	Round
Cut-out size (mm)	Ø32mm
Power Factor	>0.90
Colour Temperature	3000K, 6500K, Red, Blue, Green & Pink
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
MRP (₹)	200
Std. Pkg.	100

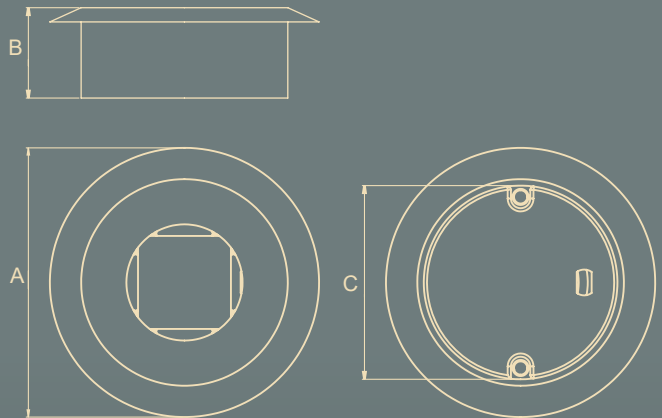

Rated Wattage	Dia (A)	Height (B)	Cut-Out (C)
2W	42	14	32
All dimensions are in mm			

**APPLICATIONS**



Showrooms



Malls



Shelf Lighting



Residences




### LED SPOT LIGHT - VIVID (3W)

LED Spotlights are designed to highlight special corners of your homes and offices to make it more lively. These lights are your perfect modern lighting options, it can be fixed in 2 inches junction box.



Details	LED Spot Light- Vivid
Rated Wattage	3W
Lumen	180
Power Factor	>0.90
Cut-out Size	Ø50mm
Colour Temperature	3000K, 6500K Red, Blue, Pink & Green
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
MRP (₹)	200
Std. Pkg.	50

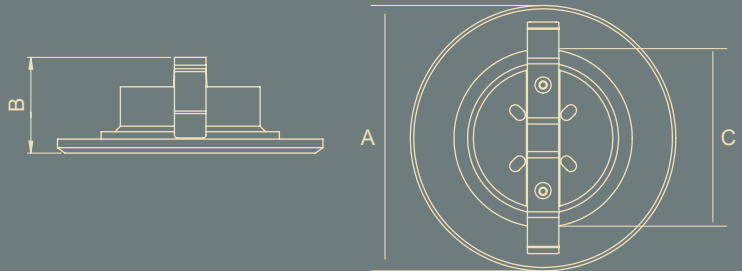

Rated Wattage	Dia (A)	Height (B)	Cut-Out (C)
3W	75	27	50
All dimensions are in mm			

APPLICATIONS



Showrooms



Malls



Shelf Lighting




Residences

### LED COB SPOT LIGHT



LED COB spot light has a unique narrow beam-angle light distribution, slim design that makes it perfect to fix in small height ceiling. It comes with plastic housing for better aesthetics.

Details	LED COB Spot Light			
Rated Wattage	3W	6W	9W	12W
Lumen	240	510	765	1020
Shape	Round	Round	Round	Round
Cut-out size (mm)	Ø52mm	Ø68mm	Ø90mm	Ø115mm
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	6500K, 4000K, 3000K	6500K, 4000K, 3000K	6500K, 4000K, 3000K	6500K, 4000K, 3000K
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Beam Angle	40°	40°	40°	40°
Swivel Arrangement	50°	50°	50°	50°
MRP (₹)	450	600	750	1000
Std. Pkg.	20	20	20	20

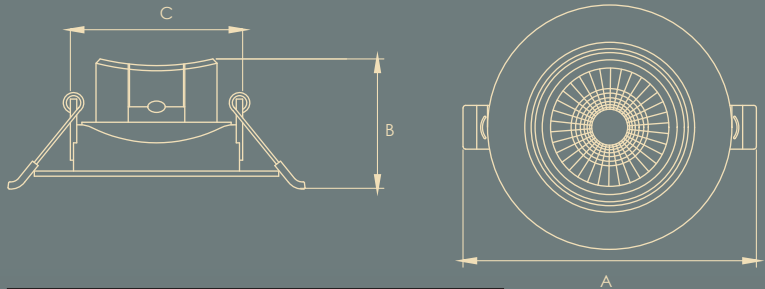

Rated wattage	Dia (A)	Height (B)	Cut-Out (C)
3W	75	43	52
6W	95	46	68
9W	117	55	90
12W	140	55	115

All dimensions are in mm

APPLICATIONS



Jewelers



Showrooms



Shelf Lighting



Art Galleries



Corporate Offices

**LED COB DOWNLIGHTER - DEEP**



LED COB Downlighter has a unique narrow beam-angle light distribution, slim design that makes it perfect to fix in small height ceiling. It comes with aluminium housing for better heat management during long burning hours.



Details	LED COB Downlighter - Deep					
Rated Wattage	3W	6W	9W	15W	18W	24W
Lumen	210	511	750	1200	1500	1920
Shape	Round	Round	Round	Round	Round	Round
Cut-out size	Ø55mm	Ø68mm	Ø68mm	Ø89mm	Ø111mm	Ø111mm
Power factor	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
Colour Temperature	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K
Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Beam Angle	30°	30°	30°	30°	30°	30°
Swivel Arrangement	Upto 60°	Upto 60°	Upto 60°	Upto 60°	Upto 60°	Upto 60°
MRP (₹)	600	800	1000	1500	1800	2500
Std. Pkg.	20	20	20	20	10	10

Rated wattage	Dia (A)	Height (B)	Cut-Out (C)
3W	67	53.5	55
6W	85.5	60	68
9W	85.5	85	68
15W	107.5	95.5	89
18W	137.5	87	111
24W	137.5	116.5	111

All dimensions are in mm



**APPLICATIONS**



Jewelers



Showrooms



Shelf Lighting



Art Galleries




Corporate Offices



## LED COB TRACK LIGHT

LED COB Track light has a unique narrow beam-angle light distribution. It comes with aluminium housing for better heat management during long burning hours.

Details	LED COB Track Light		
Rated Wattage	15W	20W	30W
Lumen	1200	1500	2400
Shape	Round	Round	Round
Power Factor	>0.90	>0.90	>0.90
Colour Temperature	3000K, 6000K	3000K, 6000K	3000K, 6000K
Housing	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting
Beam Angle	38°	38°	38°
MRP (₹)	1200	1800	2200
Std. Pkg.	20	20	20



Rated wattage	Length (A)	Width (B)	Dia (C)	Height (D)
15W	158	103	73	128
20W	158	122	73	135
30W	182	143	87	168

All dimensions are in mm

### APPLICATIONS



Jewelers



Showrooms



Shelf Lighting



Art Galleries



Corporate Offices




## LED SURFACE TRACK LIGHT

LED Surface Track light has a unique narrow beam-angle (38°) light distribution. It comes with aluminium housing for better heat management during long burning hours.

Details	LED Surface Track Light				
Rated Wattage	7W	10W	15W	20W	30W
Lumen	600	800	1200	1600	2400
Shape	Round	Round	Round	Round	Round
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K
Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Beam Angle	38°	38°	38°	38°	38°
MRP (₹)	1000	1050	1300	2000	2500
Std. Pkg.	20	20	20	20	20

Rated wattage	Length (A)	Width (B)	Dia (C)	Height (D)
7W	100	65	46	95
10W	100	82	46	95
15W	140	82	73	135
20W	140	122	73	135
30W	167	143	87	157

All dimensions are in mm



**APPLICATIONS**



Jewelers



Showrooms



Shelf Lighting



Art Galleries




Corporate Offices

# OUTDOOR LIGHTING




## LED STREET LIGHT

LED Street Light provides better lighting, saves up to 80% more energy than HPS/MH streetlights and are perfect for parks, campuses etc.



Details	LED Street Light				
Rated Wattage	20W	24W	30W	40W	70W
Lumen	2200	2400	3300	4400	7700
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
Colour Temperature	6500K	6500K	6500K	6500K	6500K
Protection Class	IP 65	IP 65	IP 65	IP 65	IP 65
MRP (₹)	2200	3000	3000	4500	5500
Std. Pkg.	8	8	8	8	4

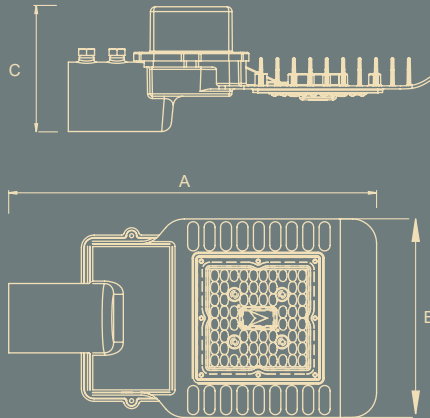

Rated wattage	Length (A)	Width (B)	Height (C)
20W/24W	246	103	85
30W/40W	255	118	85
70W	302	163	107

All dimensions are in mm

### APPLICATIONS



Road



Parks




Parking Area

**LED FLOOD LIGHT (10W - 50W)**

LED Flood light is perfect solution for area lighting such as stadiums, outdoor weddings façade lighting etc. LED Flood Lights is slimmer in design and gives premium aesthetics look.



Details	LED Flood Light (10W - 50W)			
Rated Wattage	10W	20W	30W	50W
Lumen	1000	2000	3000	5000
Power Factor	>0.9	>0.9	>0.9	>0.9
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
Housing	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting
Protection Class	IP 65	IP 65	IP 65	IP 65
MRP (₹)	1500	2500	3500	4500
Std. Pkg.	40	20	10	04

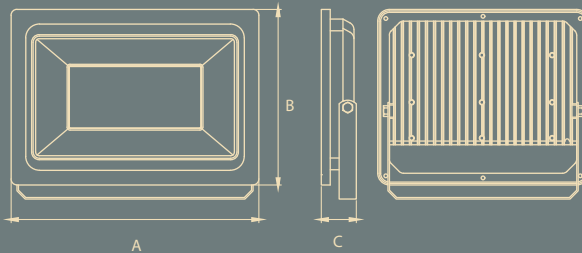

Rated wattage	Length (A)	Width (B)	Height (C)
10W	115	90	29.5
20W	145	110	33.5
30W	185	135	36
50W	205	165	42

All dimensions are in mm

**APPLICATIONS**



Area Lighting



Sports Complex



Hoardings




**LED FLOOD LIGHT (70W - 200W)**



LED Flood light is perfect solution for area lighting such as stadiums, outdoor weddings façade lighting etc. LED Flood Lights is slimmer in design and gives premium aesthetics look.

Details	LED Flood Light (70W - 200W)			
Rated Wattage	70W	100W	150W	200W
Lumen	7000	10000	13500	18000
Power Factor	>0.9	>0.9	>0.9	>0.9
Colour Temperature	3000K, 6500K	3000K, 6500K	3000K, 6500K	3000K, 6500K
Housing	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting
Protection Class	IP 65	IP 65	IP 65	IP 65
MRP (₹)	5500	7000	10000	14000
Std. Pkg.	10	04	05	04

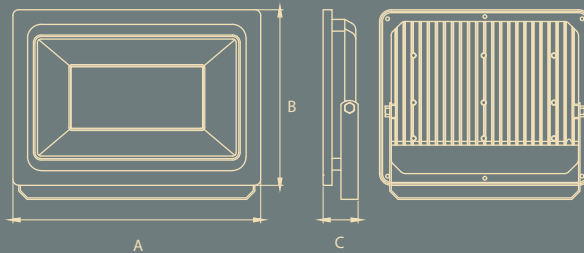

Rated wattage	Length (A)	Width (B)	Height (C)
70W	229	165	40
100W	285	220	48
150W	340	250	55
200W	400	300	55

All dimensions are in mm

**APPLICATIONS**



Area Lighting



Sports Complex




Hoardings

## LED BULKHEAD

LED Bulkhead is easy to install indoor as well as outdoor and gives your home and office space a lively look. It comes with IP65 protection.



Details	LED Bulkhead	
Rated Wattage	5W	12W
Lumen	450	1080
Power Factor	>0.90	>0.90
Colour Temperature	6500K/3000K	6500K/3000K
Housing	Polycarbonate	Polycarbonate
IP Class	IP 65	IP 65
MRP (₹)	350	700
Std. Pkg.	50	50

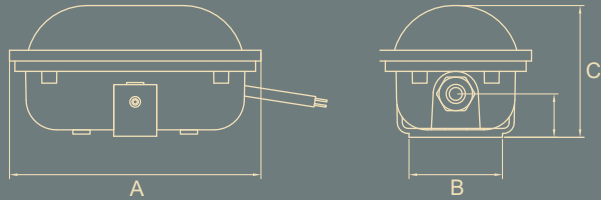

Rated Wattage	Length (A)	Width (B)	Height (C)
5W	117	44	61
12W	165	85	65
All dimensions are in mm			

### APPLICATIONS



Staircase



Balconies




Gardens



Rooftops

# FESTIVE LIGHTS

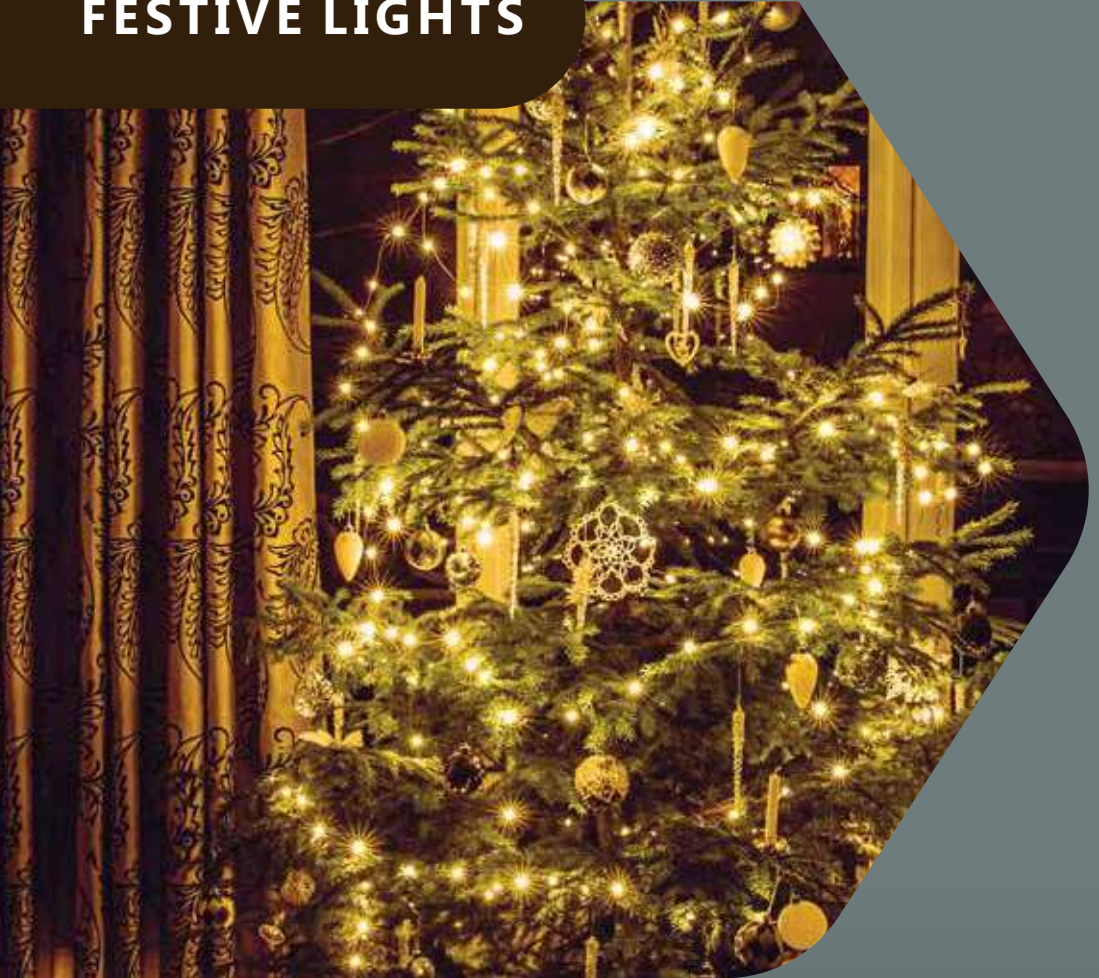



## LED STRIP LIGHT

LED Strip Lights offer a variety of lighting colours and effects to decorate your home. Thus, making them suitable for the Cove lighting.

Details	LED Strip Light		
	24W	24W	48W
Rated Wattage	24W	24W	48W
Lumen	2500	2000	3500
Protection Class	IP 20	IP 65	IP 20
Colour Temperature	6500K, 3000K, Red/Blue/Green/Pink	6500K, 3000K, Blue	6500K, 3000K,
Length	5 meters	5 meters	5 meters
MRP (₹)	800	1000	1000
Std. Pkg.	50	50	50

### APPLICATIONS



Cove Lighting



Showrooms



Decorative Lighting



Malls



## LED FESTIVAL STRING LIGHT - LADI

LED Ladi offers a variety of lighting colours for home decoration during festival and special occasions.

Details	Joylite Garland String Light	Joylite Diamond String Light
Rated Wattage	3W	3W
LED Diameter	5mm	5mm/8mm
Protection Class	IP 20	IP 20
Colour Temperature	White/Warm white/Red/Blue/Green/Pink	RG, RB
Length	10 meters	10 meters
MRP (₹)	450	600
Std. Pkg.	96	96

MADE IN  
INDIA



### APPLICATIONS



Festival Lighting



Wedding & Birthday Decoration



Showrooms



Malls

## ACCESSORIES

### SURFACE MOUNTING RING FOR LED RECESS PANELS



LED Surface mounting rings offer to convert your LED Recess Panel Light to Surface Panels that can be directly mounted on the ceiling.

Details	Surface Mounting Ring for LED Recess Panels					
	6W	12W	18W	10W	15W	20W
Rated Wattage	6W	12W	18W	10W	15W	20W
Shape	Round/Square			Round/Square		
Housing	Polycarbonate			Polycarbonate		
MRP (₹)	250	300	400	150	200	250
Std. Pkg.	20	20	20	20	20	20

### LED DRIVER



LED driver provides the 12V DC output voltage and is suitable to operate 12V DC devices like strip light, modules etc.

Details	24W, 12V/2A	60W, 12V/5A
Rated Wattage	24W	60W
Output Voltage	12V	12V
Output Current (Max.)	2A	5A
Housing	Polycarbonate	Polycarbonate
Design	CV	CV
MRP (₹)	300	700
Std. Pkg.	30	30

### APPLICATIONS

- LED Drivers provide 12V DC output voltage and is suitable to operate devices like strip, modules etc.



## BRANCH OFFICES

### NORTH

<b>Delhi</b>	9654980990	Raj.kumar@orientelectric.com
<b>Ghaziabad</b>	9643433824	deep.rastogi@orientelectric.com
<b>Faridabad</b>	7838550671	munish.kumar@orientelectric.com
<b>Chandigarh</b>	9216478812	sanjeev.talwar@orientelectric.com
<b>Jammu</b>	9216478812	sanjeev.talwar@orientelectric.com
<b>Jaipur</b>	9830600966	biplab.das@orientelectric.com
<b>Lucknow</b>	9554499666	ravi.kumar2@orientelectric.com
<b>Rishikesh</b>	8859014147	dinesh.chandra@orientelectric.com

### WEST

<b>Mumbai</b>	7045779958	Sanjay.shelar@orientelectric.com
<b>Pune</b>	9930511225	ajay.singh@orientelectric.com
<b>Indore</b>	7566201004	sunil.nahatkar@orientelectric.com
<b>Nagpur</b>	9826470988	sandeep.mishra@orientelectric.com
<b>Raipur</b>	9977002729	satyam.dwivedi@orientelectric.com
<b>Ahmedabad</b>	7948906707	anand.deogharia@orientelectric.com

### SOUTH

<b>Bengaluru</b>	9845229798	ananda.kumar@orientelectric.com
<b>Chennai</b>	9655467776	c.gopi@orientelectric.com
<b>Madurai</b>	9994457638	bsenthil.kumar@orientelectric.com
<b>Secunderabad</b>	9052899799	naveen.katta@orientelectric.com
<b>Cochin</b>	9745048800	madhu.s@orientelectric.com
<b>Vijaywada</b>	9642325967	n.srinivasan@orientelectric.com

### EAST

<b>Kolkata</b>	9836643443	prabal.basu@orientelectric.com
<b>Cuttack</b>	9439157701	sudhansu.panigrahi@orientelectric.com
<b>Patna</b>	9934588650	abhay.kumar@orientelectric.com
<b>Ranchi</b>	9934545042	vikash.jaiswal@orientelectric.com
<b>Guwahati</b>	9435142707	ashis.dey@orientelectric.com

## CONSUMER LIGHTING PRODUCT CATALOGUE-APRIL 2022

### Terms and Conditions

- MRP rates are inclusive of GST. These are the maximum recommended prices. However, dealers/retailers are free to sell below the maximum recommended prices.
- The price are subject to change without any prior notice.
- All prices are subject to general terms and conditions of the company.
- Disputes, if any, are subject to Delhi jurisdiction only.
- This price list supersedes all previous price lists.
- Every effort has been made to ensure accuracy in compilation of technical/commercial details within this publication. However, in case of a discrepancy, the management's decision shall be final.
- Specifications and performance data are constantly changing; current details should, therefore, be checked with the company.
- Displayed product images in the catalogue are only for indicative purposes and may differ from the actual product.
- Lumen declared in catalogue is for Cool White (6000K/6500K) CCT at 220-240 Volts.



<https://www.orientelectric.com/pdf/clum.pdf>

Lighting Business Unit  
**Orient Electric Limited**  
C-130, Sector 63, Noida-201301,  
U.P, India

Head Office  
**Orient Electric Limited**  
240, Okhla Industrial Area  
Phase III, New Delhi-110020

**FANS • HOME APPLIANCES • LIGHTING • SWITCHGEAR**

For trade enquiries, e-mail at [business.enquiry@orientelectric.com](mailto:business.enquiry@orientelectric.com) | To own an Orient Smart Shop Franchise, call at 9999386966.

Orient Helpline No:- 1800 103 7574 | Follow us on:     